

## Freestanding Ranges

FFGF3011L W/B

30" Gas



### Product Dimensions

|                          |         |
|--------------------------|---------|
| Height (Max.)            | 45-3/4" |
| Width                    | 29-7/8" |
| Depth (Including Handle) | 29-1/4" |

### More Easy-To-Use Features

**Black Wire Grates**

**Timed Cook Option**

**Electronic Kitchen Timer**

#### Bright Lighting

Our bright lighting makes it easy to see what's inside.

**Manual Clean Oven**

**Broil and Serve™ Drawer**

**LP Gas Conversion**

Available in:



White  
(W)



Black  
(B)

| Burners     | BTU   |
|-------------|-------|
| Right Front | 9,000 |
| Right Rear  | 9,000 |
| Left Front  | 9,000 |
| Left Rear   | 9,000 |

## Signature Features

### Ready-Select® Controls

Select options or control cooking temperature with our easy-to-use controls.

### Even Baking Technology

Our latest technology ensures even baking every time.

### Hi/Lo Broil Option


Offers two-position broiling and variable temperature control for more control.

### Color-Coordinated Oven Door with Large Window

Stylish look with a large window makes it easy to check on what's cooking without opening the door.

| Features  |                             |
|---|-----------------------------|
| Oven Control/Timing System                          | Ready-Select® Controls      |
| Surface Type  | Color-Coordinated Porcelain |
| Sealed Gas Burners                                  |                             |
| Grates  | Black Square Wire           |
| Window  | Large                       |
| Exterior Door Finish                                | Color-Coordinated           |
| Handle Design                                       | Color-Coordinated           |
| Exterior Finish (Side Panels)                       | Color-Coordinated           |
| Convection System                                   |                             |
| Oven Cleaning System                                | Manual Clean                |
| Drawer Functionality                                | Broil                       |
| Oven Controls                                       |                             |
| Bake  | Yes                         |
| Broil   | Low and High                |
| Add-a-Minute  |                             |
| Delay Start   |                             |
| Self-Clean  |                             |
| Quick Clean Option                                  |                             |
| Delay Clean   |                             |
| Kitchen Timer                                       | Yes                         |
| Timed Cook Option                                   | Yes                         |
| Auto Oven Shut-Off                                  |                             |
| Oven Lock-Out                                       |                             |
| Cooktop Features                                    |                             |
| Right Front Burner (BTU)                            | 9,000                       |
| Right Rear Burner (BTU)                             | 9,000                       |
| Left Front Burner (BTU)                             | 9,000                       |
| Left Rear Burner (BTU)                              | 9,000                       |
| Center Extra Zone Burner (BTU)                      |                             |
| Oven Features                                       |                             |
| Capacity (Cu.Ft.)                                   | 4.2                         |
| Oven Light  | 1                           |
| Rack Configuration                                  | 2 Standard                  |
| Baking System                                       | Even Baking Technology      |
| Broiling System                                     | Vari-Broil™ Hi/Lo           |
| Bake Burner/Broil Burner (BTU)                      | 18,000/18,000               |
| Specifications                                      |                             |
| Oven Interior (H x W x D)                           | 17-5/8" x 24-3/8" x 19-3/4" |
| Power Supply Connection Location                    | Left Bottom Rear            |
| Gas Supply Connection Location                      | Right Bottom Rear           |
| LP Gas Conversion Kit                               | Included                    |
| Voltage Rating                                      | 120V/60 Hz/15A              |
| Connected Load (kW Rating) @ 120 Volts <sup>1</sup> | 1.8                         |
| Amps @ 120 Volts                                    | 15                          |
| Shipping Weight (Approx.)                           | 150 Lbs.                    |

<sup>1</sup>For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

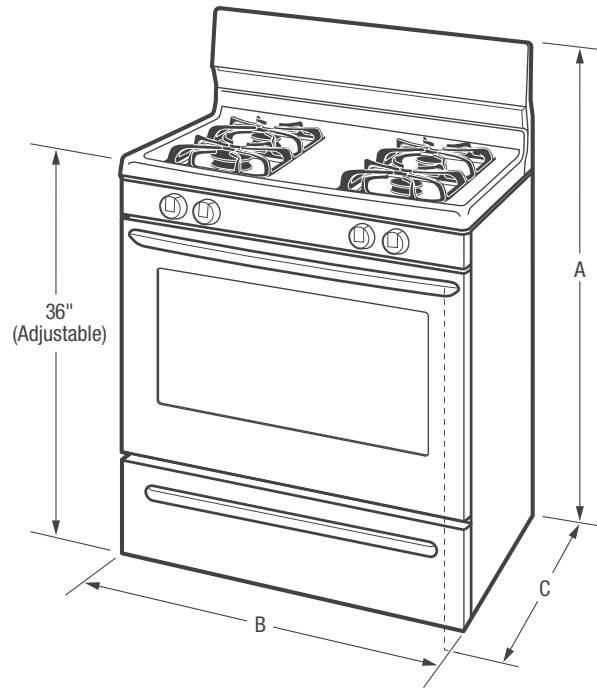


NOTE: For planning purposes only. Always consult local and national electric and gas codes. Refer to Product Installation Guide for detailed installation instructions on the web at [frigidaire.com](http://frigidaire.com).



| Product Dimensions           |         | Cutout Dimensions |     |
|------------------------------|---------|-------------------|-----|
| A - Height (Max.)            | 45-3/4" | Height (Standard) | 36" |
| B - Width                    | 29-7/8" | Width (Min.)      | 30" |
| C - Depth (Including Handle) | 29-1/4" | Depth (Min.)      | 24" |
| Depth with Door Open 90°     | 46-5/8" |                   |     |

Accessories information available on the web at [frigidaire.com](http://frigidaire.com)

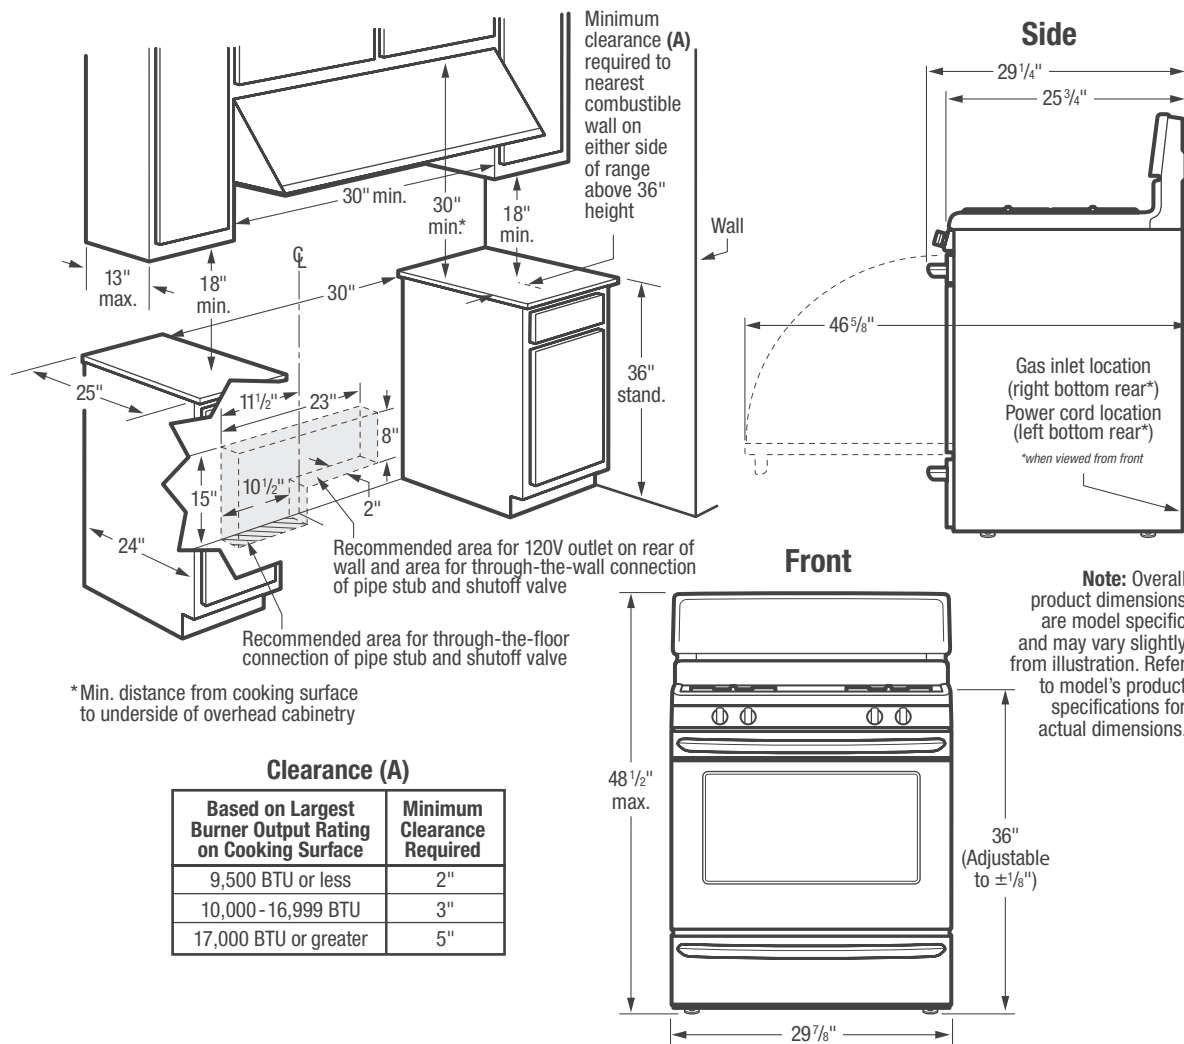

**Note:** Overall product dimensions are model specific and may vary slightly from illustration. Refer to model's product specifications for actual dimensions.

### Freestanding Range Specifications

- Product Shipping Weight (approx.) - 150 Lbs.
- Voltage Rating - 120V/60 Hz/15 Amps
- Connected Load (kW Rating) @ 120 Volts = 1.8kW  
(For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120 Volts = 15 Amps
- Always consult local and national electric and gas codes.
- Make sure wall coverings around range can withstand heat generated by range.
- Linoleum or any other synthetic floor covering located beneath range, must be capable of withstanding minimum heat of 90°F above room temperature without shrinking, warping or discoloring. Insulating pad or 1/4"-thick plywood required between range and a carpeted floor.
- Do not obstruct flow of combustion air at oven vent nor around base or beneath lower front panel of range. Range requires fresh air for proper burner combustion.
- Do not install range beneath any downward-blowing, overhead vent hood or air curtain.

- Range ships with 3/4" factory regulator.
- LP Gas Conversion Kit supplied.
- Floor beneath range MUST be solid and level.
- Overhead cabinetry should not exceed a 13" maximum depth.
- Absolute minimum horizontal distance between overhead cabinets installed to either side of appliance must be no less than maximum width of appliance.
- Range can be installed flush to wall with 0" minimum rear clearance.
- Minimum clearance required (from edge of rangetop to nearest combustible wall on either side of range above 36" height) is based on largest burner output rating on cooking surface.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.
- Follow all dimension requirements provided to prevent property damage, potential fire hazard, and incorrect countertop and cabinet cuts.

**Note:** For planning purposes only. Refer to Product Installation Guide on the web at [frigidaire.com](http://frigidaire.com) for detailed instructions.