

## FFLG3900UW

### LAUNDRY CENTER

**3.9 CU. FT. WASHER D.O.E.**  
**5.5 CU. FT. DRYER D.O.E.**  
**GAS**



#### AVAILABLE COLORS



#### PRODUCT DIMENSIONS

Height	76"
Width	27"
Depth	31-1/2"

#### MORE EASY-TO-USE FEATURES

##### 10 Wash Cycles

Features 10 wash cycles to meet all of your washing needs such as Delicate, Activewear, Bulky and Colors.

##### 6 Dry Cycles

Features 6 dry cycles to meet all of your drying needs such as Delicate, Activewear, Bulky, and Air Fluff.

##### 4 Timed Dryer Cycles

Select your desired drying time limit that works with your schedule.

##### Cycle Status Lights

Green LED lights keep you informed on when the cycle is washing, rinsing, spinning and done.

##### End-of-Cycle Signal

Always know when your laundry is done with the end-of-cycle beep.

### SIGNATURE FEATURES

#### Excellent Cleaning Performance

The movement of the agitator gives you an excellent cleaning performance to ensure your clothes come out clean.

#### MaxFill™

MaxFill™ option allows for the maximum water level for the selected cycle.

#### Largest Washer Capacity

Fit more in every load with 3.9 cu. ft. washer capacity.

#### Quick Wash and Dry Cycles

Get a load done faster with quick wash and quick dry cycles.

# FFLG3900UW LAUNDRY CENTER

**GAS**

**FRIGIDAIRE**

## WASHER FEATURES

Washer Type	Top Load
Total Capacity D.O.E. (Cu.Ft.)	3.9
Controls	Ready-Select®
Washer Interior	Stainless Steel
Vibration Control System	Yes
Wash System	Agitator
Fresh Water Rinse	Yes
Water Level Adjustments	3
Bleach Dispenser/Detergent Dispenser	Yes/No
Cycle Signal	Yes
Agitate Speeds (Strokes/Min.)	Variable
Spin Speeds (RPM)	850

## WASH CYCLES

Wash Cycles	10
-------------	----

## WASHER OPTIONS

Temperature Selections	3
Water Levels	3 Options

## DRYER FEATURES

Total Capacity D.O.E. (Cu.Ft.)	5.5
Dryer Drum Interior	Painted Steel
Cycle Signal	Yes
Tumble Speed (RPM)	50
Lint Screen	Yes

## DRY CYCLES

Dry Cycles	6
------------	---

## DRYER OPTIONS

Temperature Selections	3
Dryness Level Selections	0
Timed Dry (Minutes)	15, 30, 60, 90

## OPTIONAL ACCESSORIES

Mobile Home Installation Kit	PN# 137067200
LP Gas Conversion Kit	PN# PCK3100
Drain Hose Extension Kit	PN# 134592700


## SPECIFICATIONS

Maximum Exhaust Duct Length <sup>1</sup> (Ft.)	56
Gas Connection	Rear
Power Supply Connection Location	Middle Rear
Water Inlet Connection Location	Right Rear
Voltage Rating	120V/60Hz/15A
Connected Load (kW Rating) @ 240 Volts	1.03
Amps @ 240 Volts	13
Heating Element @ 240 Volts (Watts)	20,000
Shipping Weight (Approx.)	275 Lbs.

<sup>1</sup>Rigid metal duct preferred, semi-rigid optional and allow deductions for elbows and vents. Refer to Installation Guide on web for additional information.

## PRODUCT DIMENSIONS

A - Height	76"
B - Width	27"
C - Depth	31-1/2"
Depth with Door Open 90°	47-1/2"

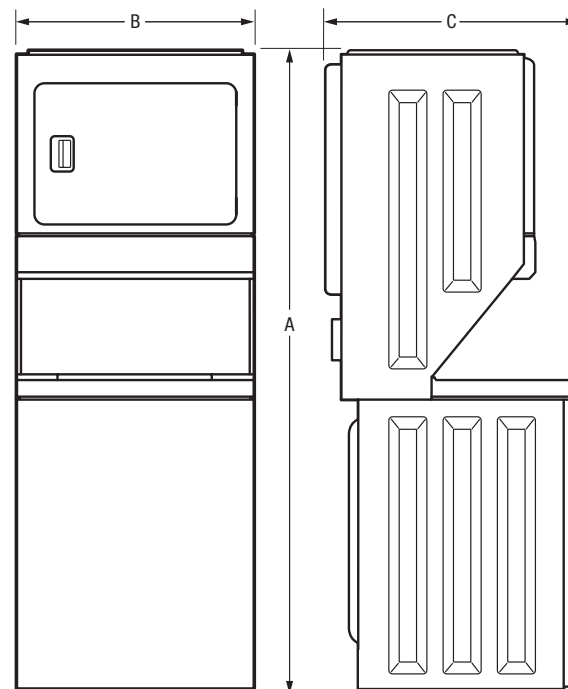

**Note:** For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at [frigidaire.com](http://frigidaire.com).


Specifications subject to change. Accessories information available on the web at [frigidaire.com](http://frigidaire.com)



**FRIGIDAIRE**

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • [frigidaire.com](http://frigidaire.com)  
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • [frigidaire.ca](http://frigidaire.ca)

FFLG3900U 03/18  
© 2018 Electrolux Home Products, Inc.

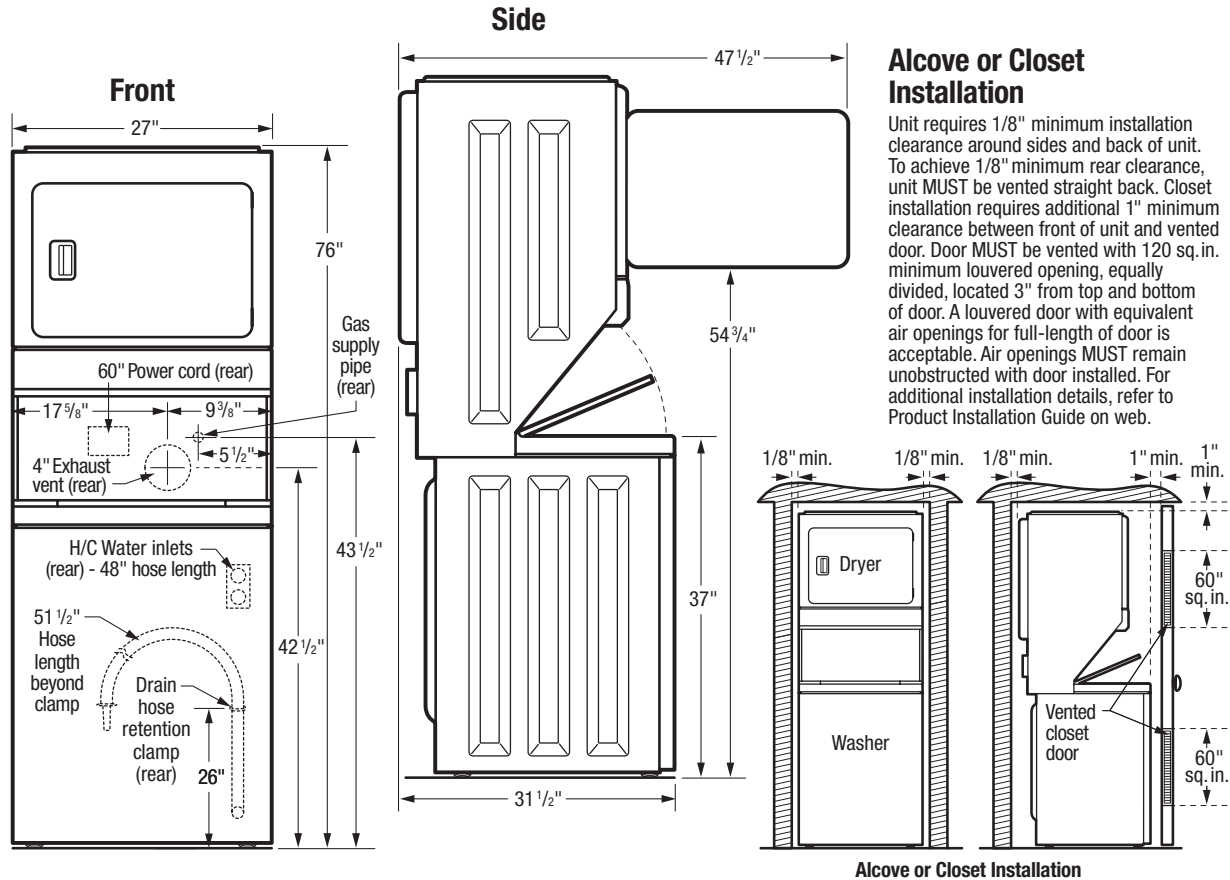

## INSTALLATION SPECIFICATIONS

- Product Shipping Weight (approx.) – 275 Lbs.
- Designed for HOME USE only, not recommended for commercial application.
- An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (ANSI/NFPA 70) and local codes & ordinances.
- Voltage Rating – 120V/60Hz/15A
- Amps @ 120 Volts = 13
- Connected Load (kW Rating) @ 120 Volts = 1.03 kW
- Unit equipped with 120V 3-wire power supply cord, approx. 60" long.
- Always consult local and national electric, plumbing & gas codes.
- Can be installed in alcove or closet requiring 1/8" minimum installation clearance around sides and back of unit. To achieve 1/8" minimum rear clearance, dryer MUST be vented straight back. Closet installation requires additional 1" minimum clearance between front of unit and vented door. Door MUST be vented with 120 sq. in. minimum louvered opening, equally divided, located 3" from top and bottom of door. A louvered door with equivalent air openings for full-length of door is acceptable. Air openings MUST remain unobstructed with door installed. (For additional installation details, refer to Product Installation Guide on web.)
- Do NOT install in area exposed to dripping water or outdoor weather conditions; where gasoline or other flammables are kept or stored; or where dryer comes in contact with curtains, drapes or anything that will obstruct flow of combustion and ventilation air.
- For garage installation, dryer MUST be located minimum 18" above floor.
- Floor MUST be solid with 1/2" maximum slope. Do NOT install on carpeted surface.
- Dryer MUST exhaust to outside of building, NOT into any concealed space.
- Exhaust installation requires minimum 4"-diameter rigid or semi-rigid metal duct with approved, unobstructed vent hood having swing-out damper(s). If installing rigid metal duct (preferred), do not exceed MAXIMUM venting run length of 56 ft., allow deductions for elbows and vents. If installing semi-rigid metal duct, do not exceed MAXIMUM venting run length of 8 ft., always allow deductions for elbows and vents (Refer to Product Installation Guide on web for additional information). Do NOT use flexible plastic or metal foil duct and use shortest run possible.
- Flush-to-wall installation allows for 4-way exhausting — straight back, down, left and right. While vertical exhausting is acceptable, certain circumstances could affect dryer's performance; and unit will be positioned 4-1/2" from wall. (Flush-to-wall exhausting may be done by going below dryer, then sideways.)
- H/C water faucets MUST be installed within 42" of washer's water inlet and MUST be 3/4" with threading for laundry hose connection to connect to 48" inlet hoses.
- Water pressure MUST be between 20 and 120 psi with NOT more than 10 psi pressure difference between hot and cold.
- Drain standpipe requires diameter of 1-1/4" min. and height of 33" min./65" max. above floor, capable of eliminating 17 gallons per minute. Attached 52" drain hose can reach 65"-high standpipe.
- Gas supply line should be 1/2" pipe and MUST have individual shutoff valve.
- Leveling legs supplied to level dryer properly and reduce excessive noise and vibration.
- For manufactured or mobile home installation optional Mobile Home Installation Kit (PN# 137067200) required. (For specific installation details, refer to Product Installation Guide on web.)

### OPTIONAL ACCESSORIES

- Mobile Home Installation Kit – (PN# 137067200).
- LP Gas Conversion Kit – (PN# PCK3100).
- Drain Hose Extension Kit – (PN# 134592700).

**Note:** For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at [frigidaire.com](http://frigidaire.com).

Specifications subject to change. Accessories information available on the web at [frigidaire.com](http://frigidaire.com)

