

DA 6891

36-inch countertop extractor

optional external or internal blower for maximum versatility.



- Striking design – telescopic canopy 36 1/8 (916) in (mm) inches wide.
- Powerful – 423.78 (720) ft<sup>3</sup>/min (m<sup>3</sup>/h) in Booster level
- Practical – 15-minute automatic blower run-on
- Suitable for every home – vented or recirculating
- For perfect functionality – accessories for proper venting

EAN: 4002515823972 / Material number: 10595910 /  
Old Material Number: 28689150USA


| General information                                                           |                    |
|-------------------------------------------------------------------------------|--------------------|
| Model number                                                                  | DA 6891            |
| Manufacturer material number                                                  | 10595910           |
| EAN number                                                                    | 4002515823972      |
| Marketing class                                                               | Gold               |
| Design                                                                        |                    |
| Downdraft                                                                     | •                  |
| Appliance type and design                                                     |                    |
| Appliance color                                                               | Stainless steel    |
| Operating modes                                                               |                    |
| Recirculated mode                                                             | Can be retrofitted |
| Recirculation conversion kit (order separately)                               | DUU 2900-900       |
| OdorFree charcoal filter (order separately)                                   | DKF18-900          |
| Design                                                                        |                    |
| Edge extraction                                                               | •                  |
| User convenience                                                              |                    |
| Electronic controls                                                           | •                  |
| Power levels (number excl. Intensive)                                         | 3                  |
| Booster levels                                                                | 1                  |
| Run-on time 15 min.                                                           | •                  |
| Hood in Motion                                                                | •                  |
| Filter system                                                                 |                    |
| Number of dishwasher-safe stainless steel grease filters                      | 2                  |
| Lighting                                                                      |                    |
| Number x W                                                                    | 1x6W               |
| Light intensity in Lx                                                         | 280 lx             |
| Color temperature in K                                                        | 4000 Kelvin        |
| Exhaust air                                                                   |                    |
| Air throughput in CFM in Booster                                              | 240                |
| Air throughput with Booster level 1 (m <sup>3</sup> /h) according to EN 61591 | 423.78 (720)       |
| Safety                                                                        |                    |
| Safety shut-off                                                               | •                  |
| Single-ply safety glass (ESG)                                                 | •                  |
| Technical data                                                                |                    |
| Canopy width in in.(mm)                                                       | 36 1/8 (916)       |
| Overall min. height for vented and external in in. (mm)                       | 41 3/8 (1052)      |
| Overall max. height for vented and external in in. (mm)                       | 41 3/8 (1052)      |
| Canopy height in in.(mm)                                                      | 25 3/8 (646)       |
| Overall min. height for recirculation in in. (mm)                             | 41 3/8 (1052)      |
| Canopy depth in in.(mm)                                                       | 13 7/8 (351)       |
| Overall max. height for recirculation in in. (mm)                             | 41 3/8 (1052)      |
| Electrical plug                                                               | US earthed plug    |
| Net weight in lbs. (kg)                                                       | 60 (27.0)          |
| Length of electrical wire in ft (m)                                           | 492 (150.0)        |
| Standard plug fitted                                                          | •                  |
| Number of phases                                                              | 1                  |
| Total connected load in kW                                                    | 0.34               |

DA 6891  
36-inch countertop extractor  
optional external or internal blower for maximum versatility.




|                                                                                      |         |
|--------------------------------------------------------------------------------------|---------|
| EAN: 4002515823972 / Material number: 10595910 /<br>Old Material Number: 28689150USA |         |
| Voltage in V                                                                         | 120     |
| Fuse rating in A                                                                     | 10      |
| Frequency in Hz                                                                      | 60      |
| Installation note                                                                    |         |
| Vent connection at top,rear,side,bottom                                              | •       |
| Diameter of vent connection in in.(mm)                                               | 6 (150) |
| Standard accessories                                                                 |         |
| Reducer from 150 to 125 mm Ø                                                         | •       |

## DA 6891 36-inch countertop extractor optional external or internal blower for maximum versatility.

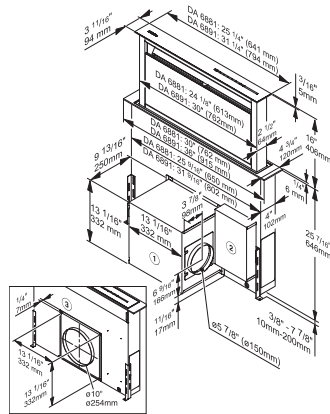



DA 6881, DA 6891 Downdraft (Installation drawing)

1) The DAG 600 motor can be rotated for installation, so exhaust air can be extracted upwards, left, right or downwards., 2) The connection box can be positioned anywhere in the cabinet. The DA 6891 can be mounted to the left, right or behind the fan., 3) Cover for use with the DAG 1000 external fan. The DAG 600 or the cover for the DAG 1000 fan can also be installed in the same position at the back of the appliance.

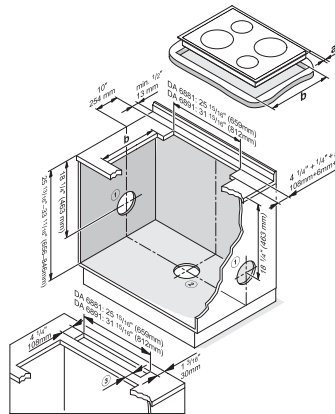

DA 6881, DA 6891 Downdraft (Installation drawing)

1) Exhaust air can be extracted to the left or right, 2) Exhaust air extraction downwards, a) Hob overlap, b) Hob cut-out, 3) If a downdraft system and a hob are installed in separate cut-outs it is important to ensure sufficient stability of ridges., If the appliances is installed behind the downdraft system it must be ensured that there is adequate space.

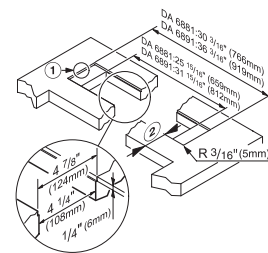

DA 6881, DA 6891 Downdraft (Installation drawing)

1) Stepped cut-out for granite or marble worktops, 2) If downdraft system and hob are installed in separate cut-outs it is important to ensure sufficient stability of ridges.