

DAP 1927

36-inch wall-mounted ventilation hood

with EasySwitch light-touch switches for convenient operation and LED lighting



- Timeless design – stainless steel canopy 35 3/8 (898) in (mm) wide
- Powerful – 512.06 (870) ft³/min (m³/h) in Booster level
- Efficient filtration- 10-ply stainless steel grease filters
- Safe and easy to clean – Miele CleanCover
- Suitable for every home – vented or recirculating

EAN: 4002516878889 / Material number: 12784050 /

Old Material Number: 28P1927SUSA

General information	
Model number	DAP 1927
Manufacturer material number	12784050
EAN number	4002516878889
Marketing class	Silver
Design	
Wall ventilation hood	•
Construction type and design	
Color	Stainless steel
Operating modes	
Recirculated mode	Can be retrofitted
Recirculation conversion kit (order separately)	DUW 20
OdorFree charcoal filter (order separately)	DKF12-900P
User convenience	
Electronic controls	•
Power levels (number excl. Intensive)	3
EasySwitch	•
Operation	EasySwitch
Booster levels	1
Cleaning convenience	
Easy to clean canopy interior CleanCover	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	3
Lighting	
Number x W	3 x 3 W
Light intensity in lx	450 lx
Color temperature in K	3000 Kelvin
Blower	
Dual-action blower	•
Exhaust air	
Air throughput in CFM in Booster	510
Air throughput in Intensive setting (cfm)	512.06 (870)
Safety	
Safety shut-off	•
Technical data	
Canopy width in in.(mm)	35 3/8 (898)
Overall hood height for vented mode and external in inches (mm)	27 (685)–39 5/8 (1005)
Overall height for recirculation mode ventilation hoods in mm	32 1/8 (815)–44 5/8 (1135)
Overall min. height for vented and external in in. (mm)	27 (685)
Overall max. height for vented and external in in. (mm)	39 5/8 (1005)
Canopy height in in.(mm)	2 1/2 (62)
Overall min. height for recirculation in in. (mm)	32 1/8 (815)
Canopy depth in in.(mm)	19 5/8 (500)
Overall max. height for recirculation in in. (mm)	44 5/8 (1135)
Minimum height above electric hobs in mm	24 (610)

DAP 1927

36-inch wall-mounted ventilation hood

with EasySwitch light-touch switches for convenient operation and LED lighting



EAN: 4002516878889 / Material number: 12784050 /

Old Material Number: 28P1927SUSA

Minimum height above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
---	----------

Electrical plug	NEMA plug: 5–15
Net weight in lbs. (kg)	56 (25.0)
Length of electrical wire in ft (m)	492 (150.0)
Standard plug fitted	•
Total connected load in kW	0.35
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Frequency in Hz	60

Installation note

Vent connection at top	•
Diameter of vent connection in in.(mm)	6 (150)
Telescopic chimney	•


Standard accessories

Non-return flap	•
-----------------	---

DAP 1927

36-inch wall-mounted ventilation hood

with EasySwitch light-touch switches for convenient operation and LED lighting

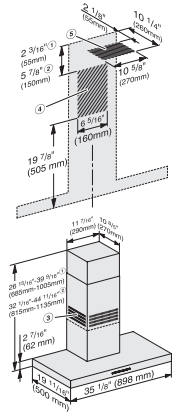

PUR98W, DAP1927 (Installation drawing) – USA/CDN

1) Extraction, 2) Recirculation, 3) Ventilation grille at top for recirculation, 4+5) Installation cut-out (5 not required for recirculation)