



AVAILABLE FROM NOVEMBER 2026

<i>EAN code</i>	<i>8034122370484</i>
<i>Model Code</i>	<i>FIVENF34B12SS-R Insert - 34" (87 cm) - Stainless Steel - 1200 CFM</i>
<i>Collection</i>	<i>Built-in</i>

FEATURES AND PROPERTIES

<i>Materials/Finishes</i>	<i>Scotch brite stainless steel</i>
<i>Lighting</i>	<i>Strip LED 2x2.3 W</i> <i>Dynamic LED Light (2700K - 5600K)</i>
<i>Control</i>	<i>Electronic control</i>
<i>Installation type</i>	<i>Insert</i>
<i>Ducting type</i>	<i>External ducting/Recirculating</i>
<i>Filters</i>	<i>Professional baffle filters, removable and dishwasher safe</i> <i>Charcoal filter (optional)</i>
<i>Dimensions</i>	<i>34 in</i>
<i>Features</i>	<i>Dual motor</i> <i>Flush frame</i> <i>SRS Speed reduction system</i>

OPTIONAL ACCESSORIES

<i>Code</i>	<i>Description</i>
103050091	103050091 FFCHAR3C0BL - Round charcoal filter Ø 6" - Type 6
KACL.815	KACL.815 Protective cleaning cloths for stainless steel (box 10 pcs)

ELECTRICAL CONNECTION AND CONSUMPTION

Maximum consumption	680W
Voltage/Frequency	110-120V 60Hz
Connection type	Hood comes standard with Nema 5-15P power cord

BLOWER PERFORMANCE

Motor	2x600 CFM
-------	-----------


TECNICAL SPECS OF COOKERHOOD WITH 1200 CFM MOTOR

Motor Speed	SRS 2*		SRS 3*	
	1	2	3	4
CFM (rated at the motor)	420	590	790	1200
Sones (estimated value)	4.5	6	7.5	9
Duct Size	10" / 2 x 6"	10" / 2 x 6"	10" / 2 x 6"	10" / 2 x 6"


*If activated SRS has 2 settings; 3 speed max & 2 speed max

WEIGHTS AND DIMENSIONS


Gross weight	0 lbs
Net weight	0 lbs
Packaging dimensions	L 0 in H 1 in D 0 in
Notes	Recommended mounting height from cooking surface to hood bottom: 24" - 35"

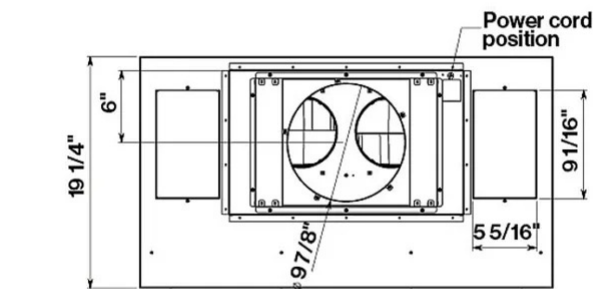

Top view

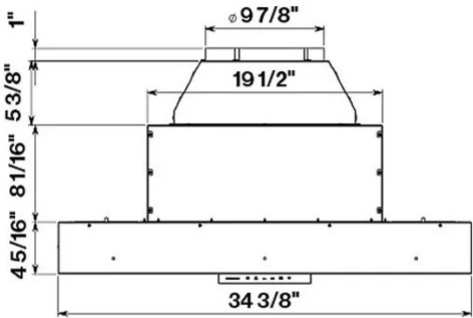

Front view

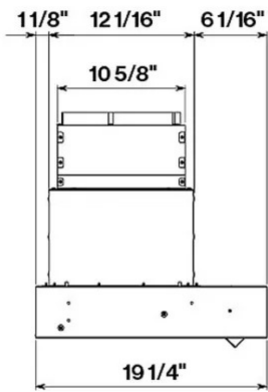

Side view



Hole sizes