

# 36" GAS COOKTOP



MODEL CODE

400 SERIES

**F4MTGK36S1**



Heavy-Duty Grates



Continuous Grate Surface



Dual-Flame Burner



Automatic Reignition System



Brass Burners



Americans with Disabilities Act †

## DESCRIPTION

The Matteo 400 series 36" gas cooktop combines sophisticated design with powerful performance, featuring brass burners and a Traditional layout with a central wok burner. Its clean, contemporary design complements a wide range of kitchen aesthetics while providing a practical, user-friendly cooking surface. The robust cast iron grates are both elegant and resilient, designed for easy removal and convenient cleaning. With a continuous cooking surface and a flexible burner layout that includes automatic re-ignition, this cooktop is engineered to deliver both performance and safety, meeting the high standards of discerning cooks.

## FEATURES

- 5 gas burners with 1 dual-flame burner (Center)
- Polished Brass burners
- Automatic re-ignition system
- Heavy-duty continuous cast iron grates
- Elegant brushed stainless steel cooktop base
- Convertible to Liquid Propane

## INCLUDED ACCESSORIES

- |             |                   |
|-------------|-------------------|
| 41091256    | Installation Kit  |
| 49000100544 | LP Conversion Kit |

## OPTIONAL ACCESSORIES

- |       |              |
|-------|--------------|
| FMWOK | Wok Ring     |
| FMSIM | Simmer Plate |

† To achieve full ADA compliance, please consult the current ADA requirements for product installation instructions.


# 36" GAS COOKTOP



MODEL CODE

400 SERIES

**F4MTGK36S1**

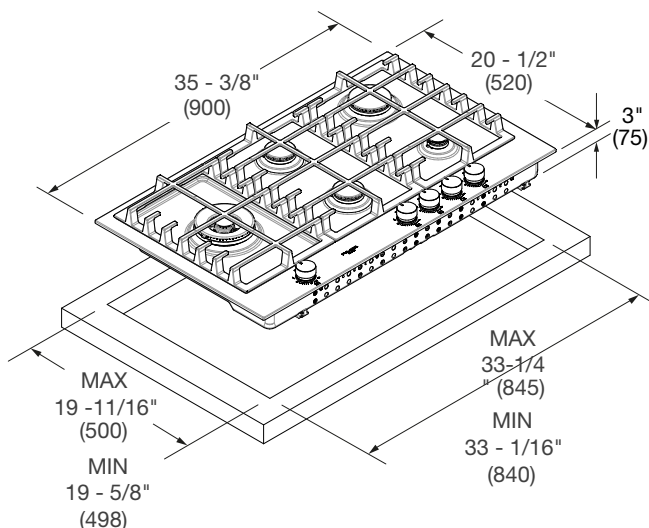

MODEL CODE	36" GAS COOKTOP F4MTGK36S1	
<b>GENERAL DETAILS</b>		
Finish	Brushed Stainless Steel	
Control Type	Knobs	
Fuel Type	Gas (NG or LP)	
Heavy-Duty Cast Iron Grates	3	
Cooking Zones	5	
Sealed Burners	Yes	
<b>DIMENSIONS / WEIGHT</b>		
Product Width, in. (mm)	35-3/8	(900)
Product Height, in. (mm)	5-1/4	(132)
Product Depth, in. (mm)	20-1/2	(520)
Cutout Width (min-max), in. (mm)	33-1/16 - 33-1/4	(840 - 845)
Cutout Height (min), in. (mm)	3-3/8	(86)
Cutout Depth (min-max), in. (mm)	19-5/8 - 19-11/16	(498 - 500)
Net Weight, lbs. (kg)	40	(18)
<b>POWER / RATINGS (120 V, 60 Hz)</b>		
Power (min-max) (Front-L)	1300 BTU/h (380 W) - 8000 BTU/h (2350 W)	
Power (min-max) (Rear-L)	1300 BTU/h (380 W) - 8000 BTU/h (2350 W)	
Power (min-max) (Center)	850 BTU/h (250 W) - 20000 BTU/h (5865 W)	
Power (min-max) (Front-R)	1000 BTU/h (295 W) - 4000 BTU/h (1175 W)	
Power (min-max) (Rear-R)	2200 BTU/h (645 W) - 12000 BTU/h (3520 W)	
<b>TECHNICAL DETAILS</b>		
Amperage Rating	0.1 A	
Maximum Power	52000 BTU/h (15295 W)	
Power Cable	3 Prong Nema 5 - 15P	
Power Cable Length, in. (mm)	51	(1300)
Electrical Circuit	120 V - 60 Hz - 15 A	
LP Kit Included	Yes	
<b>INSTRUCTIONS FOR USE</b>		
Use & Care Manual / Installation Manual	English / French / Spanish	
<b>WARRANTY</b>		
Limited Warranty	Parts and Labor (2-year)	