

GTW485ASJ


GE® Series 4.2 DOE cu. ft. stainless steel capacity washer

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

CIRCUIT REQUIREMENTS: An individual, properly-grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15 or 20 amp circuit breaker or a time-delay fuse, is required. Electrical Rating: 120V, 60Hz, 10A

NOTE: Washer wall outlet must be located within 36" of service code entry. Wall outlet must not be located behind dryer.

INSTALLATION INFORMATION: Before installing, consult installation instructions packed with product for current dimensional data.

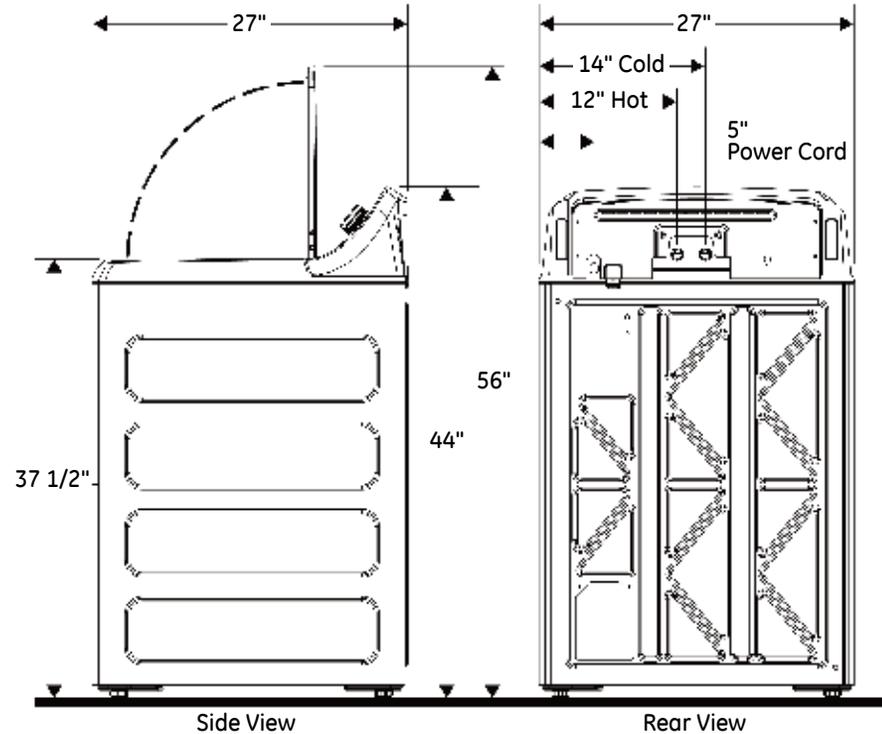

GE APPLIANCES

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at geappliances.com or call GE Answer Center® service, 800.626.2000.



Listed by
Underwriters
Laboratories

Specification Created 7/15

GTW485ASJ

GE® Series 4.2 DOE cu. ft. stainless steel capacity washer

FEATURES AND BENEFITS

ENERGY STAR® qualified – Meets or exceeds federal guidelines for energy efficiency for year-round energy and money savings

Deep Fill – Adds more water for larger loads


Deep Rinse – Removes any leftover soap residue

Auto Soak – Loosens stains by soaking up to 2 hours

Speed Wash – Delivers ready-to-go results within minutes

Stain PreTreat – Assists removing tough stains with preprogrammed settings that modify your cycle to treat the four most common stains

Model GTW485ASJWS – White with silver backsplash

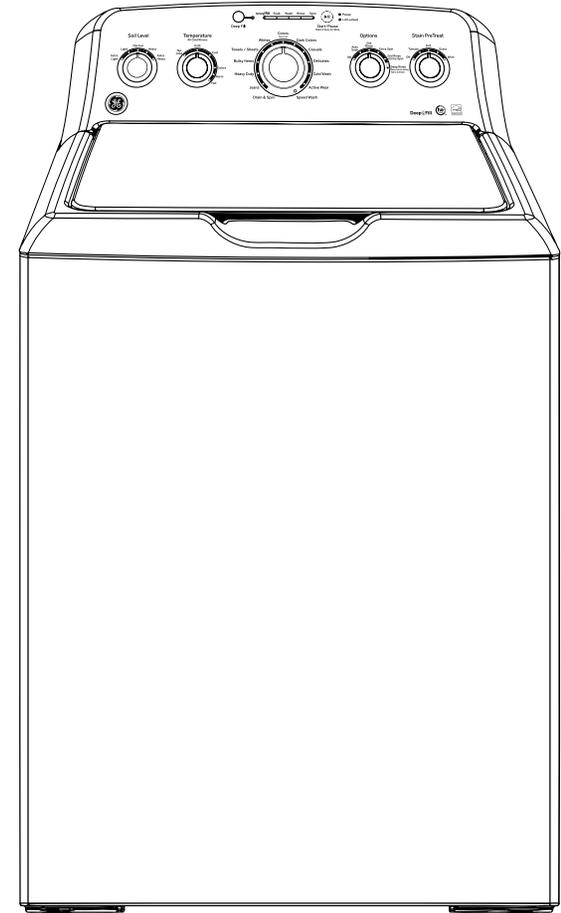

MODIFIED ENERGY FACTOR (IMEF)	2.06
WATER FACTOR (IWF)	4.3



GE APPLIANCES