

GTW490ACJ

GE® Series ENERGY STAR® 4.4 DOE Cu. Ft. Stainless Steel Capacity Washer


DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

CIRCUIT REQUIREMENTS: An individual, properly-grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15 or 20 amp circuit breaker or a time-delay fuse, is required.

ELECTRICAL RATING: 115V, 60Hz, 10A

Note: Washer wall outlet must be located within 36" of service code entry. Wall outlet must not be located behind dryer.

INSTALLATION INFORMATION: Before installing, consult installation instructions packed with product for current dimensional data.

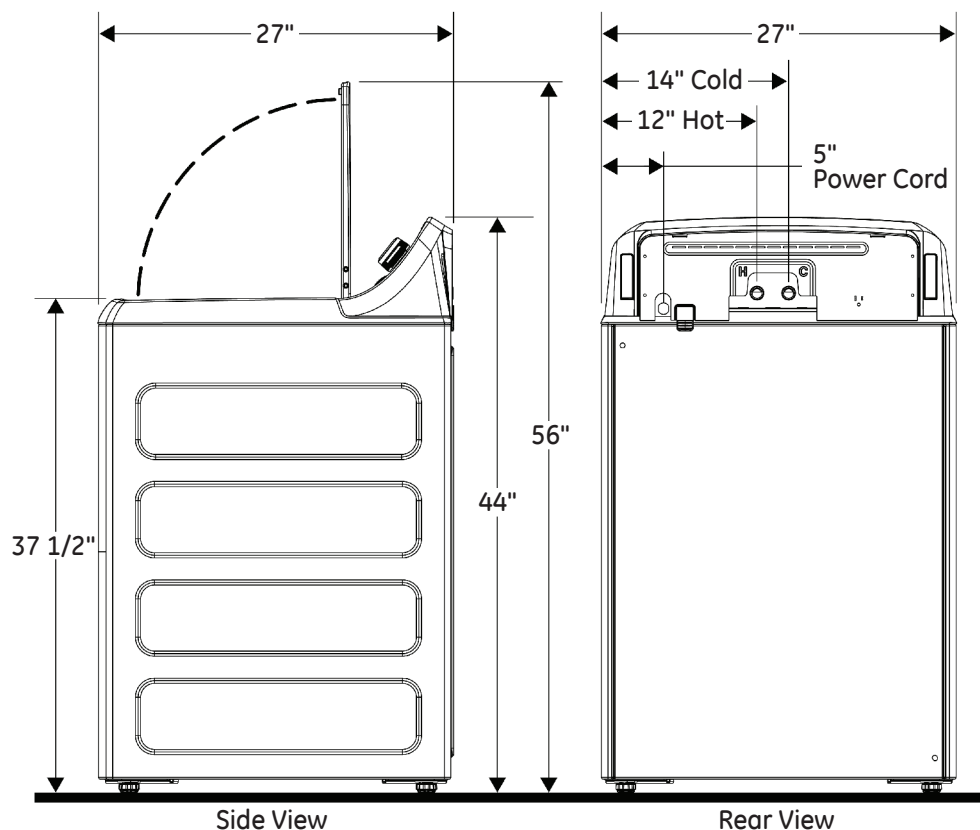

GE APPLIANCES

For answers to your Monogram®, GE Profile™ Series or GE® Series appliance questions, visit our website at geappliances.com or call GE Answer Center® service, 800.626.2000.



Listed by
Underwriters
Laboratories

Specification Created 7/15

GTW490ACJ

GE® Series ENERGY STAR® 4.4 DOE Cu. Ft. Stainless Steel Capacity Washer

FEATURES AND BENEFITS

Infusor wash system uses HE detergent, requiring less water than a traditional topload washer

Stain PreTreat – Assists removing tough stains with preprogrammed settings that modify your cycle to treat the four most common stains

PreciseFill – washer will automatically measure the load size and add just the right amount of water


Electronic controls with cycle status lights provide accurate cycle times

800-RPM spin speed – fast spin speeds remove water efficiently and minimize dry times

Bleach and fabric softener dispensers automatically operate with wash cycle

Model GTW490ACJWW – White

Model GTW490ACJWS – White with silver backsplash

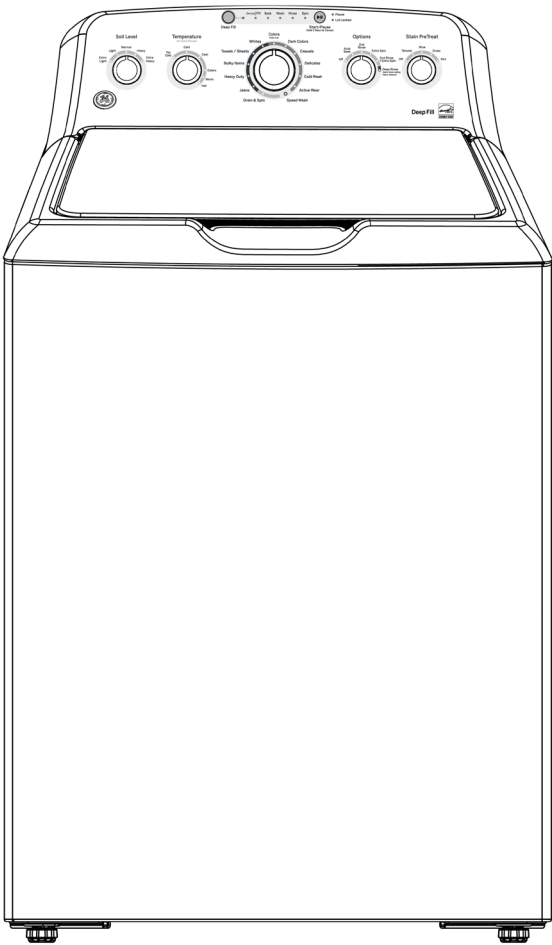

MODIFIED ENERGY FACTOR (IMEF)	2.07
WATER FACTOR (IWF)	4.1



GE APPLIANCES

