

HC 2062

Premium Plus NoFrost

36" Fully Integrated Refrigerator & Freezer

The **HC 2062** fully-integrated 36" wide refrigerator-freezer combination offers the ultimate in design flexibility with the ability to completely hide the appliance behind your kitchen cabinetry.

In the interior, GlassLine shelving offers plenty of storage space for all your food. On the inner door, gallon holders and additional storage racks offer space for beverages and sauces. The spacious vegetable drawers as well as the double freezer drawers are illuminated by numerous LED lights, for beautiful soft lighting as soon as you open the door. Liebherr's automatic IceMaker that is located in the top freezer drawer completes the outstanding




LED light column



Digital Display

Capacity	
Total	552 liters / 19.5 cu. ft.
Refrigerator Compartment	382 liters / 13.5 cu. ft.
Freezer Compartment	170 liters / 6.0 cu. ft.
Energy Star	Yes
Energy consumption per year	561 KWH/Y
Estimated yearly Energy Cost	\$67 USD *
Freezing capacity in 24 hours	10 KG / 22 lbs.
Climate rating	SN-T 10°C to 43°C(50°F to 110°F)
Power	115v at 60hz 2.5 amps / 300 watt
Shipping weight	178 kg /392 lbs.
Refrigerator Compartment	
Interior light	LED Side and Top
Forced air fan system	Quiet DC fan
Adjustable Glass Door shelves	4
Gallon storage door shelf	2
Glass Shelves Adjustable	2
Crisper Drawers	3 Clear Plastic
Freezer compartment	
Interior light	LED
Icemaker	Connected to home water supply
Ice cube production in 24 hr.	1.3 kg / 3 lbs.
Ice cube storage capacity	2.7 kg / 6 lbs.
*Your Energy Costs will depend on your utility rates and use. Estimated energy cost based on a national average electricity cost of 12 cents per KWh.	

THIS IS A QUICK REFERENCE GUIDE FOR HC 2062, FOR COMPLETE INSTRUCTIONS, PLEASE REFER TO THE DESIGN GUIDE OR VISIT <http://www.liebherr-appliances.com>

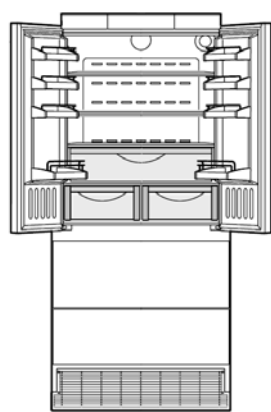

HC 2062
Energy Star:
Energy consumption p. a.:
Energy Supply:
Total capacity:
Refrigerator:
Freezer:
Ice cube capacity:
Ice cube stock:
Climate Rating:

qualified
452 kWh
115V / 60Hz / 2.5A
19.5 cu ft (552 L)
13.5 cu ft (382 L)
6 cu ft (170 L)
3 pd./24h
6 pd.
SN-T

- Automatic refrigerator defrosting
- Automatic freezer compartment defrosting
- Automatic IceMaker can be switched off
- Maximum door opening angle is 105°


Cabinet Opening Dimensions

	Cabinet Height C	Framed cabinet Depth B	Frameless cabinet Depth B
HC 2062	80"	24 3/4"	24"
	84"	24 3/4"	24"

A = 36" (914 mm)

IMPORTANT
Do not install the shut-off valve behind the appliance.

The position of the electrical outlet can be within the grey shaded areas or above the appliance.

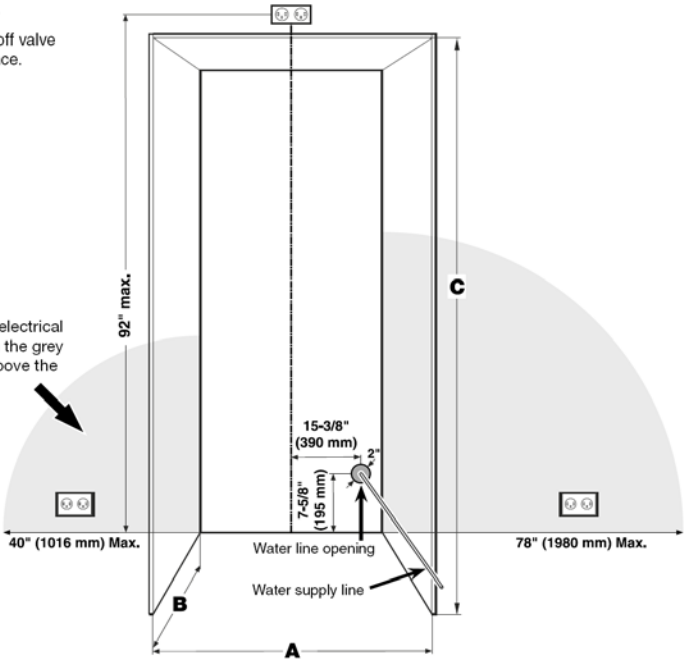

IMPORTANT


At 24" cabinets, the water line opening must be in the location as shown.

At cabinets deeper than 24" there is room to fit the pipe behind the appliance and the wall so there are no requirements for the water line lead out position.

IMPORTANT

The free length of the water supply line must be at least 31 - 1/2" (800 mm) when the tube comes out of the pre-scribed opening.

Unit Dimensions

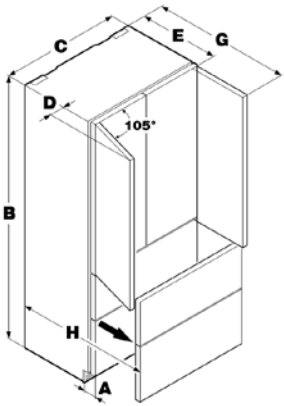

Overall height can be increased on HC 20 and HCS 20 units by 1-1/2" (40 mm) by adjusting the roller base.


HC 2062

- A. 3" (76 mm)
- B. 79-13/16" (2027 mm)
- C. 35-13/16" (910 mm)
- D. 3" (76 mm)
- E. 24" (610 mm)
- G. 42-7/16" (1078 mm)
- H. 37-1/8" (943 mm)

Please allow for door swing clearance at locations next to a wall.

The illustrated measurement for HC 2062 is without mounted front panels. Be sure to add your panel thickness and handle depth to this measurement in order to avoid interferences.

Ventilation Requirements

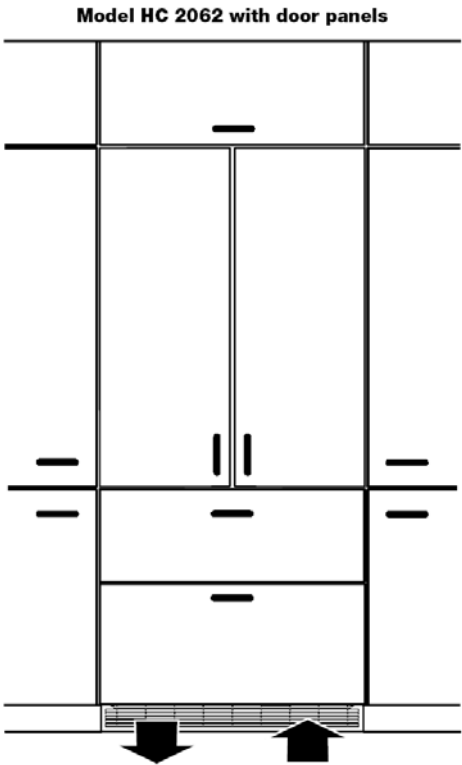

It is important to use the provided cover grille for the ventilation opening. This opening must not be covered with a cabinet base.