











White Solid

Integrated Solid

# **Key Features**

- Makes crescent shaped cubes approx.  $\frac{1}{2}$ " W x  $\frac{3}{4}$ " H x 2  $\frac{1}{4}$ " L
- Daily ice production is approximately 4 times greater than the average household refrigerator
- White interior
- Produces and stores up to 25 lb (11 Kg) of ice per day
- Stainless steel full-wrap door and handle (1/8" diameter)

- Stainless steel grille (stainless model), black metal grille (black, white, & integrated models)
- Field reversible door is shipped right-hand hinged
- Built-in or freestanding
- Four adjustable leveling legs
- No drain required

# **Model Details**


Model	Voltage/Hz	Door Swing	Finish	Shipping Weight
UHCR115-SS01B	115 / 60	Field Reversible	Stainless Solid	91 lb
UHCR115-IS01B	115 / 60	Field Reversible	Integrated Solid	87 lb
UHCR115-BS01B	115 / 60	Field Reversible	Black Solid	91 lb
UHCR115-WS01B	115 / 60	Field Reversible	White Solid	91 lb


# **Accessories**

Model	Description	Finish	Shipping Weight
ULAWATERHOOKUP	Braided Water Supply Line Kit	N/A	2 lb

# 14 <sup>15</sup>/<sub>16</sub>" (379 mm) 28" (711 mm) 34 ½" to 35 ½" (867 mm to 892 mm)

**Front** 

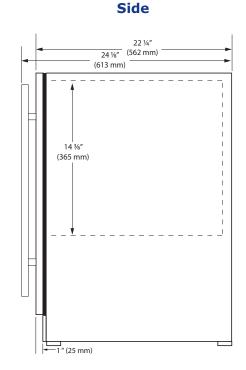


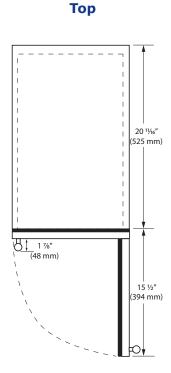


# **Specifications**

Model	HCR115
Amps: Running (115 v)	2.5 A
Capacity Ice	25 lb (11 Kg)
Defrost Type	Manual
Dimensions: Product Depth	22 <sup>1</sup> / <sub>4</sub> " / 562 mm
Dimensions: Product Height	34 ½" / 867 mm
Dimensions: Product Width	14 <sup>15</sup> / <sub>16</sub> " / 379 mm
ENERGY STAR	N/A
Energy Consumption: Avg. Per Year	N/A
Ice Production	25 lb (11 Kg)
Ice Type	Crescent Ice
Panel Height	30 <sup>1</sup> / <sub>4</sub> " / 768 mm
Panel Thickness	3/4" / 20 mm
Panel Type	Solid Panel
Panel Width	14 ¾" / 375 mm
Refrigerant Type	R600a

### **Back**



# **Cabinet Cut-Out**



## **Warranty**

- 1 Year (parts & labor) / 5 year sealed system (parts)
- + Additional 1 Year (parts & labor) warranty at no cost with product registration

See complete warranty for details



### **Installation Notes**

- 15" cutout width sufficient if door protrudes beyond adjacent cabinetry
- No additional clearance is needed for ventilation
- · Do not obstruct front grille air flow



