

Microwaves & Drawers

They impact designs. Not space.



With more options than ever, choose from speed ovens, drawer microwaves, over-the-range microwaves, warming drawers and storage drawers to match the sleek design of the Bosch kitchen.

Bosch speed ovens pair the precision of convection oven cooking with the speed of microwave technology. They can be combined with a warming drawer or a storage drawer to align horizontally with our single wall oven and are available in combination oven models. *Bosch speed ovens are available in 24", 27" or 30" widths.

Drawer microwave ovens open and close automatically with the push of a button, and are the perfect solution for under-counter installations.



*Horizontal installation of a 27" oven next to a 27" speed oven with warming drawer is possible, but the speed oven and warming drawer require either two cutouts or one cutout with a shelf support in between.

Benchmark® Microwaves

A recipe for flexibility.





Array of Installation Options

The Bosch speed oven and steam convection oven were designed for perfect horizontal alignment with the Bosch wall oven, when installed in conjunction with the storage and warming drawers. The Bosch speed oven and steam convection oven can also be installed vertically. Either installation can be flush inset or as an overlay, without the need for trim kits.



It's Faster, It's Better, It's a New Way of Cooking

The Bosch speed oven is an upgrade over the standard microwave oven. It offers fast and oven-quality cooking with European Convection, AutoChef®, Broil, and Microwave.

Benchmark® Speed Oven




**30" Benchmark®
Speed Oven
HMC80251UC**

- 1.6 cu. ft.
- European Convection, Broil, Microwave
- 9 AutoChef® Programs
- 240v, Direct Wire
- Faster Cooking Results


Benchmark®	
Stainless Steel – HMC80251UC	
General Properties	
Cavity material	Stainless steel
Max. microwave power (W)	1,000 W
Capacity	
Cavity capacity (cu. ft.)	1.6
Turntable diameter (in.)	14 1/8"
Technical Details	
Watts (W)	3,840 W
Circuit breaker (A)	20 A
Volts (V)	208 – 240 V
Frequency (Hz)	60 Hz
Power cord length (in)	48"
Plug type	Fixed connection
Dimensions & Weight	
Overall appliance dimensions (HxWxD) (in)	19 5/8" x 29 3/4" x 22 3/8"
Required cutout size (HxWxD) (in)	19 1/4" x 28 1/2" x 22"
Oven overall interior dimensions (HxWxD) (in.)	9 7/8" x 16 1/2" x 16 1/2"
Turntable – Metal Max. Cookware	12 3/4" dia.
Turntable – Ceramic Max. Cookware	12 1/2" dia.
Rack – Rectangular Cookware Max.	15" x 12"
Net weight (lbs)	92 lbs
Accessories – Included	
Included	Metal turntable, cooking rack, ceramic cooking tray

Benchmark® Speed Oven

Product Dimensions

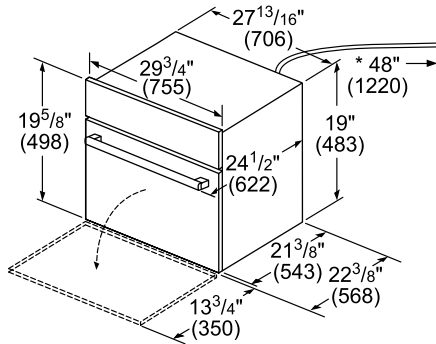


Wall Mounted Installation

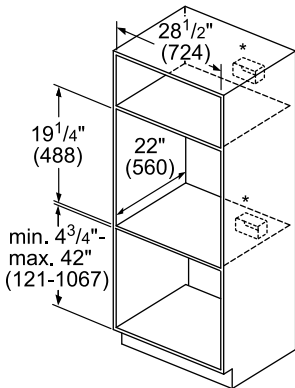

* Receptacle may be located above or beneath the unit within reach of the power cord.

measurements in inches (mm)

Under-Counter Installation

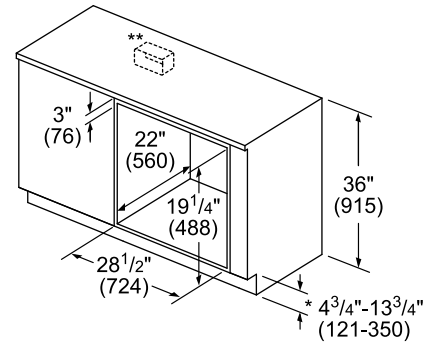

* Includes 3/4" (19) base plate



** Receptacle may be located to the left or right of the unit within reach of the power cord.

Example Flush Install



Single wall oven shown.

Flush Installation

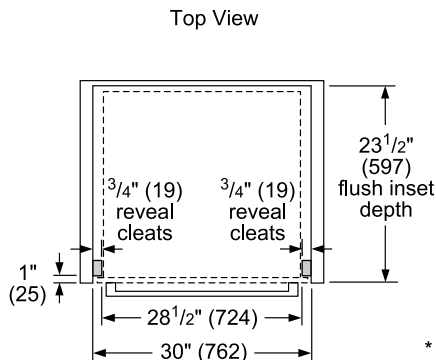

* Flush installation requires a 5/16" (8 mm) high x 28 1/2" (724 mm) wide x 22 1/2" (571 mm) deep baseplate underneath the unit body.

Measurements in inches (mm)

NOTE: Bosch speed ovens can be installed in combination with other Bosch cooking products. See pages 75-77 for details.

500 Series 24" Speed Oven



24" 500 Series
Speed Oven
HMC54151UC

- 1.6 cu. ft.
- SpeedChef cooking modes offer faster cooking times for your convenience
- Installs flush with kitchen cabinetry
- 2-in-1 microwave and convection oven for a variety of cooking options
- 120v, NEMA 5-20 – 3 Prong Plug


500 Series	
24" Stainless Steel – HMC54151UC	
General Properties	
Cavity material	Stainless steel
Max. microwave power (W)	1,000 W
Capacity	
Cavity capacity (cu. ft.)	1.6
Turntable diameter (in.)	14 3/16"
Technical Details	
Watts (W)	1,920 W
Circuit breaker (A)	20 A
Volts (V)	120 V
Frequency (Hz)	60 Hz
Power cord length (in)	48"
Plug type	NEMA 5-20 – 3 prong plug
Dimensions & Weight	
Overall appliance dimensions (HxWxD) (in)	17 7/8" x 23 7/16" x 22 1/16"
Required cutout size (HxWxD) (in)	(Standard) 17 3/4" x 22 5/16" x 22" (Flush) 18 7/16" x 24" x 22 3/4"
Oven overall interior dimensions (HxWxD) (in.)	9 7/8" x 16 1/2" x 16 1/2"
Turntable – Metal Max. Cookware	12 3/4" dia.
Turntable – Ceramic Max. Cookware	12 1/2" dia.
Rack – Rectangular Cookware Max.	15" x 12"
Net weight (lbs)	83 lbs
Accessories – Included	
Included	Metal turntable, cooking rack, ceramic cooking tray




NEMA 5-20 Receptacle

500 Series 24" Speed Oven

Product Dimensions

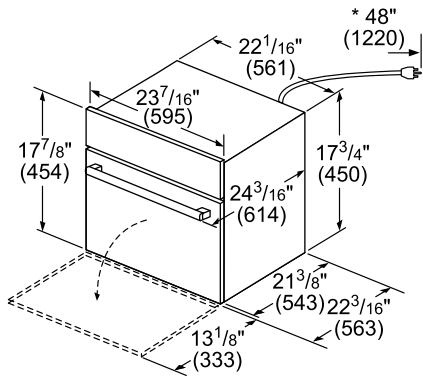


Flush Installation

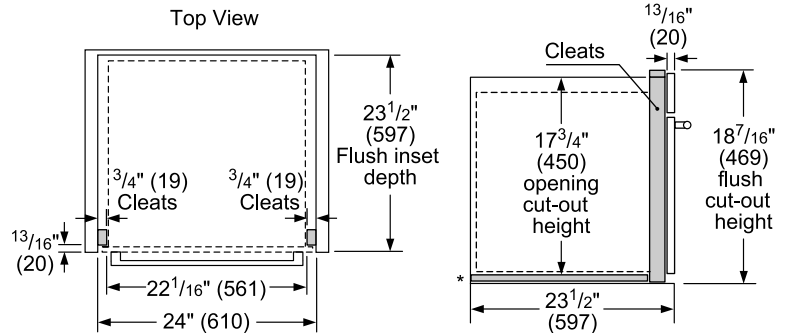

* Baseplate $\frac{5}{16}$ " (8)

Under-Counter Installation

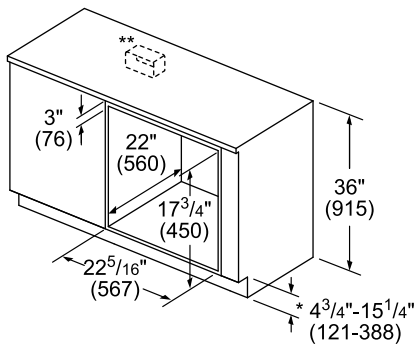

* Includes $\frac{3}{4}$ " (19) base plate


** Receptacle may be located to the left or right of the unit within reach of the power cord.

Example Flush Install



Single wall oven shown.

Wall Mounted Installation

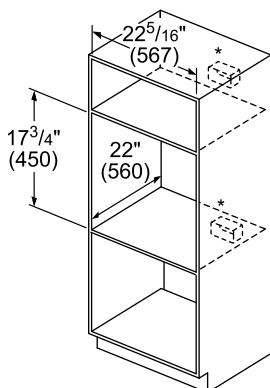

* Receptacle may be located above or beneath the unit within reach of the power cord.

Notice:

The cabinet base must be flat and capable of supporting a weight of at least 142 lbs (64.1 kg).

IMPORTANT: Bosch 24" Speed Oven is not approved to be installed under a cooktop.

800 Series Speed Ovens



30" HMC80151UC



27" HMC87151UC

800 Series Speed Ovens


- 1.6 cu. ft.
- European Convection, Broil, Microwave
- 9 AutoChef® Programs
- 120v, NEMA 5-20 – 3 Prong Plug

800 Series	
30" Stainless Steel – HMC80151UC	
27" Stainless Steel – HMC87151UC	
General Properties	
Cavity material	Stainless steel
Max. microwave power (W)	1,000 W
Capacity	
Cavity capacity (cu. ft.)	1.6
Turntable diameter (in.)	14 1/8"
Technical Details	
Watts (W)	1,920 W
Circuit breaker (A)	20 A
Volts (V)	120 V
Frequency (Hz)	60 Hz
Power cord length (in)	43"
Plug type	NEMA 5-20 – 3 prong plug
Dimensions & Weight	
Overall appliance dimensions (HxWxD) (in)	30": 19 5/8" x 29 3/4" x 22 3/8" 27": 19 5/8" x 26 3/4" x 22 3/8"
Required cutout size (HxWxD) (in)	30": 19 1/4" x 28 1/2" x 22" 27": 19 1/4" x 25 1/2" x 22"
Oven overall interior dimensions (HxWxD) (in.)	9 7/8" x 16 1/2" x 16 1/2"
Turntable – Metal Max. Cookware	12 3/4" dia.
Turntable – Ceramic Max. Cookware	12 1/2" dia.
Rack – Rectangular Cookware Max.	15" x 12"
Net weight (lbs)	30": 92 lbs; 27": 87 lbs
Accessories – Included	
Included	Metal turntable, cooking rack, ceramic cooking tray


NOTE: Bosch Speed ovens can be installed in combination with other Bosch cooking products. See pages 80–81 for details. Horizontal installation of a 27" oven next to a 27" speed oven with warming drawer is possible, but the speed oven and warming drawer require either two cutouts or one cutout with a shelf support in between.




30" Flush Installation

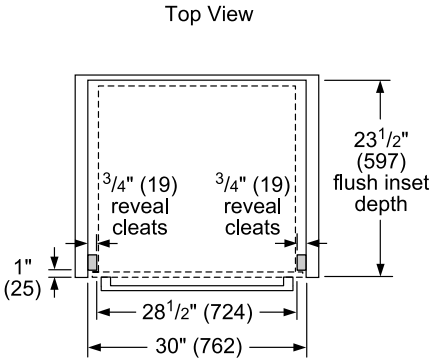

27" Flush Installation

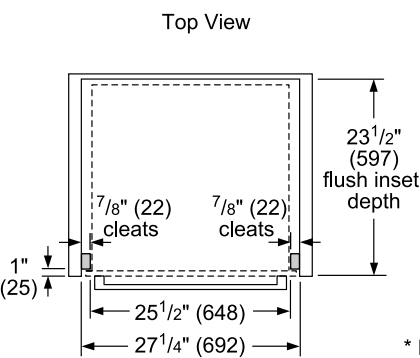

30" & 27" Flush Installation




* Flush installation requires a 5/16" (8 mm) high x 28 1/2" (724 mm) wide x 22 1/2" (571 mm) deep baseplate underneath the unit body.


Measurements in inches (mm)

800 Series Speed Ovens


30" Speed Oven Dimensions

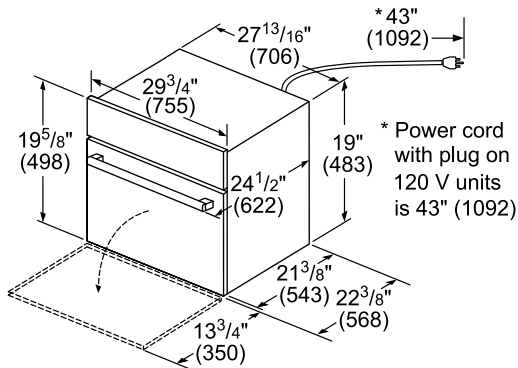

27" Speed Oven Dimensions

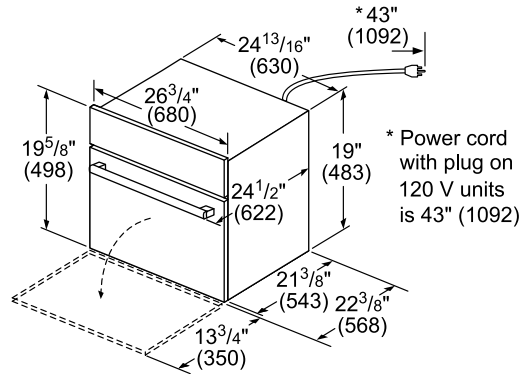


30" Speed Oven Under-Counter

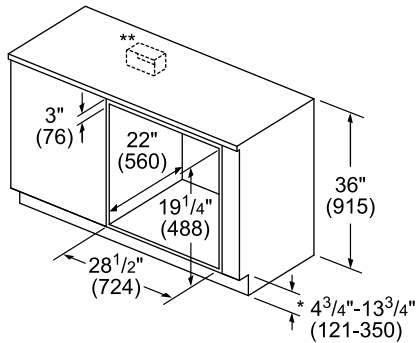

* Includes $\frac{3}{4}$ " (19) base plate

** Receptacle may be located to the left or right of the unit within reach of the power cord.

27" Speed Oven Under-Counter

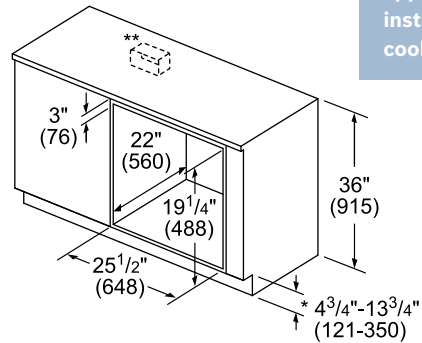


* Includes $\frac{3}{4}$ " (19) base plate

** Receptacle may be located to the left or right of the unit within reach of the power cord.


IMPORTANT: Bosch Speed Oven is not approved to be installed under a cooktop.

30" Speed Oven Wall-Mounted

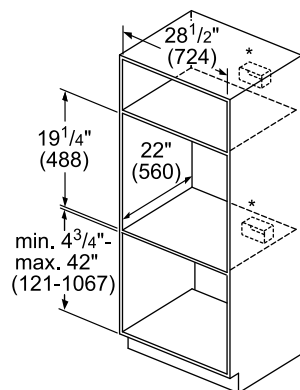

* Receptacle may be located above or beneath the unit within reach of the power cord.

27" Speed Oven Wall-Mounted

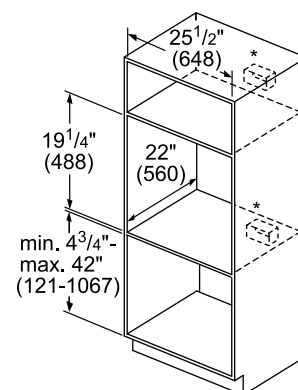

* Receptacle may be located above or beneath the unit within reach of the power cord.

Measurements in inches (mm)

500 Series Storage and Warming Drawers



30" 500 Series Storage Drawer
HSD5051UC

- 2.4 cu. ft.
- Store Oven Mitts, Meat Probe, Oven Racks and other Relevant Cooking Tools
- Installs in One Cut Out Under Steam Convection & Speed Oven via Included Installation Brackets



500 Series Warming Drawer
30" – HWD5051UC
27" – HWD5751UC

- 2.2 cu. ft. (27" is 1.9 cu. ft.)
- + Warming Drawer
- + 4 Settings, Timer
- Installs in One Cut Out Under Steam Convection & Speed Oven via Included Installation Brackets (30" only)


+ Indicates a step-up feature

	Storage Drawer	Warming Drawers
	30" Stainless Steel – HSD5051UC	30" Stainless Steel – HWD5051UC 27" Stainless Steel – HWD5751UC
General Properties		
Power levels	N/A	High, low, medium
Dough proofing mode	N/A	Yes
Temperature range	N/A	100° – 190° F
Timer 5 min. – 5 hours	N/A	Yes
Automatic shut off after 1 hour	N/A	Yes
Door opening	Push to Open	Push to Open
Hinges	Ball bearing hinges	Ball bearing hinges
Wattage heating element	N/A	450 W
Control type	N/A	Illuminated TouchControl
Capacity		
Cavity capacity (cu. ft.)	2.4 cu. ft.	30": 2.2 cu. ft. 27": 1.9 cu. ft.
Technical Details		
Watts (W)	N/A	450 W
Circuit breaker (A)	N/A	15 A
Volts (V)	N/A	120 V
Frequency (Hz)	N/A	60 Hz
Power cord length (in)	N/A	84"
Plug type	N/A	120V – 3 prong
Dimensions & Weight		
Overall appliance dimensions (HxWxD) (in)	9 7/16" x 29 3/4" x 23 1/2"	30": 9 7/16" x 29 3/4" x 23 1/2" 27": 9 7/16" x 26 3/4" x 23 1/2"
Required cutout size (HxWxD) (in)	9 1/4" x 28 1/2" x 23 1/2"	30": 9 1/4" x 28 1/2" x 23 1/2" 27": 9 1/4" x 25 1/2" x 23 1/2"
Net weight (lbs)	47 lbs	30": 55 lbs 27": 50 lbs
Accessories – Included		
Installation brackets	Installation brackets*	Installation brackets for 30" model*
Drawer mat	Rubber mat to protect bottom of drawer	N/A

*To install drawer below speed or steam oven in one cut out (identical to single wall oven cut out)


500 Series Storage and Warming Drawers

30" Storage / Warming Drawer Dimensions

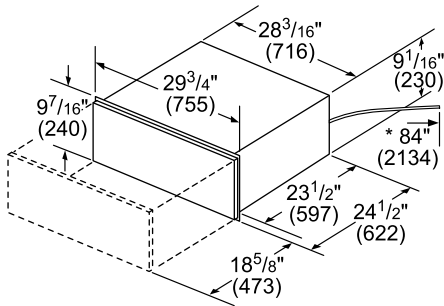


* Power cord on warming drawer is 84" (2134 mm)

27" Warming Drawer Dimensions

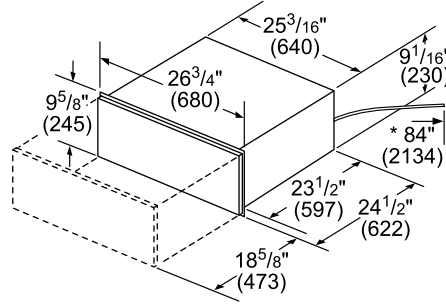


* Power cord on warming drawer is 84" (2134 mm)

30" Storage / Warming Drawer Wall-Mounted

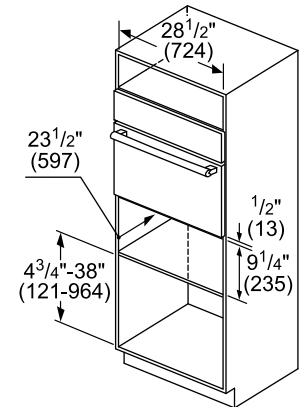


measurements in inches (mm)

27" Warming Drawer Wall-Mounted

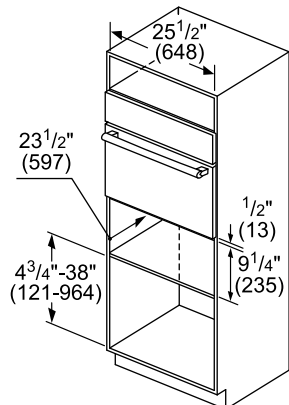


measurements in inches (mm)

30" Speed Oven Over Storage / Warming Drawer

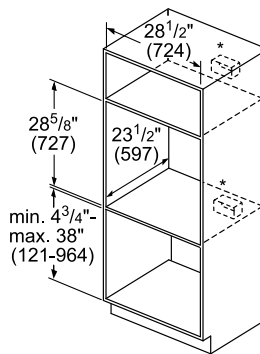

* For installation into a wall cabinet, the receptacle may be installed above, below, or to the left or right of the unit within range of the power cord.


Speed Oven Over Storage / Warming Drawer

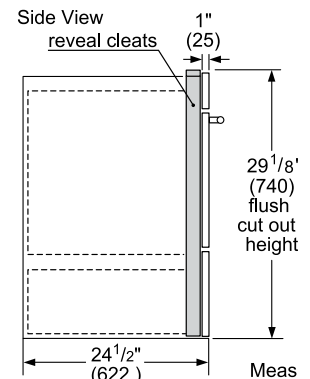

Measurements in inches (mm)


30" Flush Installation

Top View

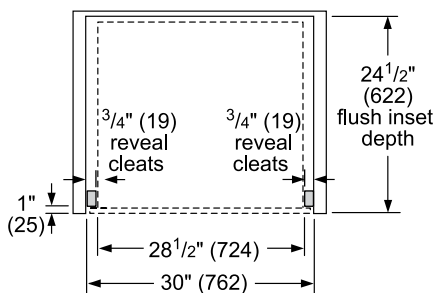


27" Flush Installation

Top View

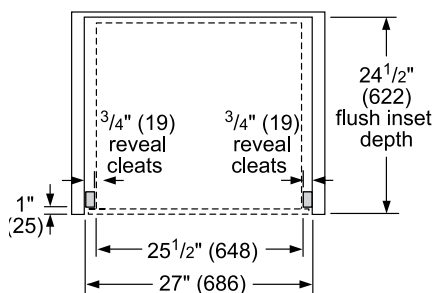

30" & 27" Flush Installation

Side View



NOTE: See pages 80–83 for planning and installation details when installing Bosch storage and warming drawers in combination with other Bosch products. Horizontal installation of a 27" oven next to a 27" speed oven with warming drawer is possible, but the speed oven and warming drawer require either two cutouts or one cutout with a shelf support in between.

Benchmark® Over-the-Range Microwave




**30" Benchmark®
Over-the-Range Microwave
HMVP052U**

- 1.8 cu. ft.
- Triple Distribution System for More Even Cooking
- 1500 Watts Convection Cooking
- Stainless Steel Cavity

30" Benchmark®	
Stainless Steel – HMVP052U	
General Properties	
Cavity material	Stainless steel
Max. microwave power (W)	1,000 W
Max. extraction rate (CFM)	385 CFM
Ducted	Yes
Ductless	Yes
Duct size	3 1/4" x 10"
Capacity	
Cavity capacity (cu. ft.)	1.8 cu. ft.
Turntable diameter (in.)	14 3/16"
Technical Details	
Watts (W)	1,450 W
Circuit breaker (A)	15 A
Volts (V)	120 V
Frequency (Hz)	60 Hz
Power cord length (in)	39"
Plug type	120V–3 prong
Dimensions & Weight	
Overall appliance dimensions (HxWxD) (in)	17 1/2" x 29 7/8" x 15 7/8"
Required cutout size (HxWxD) (in)	16 1/2" Min x 30" x 12" Min – 14" Max
Net weight (lbs)	54 lbs
Accessories – Included	
Included	Two level cooking rack


Benchmark® Over-the-Range Microwave

Product Dimensions

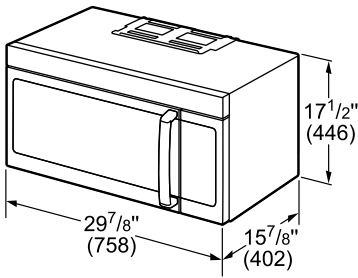


measurements in inches (mm)


Venting Options



ROOF VENTING




WALL VENTING




ROOM VENTING

Electrical Connection

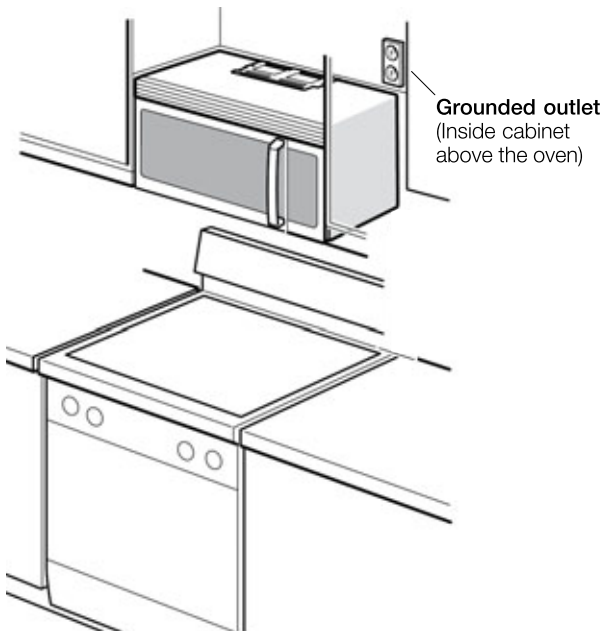

Clearance Above Cooktop

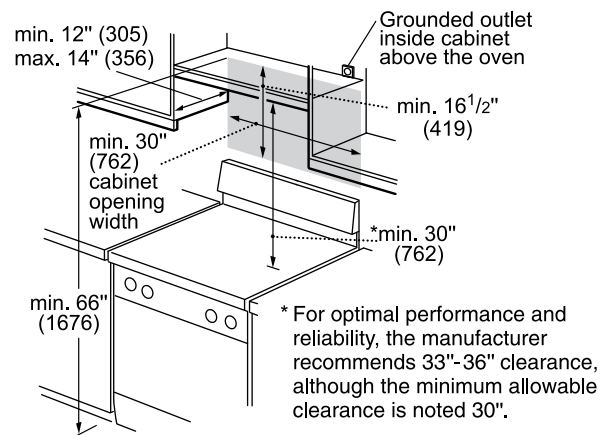

measurements in inches (mm)

300 / 500 / 800 Series Over-the-Range Microwaves



300 Series
Over-the-Range Microwave
HMV3053U

- 1.6 cu. ft.
- 1000 Watts
- Auto Cook Functions
- 300 CFM



500 Series
Over-the-Range Microwave
HMV5053U

- + 2.1 cu. ft.
- + 1100 Watts
- + Sensor Cooking
- + 385 CFM



800 Series
Over-the-Range Microwave
HMV8053U


- 1.8 cu. ft.
- 1000 Watts
- + 1500 Watts Convection Cooking
- + Stainless Steel Cavity

+ Indicates a step-up feature

	30" – 300 Series	30" – 500 Series	30" – 800 Series
	Stainless Steel – HMV3053U	Stainless Steel – HMV5053U	Stainless Steel – HMV8053U
General Properties			
Cavity color	White	White	Stainless steel
Max. microwave power (W)	1,000 W	1,100 W	1,000 W
Max. extraction rate (CFM)	300 CFM	385 CFM	385 CFM
Ducted	Yes	Yes	Yes
Ductless	Yes	Yes	Yes
Duct size	3 1/4" x 10"	3 1/4" x 10"	3 1/4" x 10"
Capacity			
Cavity capacity (cu. ft.)	1.6 cu. ft.	2.1 cu. ft.	1.8 cu. ft.
Turntable diameter (in.)	13 5/8"	14 3/16"	14 3/16"
Technical Details			
Watts (W)	1,550 W	1,550 W	1,450 W
Circuit breaker (A)	15 A	15 A	15 A
Volts (V)	120 V	120 V	120 V
Frequency (Hz)	60 Hz	60 Hz	60 Hz
Power cord length (in)	39"	39"	39"
Plug type	120V–3 prong	120V–3 prong	120V–3 prong
Dimensions & Weight			
Overall appliance dimensions (HxWxD) (in)	16 1/2" x 29 7/8" x 15 3/8"	17 1/2" x 29 7/8" x 15 7/8"	17 1/2" x 29 7/8" x 15 7/8"
Required cutout size (HxWxD) (in)	16 1/2" Min x 30" x 12" Min – 12 7/8" Max	16 1/2" Min x 30" x 12" Min – 14" Max	16 1/2" Min x 30" x 12" Min – 14" Max
Net weight (lbs)	54 lbs	54 lbs	54 lbs
Accessories – Included			
Included	N/A	N/A	Two level cooking rack


300 / 500 / 800 Series Over-the-Range Microwaves

300 Series Product Dimensions

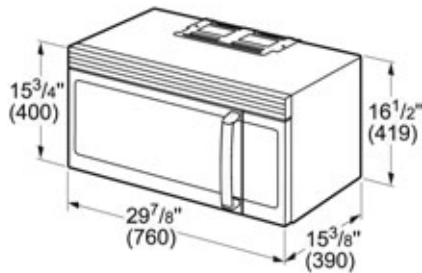


Measurements in inches
(mm) in brackets

500 / 800 Series Product Dimensions

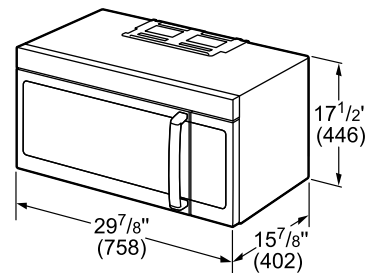


measurements in inches (mm)


300 / 500 / 800 Series Electrical Connection

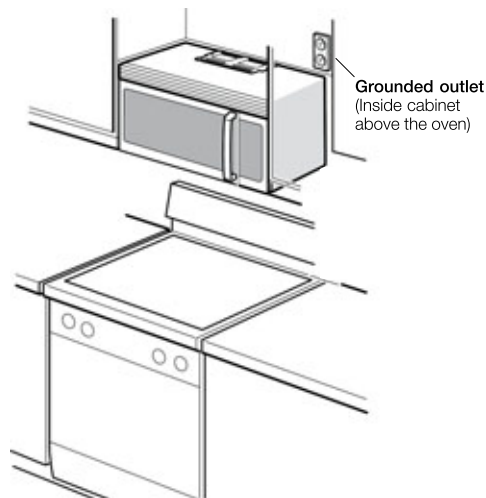


300 / 500 / 800 Series Venting Options

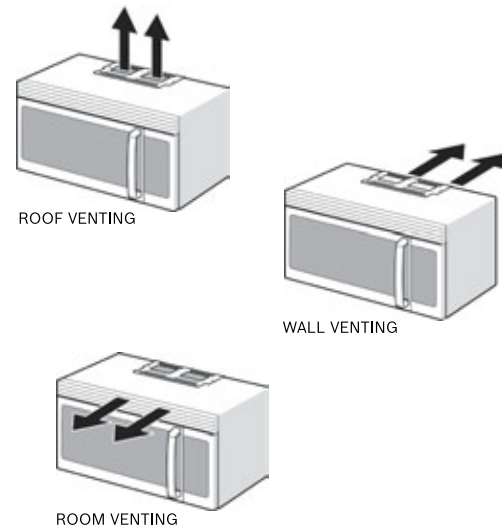

300 Series Clearance Above Cooktop

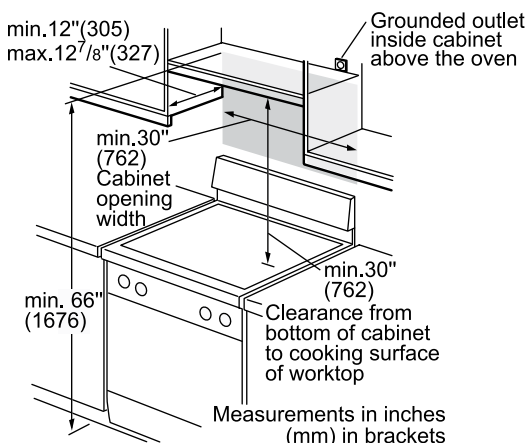

500 / 800 Series Clearance Above Cooktop

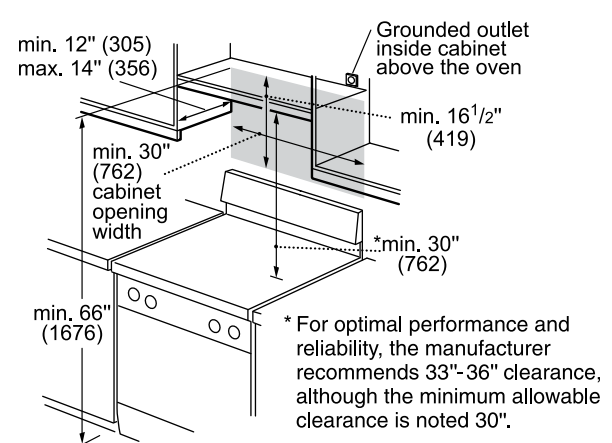

* For optimal performance and reliability, the manufacturer recommends 33"-36" clearance, although the minimum allowable clearance is noted 30".

measurements in inches (mm)

800 Series Drawer Microwaves



**24" 800 Series
Drawer Microwave
HMD8451UC**

- 1.2 cu. ft.
- 950 W Watts
- 10 Power Levels
- Flush Installation



**30" 800 Series
Drawer Microwave
HMD8053UC**

- 1.2 cu. ft.
- 950 W Watts
- 10 Power Levels
- Flush Installation


The Flush-Mount Drawer Microwave

Open your design options. The Bosch drawer microwave installs cleanly under counters, cooktops, and flush to cabinets, letting you take advantage of extra space in a kitchen island, for example. The drawer microwave opens and closes with a push of a button and is large enough to fit a 9" x 13" baking oven pan or a 4 qt. casserole dish.


	24" – 800 Series	30" – 800 Series
	Stainless Steel – HMD8451UC	Stainless Steel – HMD8053UC
General Properties		
Cavity material	White	White
Max. microwave power (W)	950 W	950 W
Capacity		
Cavity capacity (cu. ft.)	1.2 cu. ft.	1.2 cu. ft.
Technical Details		
Watts (W)	1,500 W	1,500 W
Circuit breaker (A)	15 A	15 A
Volts (V)	120 V	120 V
Frequency (Hz)	60 Hz	60 Hz
Power cord length (in)	48"	48"
Plug type	120V–3 prong	120V–3 prong
Dimensions & Weight		
Overall appliance dimensions (HxWxD) (in)	16 5/16" x 23 7/8" x 23 3/8"	16 5/16" x 30" x 23 3/8"
Required cutout size (HxWxD) (in)	14 13/16" x 22 1/8" x 23 1/2"	14 13/16" x 28 1/4" x 23 1/2"
Net weight (lbs)	81 lbs	82 lbs

800 Series Drawer Microwaves


24" Drawer Microwave Dimensions

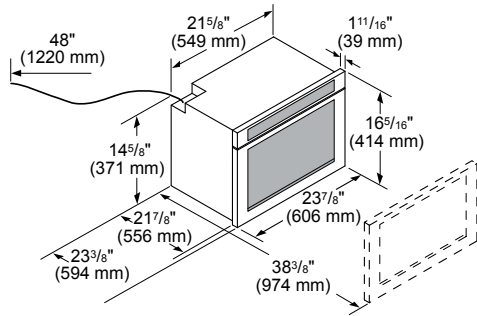


30" Drawer Microwave Dimensions

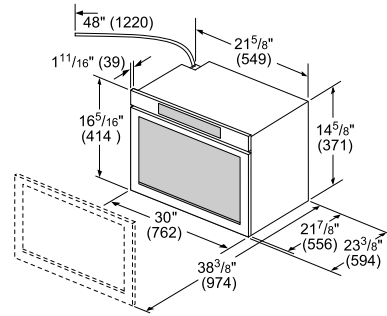


24" Drawer Microwave Standard Installation

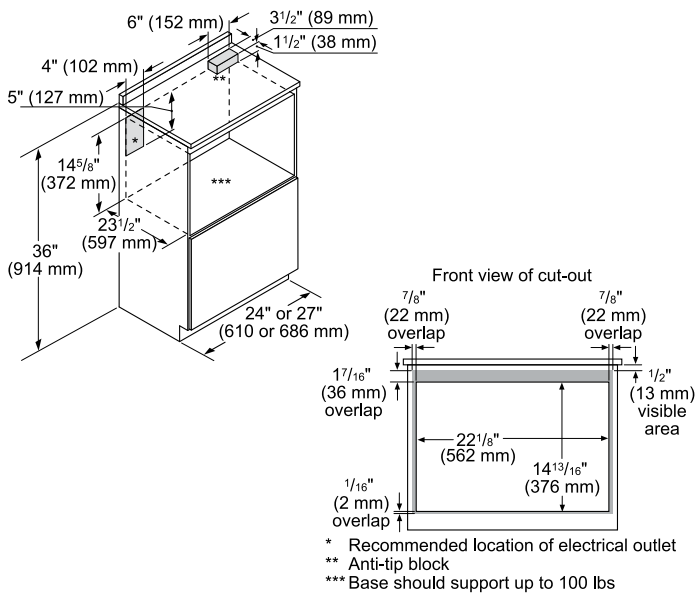


30" Drawer Microwave Standard Installation

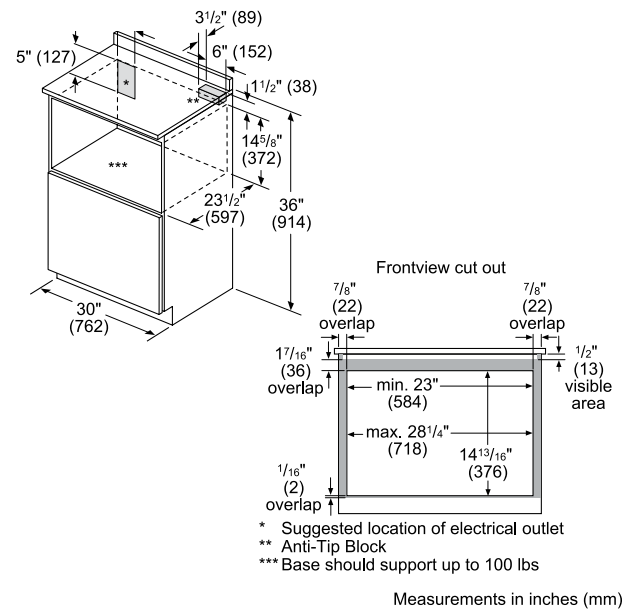

24" Drawer Microwave Flush Installation

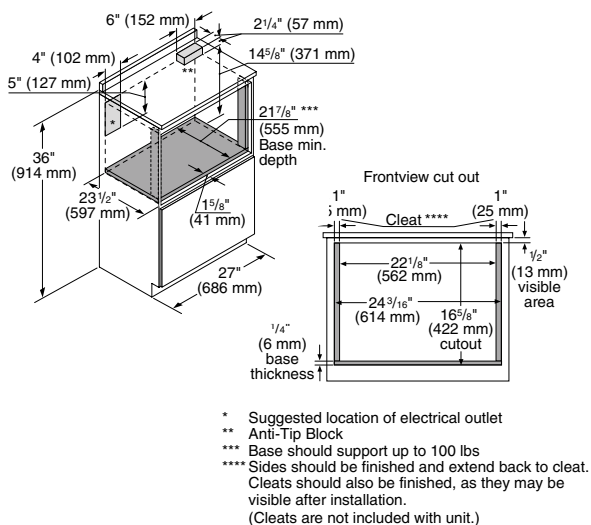

30" Drawer Microwave Flush Installation

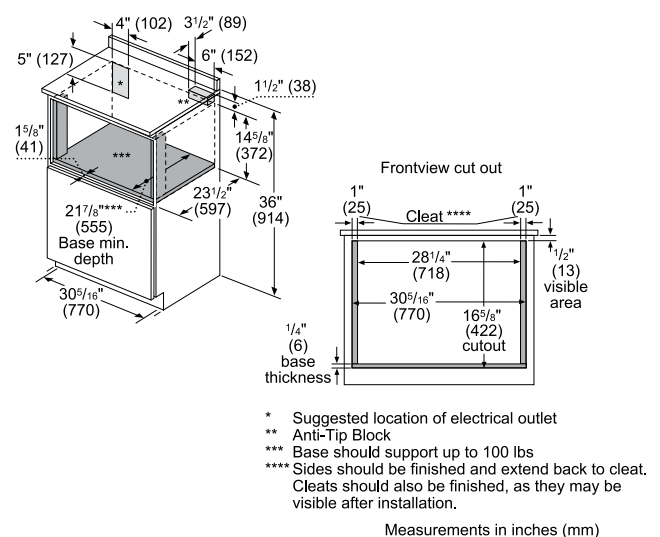

500 Series Built-in Microwave



- 500 Series**
Built-in Microwave
HMB5051 (Stainless Steel)
HMB5061 (Black)
- 2.1 cu. ft.
 - 1,200 Watts
 - Automatic Sensor Programs
 - 27" and 30" Trim Kits Available

500 Series	
Stainless Steel – HMB5051	
Black – HMB5061	
General Properties	
Cavity color	White
Max. microwave power (W)	1,200 W
Capacity	
Cavity capacity (cu. ft.)	2.1 cu. ft.
Turntable diameter (in.)	16 1/2"
Technical Details	
Watts (W)	1,460 W
Circuit breaker (A)	20 A
Volts (V)	120 V
Frequency (Hz)	60 Hz
Power cord length (in)	41 5/16"
Plug type	120V–3 prong
Dimensions & Weight	
Overall appliance dimensions (HxWxD) (in)	14" x 23 7/8" x 19 7/16"
Required cutout size (HxWxD) (in)	19 7/8" x 25 7/16" – 28 7/16" x 21"
Net weight (lbs)	34 lbs
Accessories – Included	
Included	Glass turntable

Optional Accessories



HMT5751
27" Stainless Steel
Trim Kit




HMT5051
30" Stainless Steel
Trim Kit




HMT5061
30" Black Trim Kit

500 Series Built-in Microwave

Built-in Microwave Dimensions

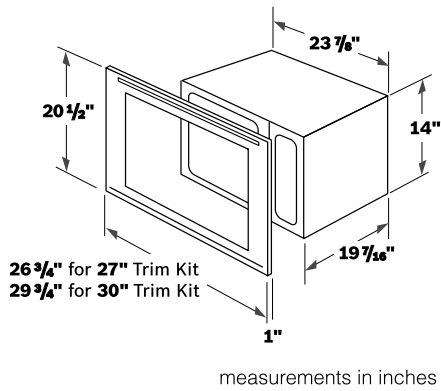

Built-in Microwave Installation

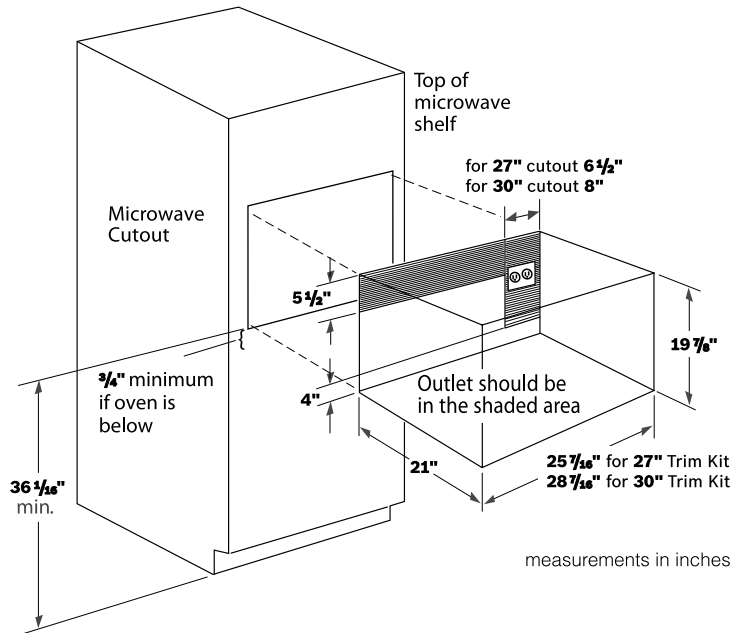

Built-in Microwave Installation with 30" Trim Kit Over Single Oven

