

36" Pull-Out Hood, 500 CFM, HUI56551UC, Stainless Steel



Features and Benefits

Design

- The Pull-Out Hood Visor Fully Extends During Use, and Neatly Tucks Away When not Needed
- Front Stainless Steel Visor Panel can be Replaced with the User's Own Custom Strip to Match Surrounding Cabinetry (Custom Strip Not Provided)

Performance

- 500 CFM Integrated Blower Included
- Three Speed Slider Control
- 2 Halogen Lights - 120 V, 20 Watt Max., G-4 Base
- 6 inch Round Duct At Discharge

Efficiency

- Absorbs odors with charcoal replacement filters (Separate Purchase Required)

Convenience

- Aluminum Mesh Filters are dishwasher safe for ease of cleaning
- Converts to Recirculation Mode with Accessory Kit (Separate Purchase Required)
- For areas with Make-Up Air Requirements, our CFM Reducer Kit reduces the CFM to under 300 (Separate Purchase Required)


Notes: All height, width and depth dimensions are shown in inches. *Please refer to installation instructions prior to making cutout. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details. Applicable product warranty can be found in a accompanying product literature or you may contact your account manager for further details.

For more information on our entire line of products, go to boschappliances.com or call 1-800-944-2904.


Copyright ©2020 BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

Litho Date: 10/2020


36" Pull-Out Hood, 500 CFM, HUI5651UC, Stainless Steel




measurements in inches (mm)

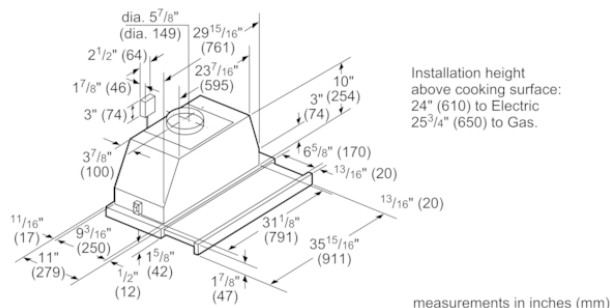

measurements in inches (mm)



measurements in inches (mm)



measurements in inches (mm)

Features

Operating Mode	Convertible: Ducted / Recirculating
Number of speed settings	3-stage
Delay Shut off modes	
Silence level (dBA)	
Required accessories	
Optional accessories	HUIF06UC, HUIRED56UC
Number of lights	2
Type of lamps used	Halogen
Total power of the lamps (W)	
Grease filter material	
Grease filter type	
Clean filter reminders	

Technical Specification

UPC code	825225920533
Material	Stainless steel
Watts (W)	370
Current (A)	15
Volts (V)	120
Frequency (Hz)	60
Approval certificates	
Power Cord Length	50"
Plug type	fixed connection
Overall appliance dimensions (HxWxD) (in)	/ x 35 7/8" x
Product packaging dimensions (HxWxD) (in)	16.92 x 40.55 x 18.11
Height of the chimney (in)	
Vertical rise height	
Required distance above cooktop/ranges	
Net weight (lbs)	37.000
Gross weight (lbs)	42.000
Adjustable feet	
Motor location	Integrated motor in hood body
Maximum CFM	
Diameter of air duct (in) top	6
Diameter of air duct (in) back	6
Discharge direction	vertical
No-return airflow flap	No

Notes: All height, width and depth dimensions are shown in inches. *Please refer to installation instructions prior to making cutout. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details. Applicable product warranty can be found in a accompanying product literature or you may contact your account manager for further details.

For more information on our entire line of products, go to boschappliances.com or call 1-800-944-2904.

Copyright ©2020 BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

Litho Date: 10/2020