


## **SPECIFICATION SHEET**

# ECLISSE ISLAND IC34E SERIES RANGE HOOD



The common made uncommon. Eclisse Island can be a powerful statement from one angle, but nearly disappear from another. This is a unique "brick" design that makes it most attractive and exclusive.

## **FEATURES**


- Italian design
- Wall mount
- Finishes: 430 Stainless Steel, #4 Brushed
- Width: Width: 39-3/8-in. Depth: 27-5/8-in.
- Telescopic flue accommodates 8' to 9' ceilings
- 8" round duct connector/backdraft damper
- 1-level LED lighting (4 LED modules, 6 Watts each)
- Four-speed electronic pushbutton control with LED indicator
- Use with exterior-mounted or inline remote blowers for different levels of exhaust capacity (see specifications blower purchased separately)
- Heat Sentry<sup>™</sup> automatically turns blower to high speed when excess cooking heat is detected
- Delay timer control automatically shuts off range hood after 10 minutes
- Special control indicates when it's time to clean the filter
- Dishwasher-safe filter features a quick-release latch
- For indoor use only

#### **OPTIONS**

- 8-in. to 10-in. transition (Model 414)
- Flue extension for 10-ft. to 11-ft. ceilings (Model AEIC34SB), stainless steel
- Remote control (Model ACR2)

## **SPECIFICATIONS**

		OPTIONAL ER MODELS	BLOWER CFM	VOLTS	AMPS	DUCT		
E	EB6		600 max.					
E	EB9	wall or roof mount	900 max.	120	0.60 (lights only) + 6.0 max. (blower only)			
E	EB12	exterior blowers	1200 max.			8-in. round at		
E	EB15		1500 max.			the hood.		
I	LB3		280 max.			See blower specs for duct requirements.		
1	LB6	inline	600 max.					
1	LB9	blowers	800 max.					
ı	LB11		1100 max.					




BEST Hartford, Wisconsin www.BestRangeHoods.com 800-558-1711 BEST Drummondville, QC, Canada www.BestRangeHoods.com 866-737-7770


REFERENCE	QTY.	REMARKS	Project				
			Location				
			Architect				
			Engineer				
			Contractor				
			Submitted by Date				

31M 99045183A

## **IC34E SERIES WIRING**



# **IC34E SERIES MOUNTING**

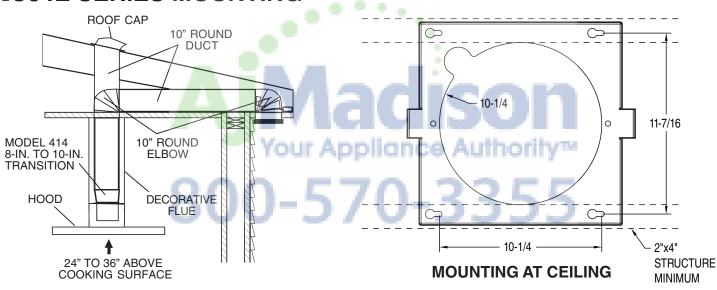

CEILING	DUCT METHOD	HOOD DISTANCE ABOVE 36" HIGH COOK TOP (see notes below)												
HEIGHT		24"	25"	26"	27"	28"	29"	30"	31"	32"	33"	34"	35"	36"
8 FEET	Ducted	х	Х	Х	Х									
9 FEET	Ducted		X*	X*	X*	X*	Х	Х	Х	Х	Х	Х	Х	Х
10 FEET (see note b.)	Ducted	Х	Х	Х	Х	Х	х	Х	х	Х	Х	Х	Х	х
11 FEET (see note b.)	Ducted									Х	Х	Х	Х	Х

- X Mounting height is possible.
- X\* Mounting height is possible, but non-duct opening exposed.
- --- Mounting height is not possible.
- a. Minimum hood distance above cook top must not be less than 24". A maximun of 36" above cook top is highly recommended for best capture of cooking impurities. Distances over 36" are at the installer and user's discretion; and if ceiling height and flue length permit.
- B. Requires optional 10-ft. to 11-ft. flue extension, ducted model AEIC34SB.

