

Model ILR4822L4

GENERAL

ILR4822L and **ILR4822R** drop-in sink-ette with single drainboard. The ideal solution to where to drop a hot pot! Highest quality Lustertone sink bowls and integral fan pitched drainboard seamlessly drawn of #18 gauge, type 304 (18-8) nickel bearing stainless steel. Self-rimming.

DESIGN FEATURES

Bowl Depth: 7-1/2".

Coved Corners: 1-3/4" radius.

Finish: Exposed surfaces are hand blended to a lustrous highlighted Lustertone satin finish.

Underside: Fully undercoated to prevent condensation and deaden sound.

OTHER

Drain Opening: 3-1/2".

Faucet Holes: Available with 1, 2, 3 or 4, 1-1/2" diameter faucet holes, 4" center to center.

Suffix "L" (left) or "R" (right) denotes sink bowls are to left or right of drainboard.

NOTE: Unless otherwise specified, sink is furnished with 4 faucet holes as shown.

OPTIONAL ACCESSORIES

Rinsing Baskets: LKRB1611 and LKERBSS. Bottom Grid: LKBG1613. Cutting Boards: CB1713 and CBT1713.

These sinks comply with ANSI Standard A112.19.3M.




These sinks are listed by the International Association of Plumbing and Mechanical Officials as meeting the requirements of the Uniform Plumbing Code.

SINK DIMENSIONS (INCHES)*

Model	Overall		Inside Each Bowl			Drain- board	Bowl	Cutout in Countertop (1 ¹ /2" Radius Corners)		No. of 1½" Dia. Faucet Holes	Minimum Cabinet	Ship. Wt.
Number	L	W	L	W	D	Length	Location	L	W	4" Center	Size	Lbs.
ILR4822L	48	22	13 ¹ /2	16	71/2	177/8	Left	47 ³ /8	21 ³ /8	1, 2, 3 or 4	51	33
ILR4822R	48	22	13 ¹ /2	16	71/2	17 ⁷ /8	Right	47 ³ /8	21 ³ /8	1, 2, 3 or 4	51	33

*Length is left to right. Width is front to back.

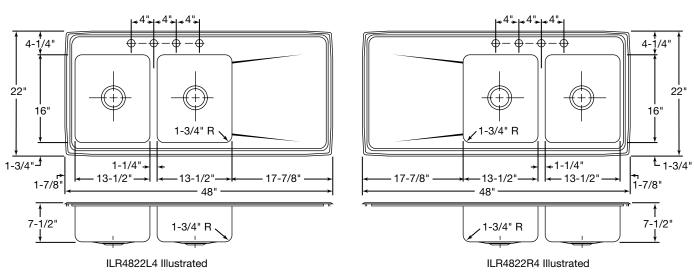

ALL DIMENSIONS IN INCHES, TO CONVERT TO MILLIMETERS MULTIPLY BY 25.4.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

Model ILR4822R4