

# NOIR™ 24" Built-In Dishwasher, 39 dBA

# JDTS3924SM



## Features

### Quiet Performance

Setting the standard in quiet performance, with dishwashers as quiet as 38 dBA—no luxury brand is quieter.

### Best Dry Performance in its Class

Best Dry Performance in its Class\* among Dishwashers with Automatic Door Opening Systems \*among luxury dishwasher brands

### Superior Glide Middle Rack

Strong and stable. The middle rack glides smoothly and quietly, even when fully loaded. Each rail features 52 ball bearings for quiet operation.

### WaterLock Leak Detection System

Measures and monitors the flow of water throughout the cycle through three levels of protection against potential sources of leaks. If there is a problem, the dishwasher will drain the tub and alert you.\*

### Precise Fit 3rd Rack for Cutlery with Plasma Coating

This slim profile, top-tier rack organizes extra utensils and overflow silverware without sacrificing storage space below. This rack is treated with a specialized water repellent tech that whisks away water on contact, producing dryer utensils.

### 13 Place Setting Capacity

Enough capacity for a service of 13 means there's always room for one more.



## Accessories

Tall Tub Dishwasher Drain Hose Extension	3385556
Moisture Barrier Kit	4396277
Water Line Installation Kit	W10278635RP
Power Cord Kit, Right Angle	W11365014
Power Cord Kit, Straight	W11365011
Water Inlet Fitting	W10685193
affresh® Dishwasher Cleaner - 6 Count	W10549851
Under-Counter Bracket	W10426979
ADA Rotary Rack	W11741323


## Product Details

Dimensions	23 <sup>7</sup> / <sub>8</sub> " W x 33 <sup>5</sup> / <sub>8</sub> " H x 24 <sup>1</sup> / <sub>2</sub> " D
Cutout Dimensions	Min: 24" W x 33 <sup>1</sup> / <sub>2</sub> " H x 24 <sup>1</sup> / <sub>2</sub> " D Max: 24" W x 34 <sup>1</sup> / <sub>2</sub> " H x 24 <sup>1</sup> / <sub>2</sub> " D
Sound Level (dBA)	39 dBA
# of Racks	3
# of Wash Cycles	6
Dry System	Door Opening System with Fan Dry with Heating Element
Energy Rating	240 kWh

Specifications are subject to change without notice. This information is up to date as of February 4, 2025. Verify Owners Manual prior to finalizing your cabinetry/enclosures.

## Cutout Dimensions

**IMPORTANT:** Check that all surfaces have no protrusions that would prohibit dishwasher installation.

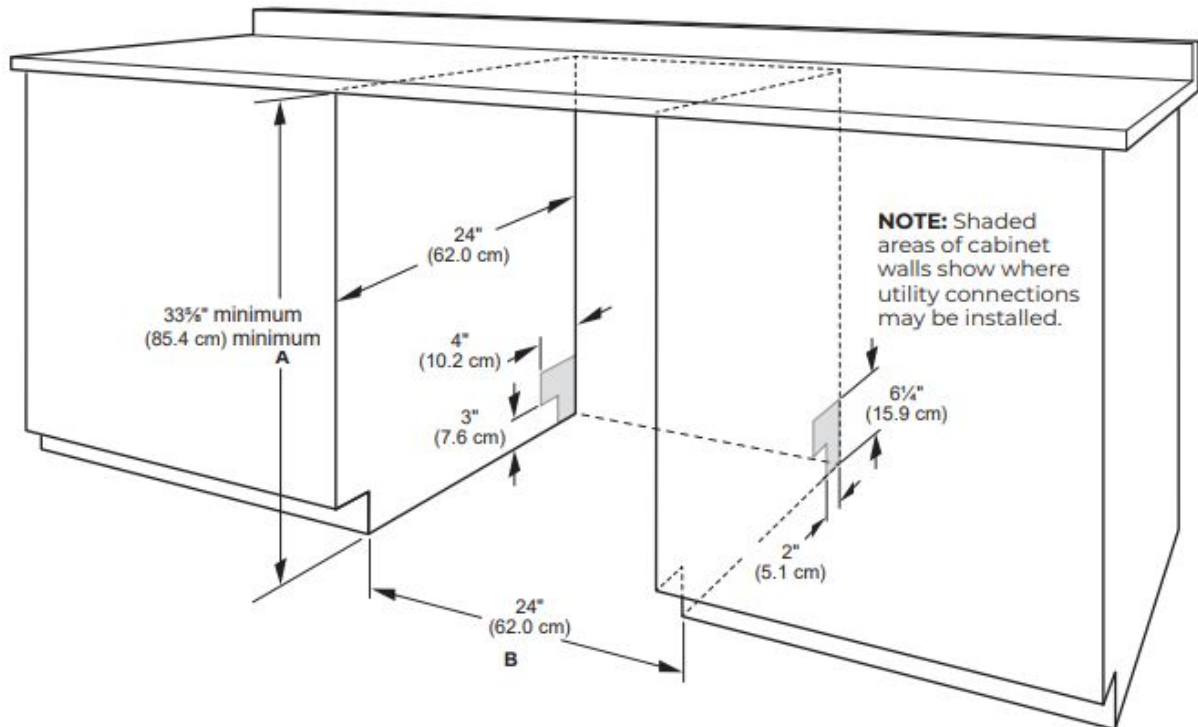

A. Measured from the lowest point on the underside of the countertop. May be reduced to 33 3/8" minimum (85.4 cm) minimum by removing the feet and perforated area of insulation (blanket) on dishwasher.

B. Minimum, measured from narrowest point of opening.

**NOTE:** Corner locations require a 2" (5.1 cm) minimum clearance between the side of the dishwasher door and the wall or cabinet.

## Plumbing

- This dishwasher has a water heating feature and also requires a connection to a hot water supply line.
- A hot water line with 20 psi to 120 psi (138 kPa to 862 kPa) water pressure can be verified by a licensed plumber.
- 120°F (49°C) water at dishwasher.
- 3/8" (0.95 cm) O.D. copper tubing with compression fitting or flexible braided water supply line.  
**NOTE:** 1/2" (1.3 cm) minimum plastic tubing is not recommended.
- A 90° elbow with 3/4" (0.95 cm) hose connection with rubber washer.
- Do not solder within 6" (15.2 cm) of the water inlet valve.

## Electrical

- 120 V, 60 Hz, AC only, 15 A or 20 A, fused electrical supply
  - Copper wire only
  - A maximum of 2 field wiring supply conductors (12 AWG largest size) plus 1 grounding conductor are permitted in the terminal box.
- We Recommend:**
- A time-delay fuse or circuit breaker.