


Wall Mount Liner Insert with Ductless Ventilation (ARS)

Designed for kitchens where exterior ducting is not possible, this liner insert uses patented ARS (Air Recovery System) technology that combines centrifugal grease extraction with advanced filtration to remove grease, smoke and cooking odors before redistributing air throughout the space. Dishwasher-safe components simplify cleanup.


To view available finishes & accessories please visit ventahood.com/products/KAH34SLD

SPECIFICATIONS

WIDTH	34 3/8"
DEPTH	18"
HEIGHT	6"
CFM ¹	N/A
SOUND RATING (HIGH SPEED) ²	2.5 Sones / 48.3 dB
LIGHTING ³	2 LED Prongs 3000K Warm White

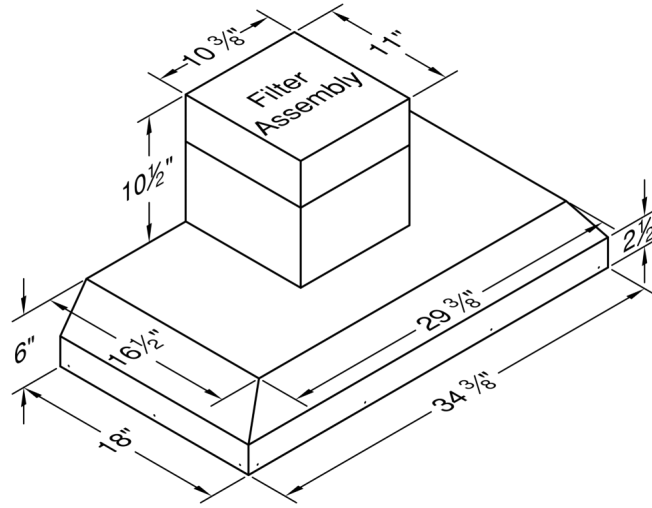


RECOMMENDED MOUNTING HEIGHT

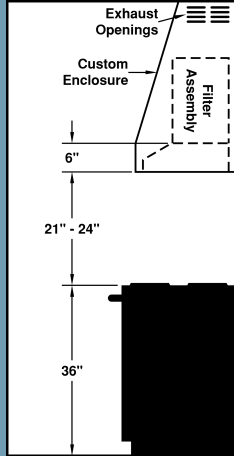

NOTE: Exceeding recommended mounting height may compromise performance.

CONNECTIONS

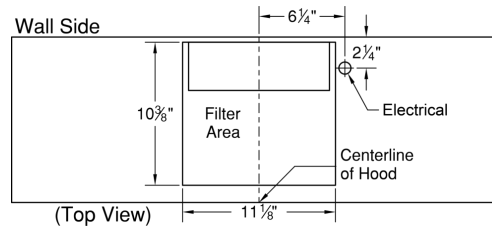

A minimum of 25 sq. in. of exhaust opening space per blower/filter assembly, located above the filter assembly outlet (top), is required for proper air recirculation.

Access to the filter assembly via access panel in the cabinet is required for routine filter maintenance.

ELECTRICAL/MECHANICAL SPECIFICATIONS FOR BLOWER UNIT

MODEL	VOLTS	AMPS	HZ	RPM	CFM @ 0.0" SP ⁴	CFM @ 0.1" SP	CFM @ 0.2" SP	CFM @ 0.3" SP	MIN. ROUND DUCT SIZE
K250 ARS	115	3.5	60	1550	N/A	N/A	N/A	N/A	N/A

¹ CFM (cubic feet per minute) measures airflow. ² Sones measure perceived loudness—lower values indicate quieter operation. Decibel values shown are approximate equivalents. ³ This model is not available with heat lamps. ⁴ Airflow (CFM) decreases as duct resistance (static pressure) increases. Values at 0.1"–0.3" SP reflect typical installed conditions.