


400 Series

Gas cooktop

Width 36" (90 cm)



KG 491-110 CA

Propane gas

KG 491-210 CA

Natural gas

KG 491-...

All-gas appliance for natural or bottled gas.

– **Sturdy stainless steel, solid smooth-surface cast grids and large professional front control knobs.** A bit of professional kitchen for the home.

– **58,000 BTU on five burners including wok burner.** Professional cooking for large numbers of guests.

– **Convenient operation with automatic quick ignition.** Simply move the switch to the required position and release like on an electric cooktop.

Brushed stainless steel gas cooktop.

Front control knobs with ring and output markings.

Five brass gas burners:

Two two-ring super-high output burners 500 - 13,600 BTU (150 – 4000 W), suitable for pots up to max. Ø 11".

Two two-ring standard burners 500 - 6,800 BTU (150 – 2000 W), suitable for pots up to max. Ø 9 1/2".

One three-ring super-high output burner 1,000 - 17,000 BTU (300 – 5000 W), suitable for pots up to max. Ø 12 5/8".

High useful benefit thanks to ideal burner configuration, electronics and a broad output spectrum.

Automatic quick ignition.

Electronic flame recognition (ionization principle) with automatic re-ignition.

Three-part pan support with flat, continuous pot surface.

Gas valve with fine control.

Rating:

Total rating: 58,000 BTU

Total Amps: 1

120V / 60Hz

Optional accessories:

VV 400-000 Connecting strip

for combination with other Vario appliances (not when using the cooktop ventilator).

SV 405-001 Shaft extension

up to 3 1/8" (see drawing 1 on next page).

SV 405-002 Shaft extension

up to 6 5/16" (see drawing 1 on next page).

SV 405-003 Shaft extension

up to 12 5/8" (see drawing 1 on next page).

SV 405-011 Shaft extension

up to 2 9/16" (see drawing 2 on next page).

SV 405-012 Shaft extension

up to 5 1/2" (see drawing 2 on next page).

WP 400-001 wok pan made of

multiple-layered material, with round bottom and handle. Ø 14 3/16", 5.3 quarts. height 3 15/16".

Planning notes:

Panel thickness $5/8" - 1"$. The sketch below must be observed if the panel is more than 1" thick (there must be a recess at the rear).

Control knobs can be integrated in the bottom cupboard at drawer level.

Installation in a 36" bottom cupboard.

Air admission from above.

No intermediate shelf required.

The gas cooktop is equipped with a 55" connecting cable and a grounded plug.

The appliance must be set up and connected in accordance with the applicable installation specifications.

A ventilator hood must be switched on during operation of the gas cooktop. The rear panel must consist of a non-flammable material.

Wall trims must be heat-resistant.



A minimum clearance of 12" from adjacent heat-sensitive wooden side panels must be observed or thermal insulation must be installed.

Distance between hood and gas cooktop should be between 30" and 36".


Cooktop clamping range: $1\ 3/16" - 2"$.

The appliance is not operable without electrical connection.




Possible shaft extension prolongation



Drawing 1

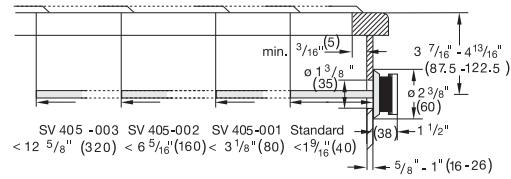

Drawing 2

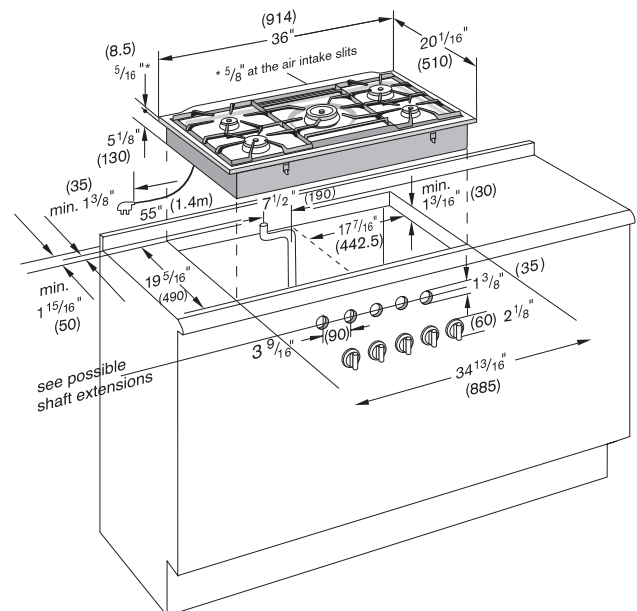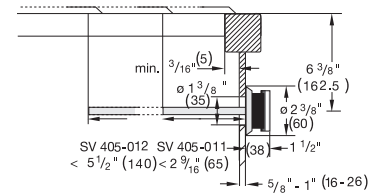

Numbers indicated inside parenthesis () = mm