

Miele

30" Rangetop

KMR 1124 G/LP



Shown: KMR 1135 G under DAR 1120
Please note: This information is subject to change

mieleusa.com
Specification Sheet TRS 04252018

30" Rangetop

SPECIFICATIONS	
Overall Unit Dimensions	29 ¹⁵ / ₁₆ " (762 mm) W x 7 ¹ / ₂ " (191 mm) H [Not including grates] x 26 ¹ / ₂ " (673 mm) D [Depth to control panel]
Niche	
Minimum Cabinet Niche Opening	30" (762 mm) W x 25 ¹ / ₁₆ " (636.6 mm) D [To back of control panel]
Minimum Support Thickness	³ / ₄ " (19 mm)
Gas	
Gas Line Connection	1/2" NPT
Operational Altitudes	
High Altitude	Miele Natural Gas and LP Rangetops will function up to 9,800 ft. in altitude without adjustment. If an installation exceeds these elevations, please contact rangejetkit@mieleusa.com.
Electrical	
Electrical Requirements	120V, 60Hz, 15 Amps
Power Cord	Yes - NEMA 5-15 plug, 4 ft (1.2 m) long
Shipping	
Shipping Weight	110.2 lbs. (50 kg)
Installation Accessories	
12" Backguard	RBGAG1230
20" Backguard	RBGAG2030
40" Backsplash	RBS30
Support	
Call	800.843.7231
Miele Website	www.mieleusa.com
20/20 Link	2020technologies.com




KMR 1124
Item 26112450USA

HR 1124 LP
Item 26112451USA


30" Rangetop

PRODUCT VIEWS


Front View

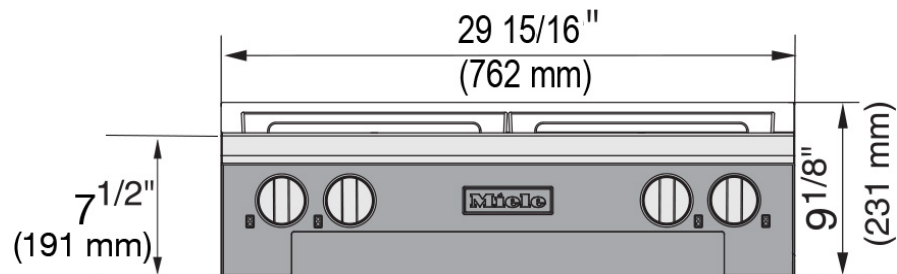

Side View

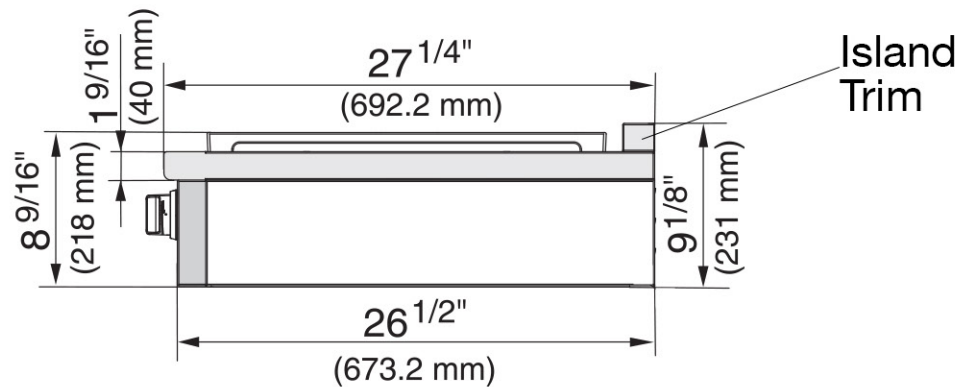

Rear View

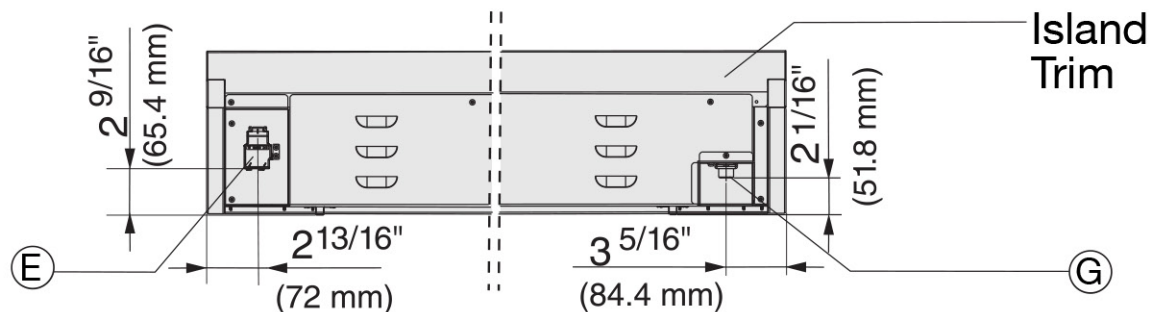

Length of power cord is 4 ft. (1.2m)

E = Electrical connection

G = Gas connection


30" Rangetop

30" Rangetop BTU Output

KMR1124 Burners

Gas Burners: (1) 12,500 BTU (G/LP);
(3) 19,500 BTU (G/LP)

Total BTU Output 71,000 BTU (G/LP)

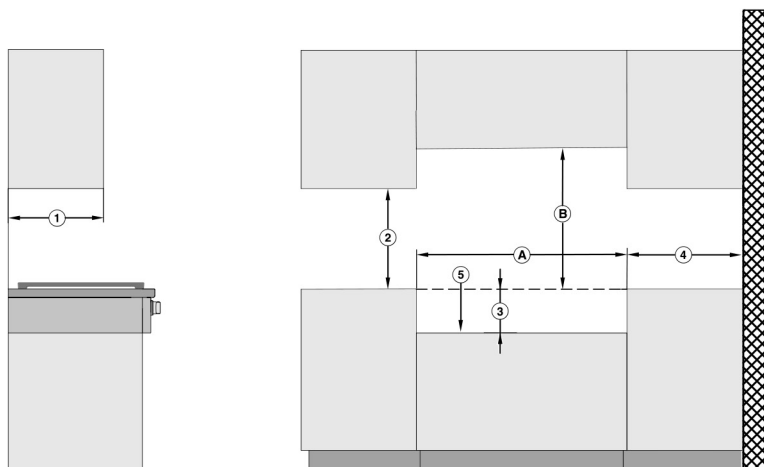

Position	Dimensions	Description
①	13" (330 mm)	Maximum depth of top cabinet
②	18" (457 mm)	Minimum distance to bottom edge of top cabinet
③	7 ¹ / ₂ " (190.5 mm)	Distance between the top edge of the countertop and the top edge of the support base
④	10" (254 mm)	Minimum distance to combustible surfaces
⑤		Support base ¹⁾
Ⓐ	min. 30" (762 mm)	Niche width
Ⓑ	37" (940 mm)	Minimum distance between the top of the cooking area and the bottom of an unprotected combustible surface.
	30" (762 mm)	Minimum distance between the top of the cooking area and the bottom of the Miele Range Hood (DAR model with DRxB XL blower).
	For all other hoods please consult the manufacturer's specifications for required distances.	

1) The support base must have a minimum thickness of ³/₄" (19.05 mm).
At the rear right of the support base, a cut-out of 5 1/8" x 7 1/8" (130 mm x 80 mm) must be provided (gas connection) and, at the rear left, a cut-out of 4 6/8" x 1 9/16" (120 mm x 40 mm) (electrical connection).

Note:

Please observe safe distances to rear combustible surfaces of 12" (305 mm) clearances. For zero clearance installation, Miele Backguards will satisfy the required distance to combustible surfaces. The Miele Backguard is available in 12" (305 mm) or 20" (508 mm) heights.