

## KMR 1136-3 G/LP

### 36" All Gas (4 Burner/Griddle) Rangetop

#### Features:

- Direct Control - Knobs with light ring to instantly see if burner is on or off
- Comfort Clean gates - Easy to clean, dishwasher safe grates
- Clean Touch Steel™ finish - No fingerprints on stainless steel surfaces
- 1 Continuous Simmer Burner - The perfect temperature and even heat for delicate cooking
- M Pro Infrared Griddle - great results for everything from pancakes to hamburgers




#### Included:

- Griddle Cover Set (RGGC 1000)

| MATERIAL # |          |
|------------|----------|
| Gas        | 11588030 |
| LP         | 11588640 |

| SPECIFICATIONS                |  |
|-------------------------------|--|
| Overall Unit Dimensions       | 35 <sup>15</sup> / <sub>16</sub> " (915 mm) W x 7 <sup>1</sup> / <sub>2</sub> " (191 mm) H x [Height does not including Grates] 26 <sup>1</sup> / <sub>2</sub> " (673 mm) D [Depth to control panel] |
| Niche                         |  |
| Minimum Cabinet Niche Opening | 36" (915 mm) W x 25 <sup>1</sup> / <sub>16</sub> " (636.6 mm) D [To back of control panel]   |
| Operational Altitudes         |  |
| High Altitude                 | Miele Natural Gas and LP Rangetops will function up to 6,500 ft. in altitude without adjustment.   |
| Electrical                    |  |
| Electrical Requirements       | 110V / 120V, 60Hz, 15 Amps   |
| Power Cord                    | NEMA 5-15 plug, 4 ft (1.2 m)   |
| Shipping                      |  |
| Shipping Weight               | 145.5 lbs (66 kg)  |
| Shipping Dimensions           | ?? <sup>1</sup> / <sub>x</sub> " W x ?? <sup>1</sup> / <sub>x</sub> " H x ?? <sup>1</sup> / <sub>x</sub> " D   |

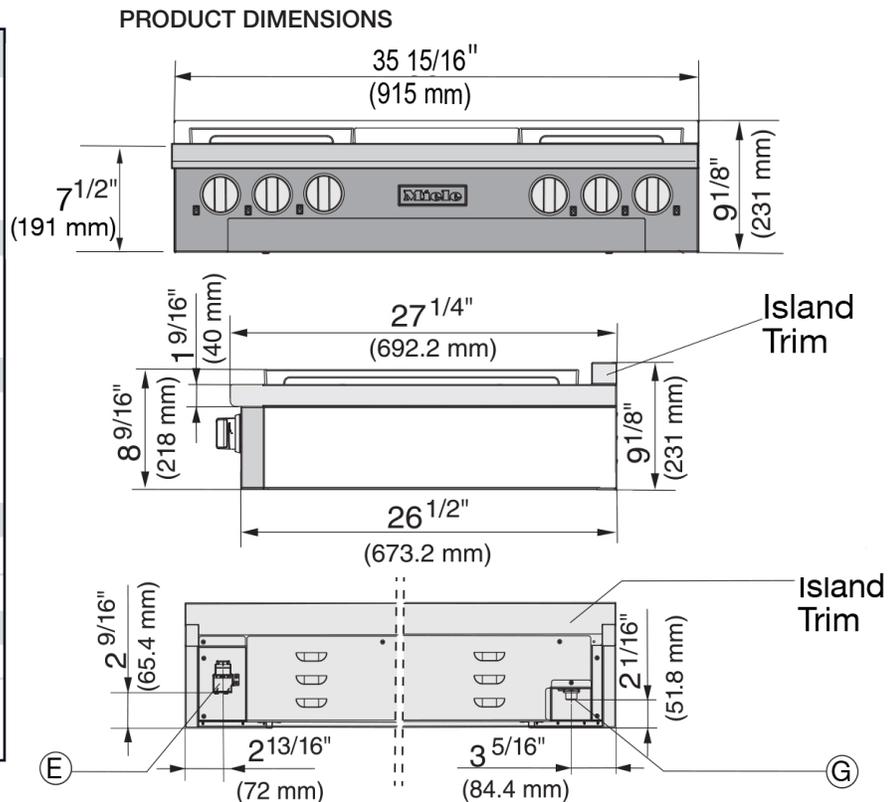


Length of power cord is 4 ft.

E = Electrical connection

G = Gas connection

## BTU Output

|                  |                        |
|------------------|------------------------|
| Gas Burners:     | (1) 12,500 BTU (G/LP); |
|                  | (1) 13,600 BTU (G)     |
|                  | 13,000 BTU (LP);       |
|                  | (2) 19,500 BTU (G)     |
| Griddle Burner:  | 13,000 BTU (G);        |
|                  | 14,300 BTU (LP)        |
| Total BTU Output | 78,100 BTU (G)         |
|                  | 78,800 BTU (LP)        |

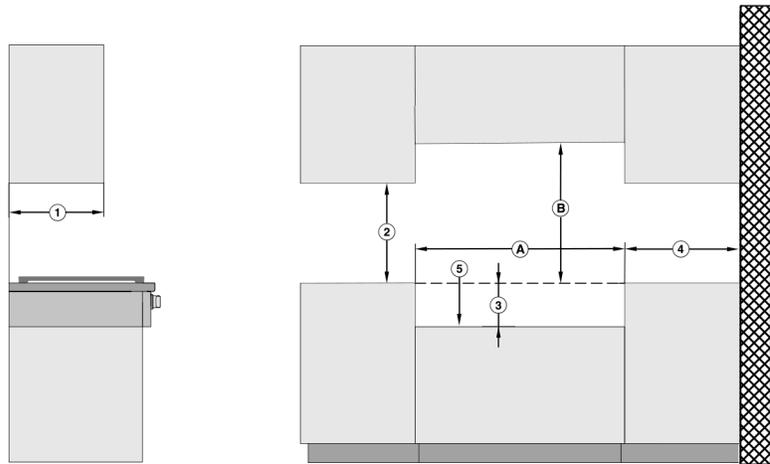

| Position   | Dimensions                                 | Description   |
|--|--|---|
| ①  | 13" (330 mm)                               | Maximum depth of top cabinet  |
| ②  | 18" (457 mm)                               | Minimum distance to bottom edge of top cabinet  |
| ③  | 7 <sup>1</sup> / <sub>2</sub> " (190.5 mm) | Distance between the top edge of the countertop and the top edge of the support base  |
| ④  | 10" (254 mm)                               | Minimum distance to combustible surfaces  |
| ⑤  |  | Support base <sup>1)</sup>  |
| Ⓐ  | min. 36" (915 mm)                          | Niche width   |
| Ⓑ  | 37" (940 mm)                               | Minimum distance between the top of the cooking area and the bottom of an unprotected combustible surface.                                      |
|  | 30" (762 mm)                               | Minimum distance between the top of the cooking area and the bottom of the Miele range hood (DAR model with DRxB XL blower or DRxB XXL blower). |
| Refer to the Installation instructions for the Miele ventilation hood, Appliance dimensions (Distance between cooktop and ventilation hood (S)).<br>For all other hoods please consult the manufacturer's specifications for required distances. |  |   |

1) The support base must have a minimum thickness of <sup>3</sup>/<sub>4</sub>" (19.05 mm).  
 At the rear right of the support base, a cut-out of 5 1/8" x 7 1/8" (130 mm x 80 mm) must be provided (gas connection) and, at the rear left, a cut-out of 4 6/8" x 1 9/16" (120 mm x 40 mm) (electrical connection).