

LB26H2200_

25.5 cu.ft. capacity Bottom Freezer Refrigerator

25.5 cu.ft Large Capacity

ENERGY STAR® Certified

Wi-Fi Enabled

ThinQ®

Smart Inverter Compressor

AVAILABLE COLORS



- PRINTPROOF™ STAINLESS STEEL
- BLACK STAINLESS STEEL



ThinQ Care

- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.

SUMMARY		REFRIGERATOR DOOR		DIMENSIONS/CLEARANCES/WEIGHTS	
Refrigerator (cu.ft.)	17.2	No. of Door Bins	3	Total (WxHxD)	32 15/16" x 69 15/16" x 35 15/16"
Freezer (cu.ft.)	8.3	Door Shape	Flat	Width	32 15/16"
Total Capacity (cu.ft.)	25.5	Handle Type	Bar (New)	Height (Top of Hinge or Door cap Décor)	69 15/16"
ENERGY		FREEZER		Depth (with Handle)	35 15/16"
ENERGY STAR® Certified	Yes	Door Type	Pull Drawer	Width (Door Open 90° without Handle)	34 7/16"
Energy Consumption (kWh/Year)	562	Handle Type	Pocket Handle	Case Edge Clearance (Door Fully Open)	12 15/32"
ICE & WATER SYSTEM		Drawers / Shelves	2-Tier Organization	Width (Door Open 90° with Handle)	36 13/16"
Dispenser	N/A	Drawer Divider	Yes	Width (Door Fully Open without Handle)	46 7/8"
No. Freezer Ice Maker	1	Freezer Light	LED Lighting	Door Edge Clearance with Handle	4 1/16"
Freezer Ice Type	Cubed	No. of Door Bins/Construction	2	Door Edge Clearance without Handle	1 11/16"
Freezer Daily Ice Production	2.5 / 2.8 (Ice Plus) lbs.	DISPLAY		Height to Top of Case	68 5/8"
Freezer Ice Storage Capacity	5.1 lbs	Display Type	Membrane/ White LED	Height (Floor to Top of Freezer Door)	27 5/8"
Ice Plus	Yes	Temperature Control	Electronic/ Digital	Depth without Door	29 1/2"
Filtration System	1 Stage	Door Alarm	Yes	Depth without Handles	33 7/16"
Filter	LT1000P	Child Lock	Yes	Depth (to Hinge Cover)	19 5/8"
COOLING		Smart Diagnosis	Yes	Depth (Total with Door Open)	63 1/4"
Compressor Type	Smart Inverter Compressor	Auto Closing Door Hinge	No	Depth (Draw Open Fully without Handle)	53 3/8"
Refrigerant	R600a / 70g / 2.47oz	Wi-Fi Enabled	Yes	Installation Clearance	Sides 1/8", Top 1", Back 2"
Evaporator	1	ThinQ®	Yes	Carton Dimensions (WxHxD)	35" x 72" x 36 11/16"
Multi Air Flow Cooling	Yes	ThinQ® Care (Proactive Customer Care)	Yes	Weight (Unit/Carton)	234 lb / 250lb
Temperature Sensors	2	Sabbath Mode	Yes	LIMITED WARRANTY	
REFRIGERATOR		ADA Compliant	Yes	Parts & Labor	1 Year
No. of Shelves	4 Split (4 Fixed)	Garage Ready	No	Sealed System (Parts & Labor)	5 Years
Shelf Construction	Spill Protector Tempered Glass	MATERIALS & FINISH		Compressor (Parts & Labor)	5 Years
Shelf Trim	White décor	Hidden Hinges	Yes	Inverter Compressor (Parts only)	10 Years
No. of Crisper Bins	2	Surface	Smooth	UPC CODES	
Pantry (Glide N Serve)	Yes (Normal)	Toe Grill	No	LB26H2200S	195174122310
Cool Guard	No	All Available Colors	PrintProof™ Stainless Steel Black Stainless Steel	LB26H2200D	195174122341
Duct (Air Filter)		Insulation	Low GWP and Zero ODP Blowing Agent		
[Fresh Air Filter, Multi Air Flow]	Multi Air Flow				
Light	Yes				
Light (Back Lit Lighting)	No				
Backwall [Metallic Décor, White Decor, LED Backwall]	White décor				

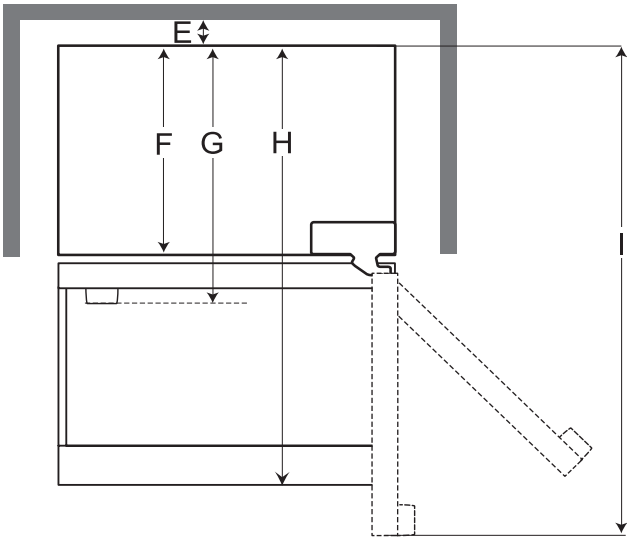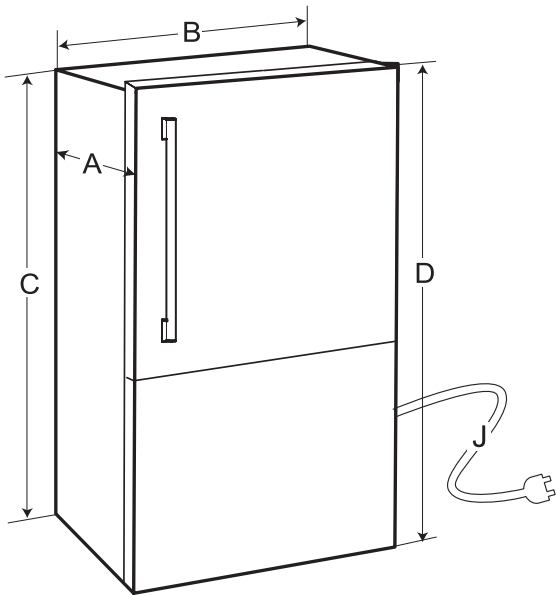

DIMENSION / CLEARANCES

- Check the dimensions of the appliance and the installation path to ensure there is sufficient room to move the refrigerator through doors or narrow openings.
- If an opening is too narrow to fit the refrigerator through, remove the refrigerator doors. See Removing/ Assembling the Doors and Drawers in this manual.
- The installation location chosen for the refrigerator should allow space behind the unit for connections and airflow and space in front to open the doors and drawers.
- Too small of a distance from adjacent items may result in lowered freezing capability and increased electricity consumption charges. Allow at least 24 inches (610 mm) in front of the refrigerator to open the doors, and at least 2 inches (50.8 mm) between the back of the refrigerator and the wall.

DIMENSIONS		
A	Depth without Handle	35 15/16" (913 mm)
B	Width	32 15/16" (836 mm)
C	Height to Top of Case	68 5/8" (1743 mm)
D	Height to Top of Hinge	69 15/16" (1776 mm)
E	Back Clearance	2" (51 mm)
F	Depth without Door	29 1/2" (748 mm)
G	Depth with Handle	35 15/16" (912 mm)
H	Depth (Total with Freezer Drawer Open)	54 3/8" (1381 mm)
I	Depth (Total with Door Open 90°)	63 1/4" (1606 mm)
J	Length of Power Cord	61" (1550 mm)

LEVELING THE REFRIGERATOR

The refrigerator has two front leveling legs. Adjust the legs to alter the tilt from front-to-back or side to side. If the refrigerator seems unsteady or the doors do not close easily, adjust the refrigerator's tilt, using the instructions below:

1. Turn the leveling leg to the left to raise that side of the refrigerator or to the right to lower it. It may take several turns of the leveling leg to adjust the tilt of the refrigerator.
2. Open both doors, and check to make sure that they close easily. If the doors do not close easily, tilt the refrigerator slightly more to the rear by turning both leveling legs to the left. It may take several more turns, and be sure to turn both leveling legs the same amount.

NOTE
• A flare nut wrench works best, but an open-end wrench will suffice. Do not over-tighten.

