

GENERAL

Highest quality sink bowls are seamlessly drawn of #18 gauge, type 304 (18-8) nickel bearing stainless steel. Self-rimming.

DESIGN FEATURES

Bowl Depths: 10" (left bowl), 8" (right bowl).

Bowl and Faucet Deck Recessed: 3/16" below outside edge of

sink.

Coved Corners: 1-3/4" radius.

Finish: Exposed surfaces are hand blended to a lustrous high-

lighted Lustertone® satin finish.

Underside: Fully protected by heavy duty Sound Guard® undercoating to prevent condensation and deaden sound.

OTHER


Drain Opening: 3-1/2".

Faucet Holes: Available with 1, 2 or 3, 1-1/2" diameter faucet

holes. 4" centers.

OPTIONAL ACCESSORIES

Rinsing Basket: LKRB1520. Bottom Grid: LKOBG1814.

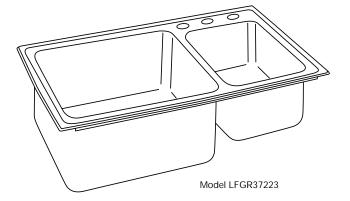

This sink complies with ANSI Standard A112.19.3M.





This sink is listed by the International Association of Plumbing and Mechanical Officials as meeting the requirements of the Uniform Plumbing Code.

SINK DIMENSIONS (INCHES)*

Model Number	Overall		Inside Left Bowl			Inside Right Bowl			Cutout in Countertop (1¹/2" Radius Corners)		Number of 1½" Dia. Faucet Holes	Minimum Cabinet	Ship. Wt.
	L	W	L	W	D	L	W	D	L	W	4" Center	Size	Lbs.
LFGR3322	33	22	16	19	10	11 ¹ / ₂	16	8	323/8	213/8	1, 2 or 3	36	25
LFGR3722	37	22	20	18	10	11 ¹ / ₂	16	8	363/8	213/8	1, 2 or 3	42	28

^{*}Length is left to right. Width is front to back.

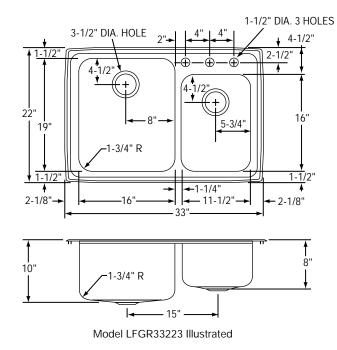

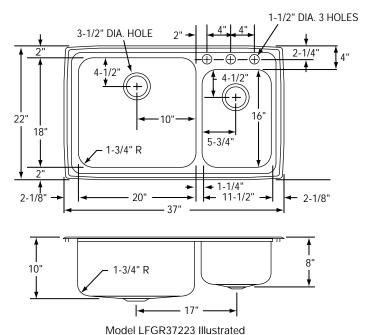

ALL DIMENSIONS IN INCHES, TO CONVERT TO MILLIMETERS MULTIPLY BY 25.4.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.