

LRFLC2706_

3 Door French Door Refrigerator

- LG's Largest Counter-Depth Capacity
- Modern Sleek Design
- Internal Water Dispenser
- Single Ice Maker
- Cool Guard
- Door Cooling+
- LG ThinQ
- ENERGY STAR® Qualified
- Sabbath Mode

KEY FEATURES

SMART APPLIANCE

PRODUCT FEATURES

AVAILABLE COLORS

- PRINTPROOF™ STAINLESS STEEL
- BLACK STAINLESS STEEL



Proactive Smart Alerts to Keep Your Appliances Running Smoothly



ThinQ Care

- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.

SUMMARY	
Refrigerator (cu.ft.)	17.8
Freezer (cu.ft.)	8.7
Total Capacity (cu.ft.)	26.5
ENERGY	
ENERGY STAR® Certified	Yes
Energy Consumption (kWh/Year)	632
ICE & WATER SYSTEM	
Dispenser	Internal Water Only
No. Freezer Ice Maker	1
Freezer Ice Type	Cubed
Freezer Daily Ice Production	2.5 / 2.7 (Ice Plus) lbs.
Freezer Ice Storage Capacity	4.0 lbs
Ice Plus	Yes
Filteration System	1 Stage
Filter	LT1000P
COOLING	
Compressor Type	Smart Inverter Compressor
Refrigerant	R600a / 57g / 2.01oz
Evaporator	1
Multi Air Flow Cooling	Yes
Temperature Sensors	9
REFRIGERATOR	
No. of Shelves	4 Split (4 Fixed)
Cantilevered	Hybrid Cantilevered
Shelf Construction	Spill Protector™ Tempered Glass
Shelf Trim	White décor
No. of Crisper Bins	2
Pantry (Glide N Serve)	Yes (Normal)
Cool Guard	Yes
Light	Yes
Fresh Air Filter	Yes
Light	Yes
REFRIGERATOR DOOR	
No. of Door Bins (left door)	8 Total (2 Adjustable Gallon Sized)
Door Bin Construction	1 Piece (Clear)
Handle Type	Bar

FREEZER	
Door Type	Pull Drawer
Handle Type	Pocket Handle
Drawers / Shelves	2-Tier Organization
Durabase™ Solid Drawer Base	Yes
Drawer Divider	Yes
Freezer Light	LED Lighting
Freezer Handle	SmartPull™ Handle
Ice Bin / Indoor Ice	Yes
DISPLAY	
Display Type	Smooth Touch Control / White LED
Temperature Control	Electronic/ Digital
Door Alarm	Yes
Child Lock	Yes
Decibel™ Quiet Operation	Yes
Smart Diagnosis	Yes
Auto Closing Door Hinge	Yes
Wi-Fi Enabled	Yes
ThinQ®	Yes
PCC (Proactive Customer Care)	Yes
Special Features	Door Cooling+
Sabbath Mode	Yes
ADA Compliant	Yes
MATERIALS & FINISH	
Flat Type Door	Yes
Hidden Hinges	Yes
Surface	Smooth
Handles	Matching Commercial Handles
All Available Colors	PrintProof™ Stainless Steel Black Stainless Steel
Insulation	Low GWP and Zero ODP Blowing Agent

DIMENSIONS/CLEARANCES/WEIGHTS	
Total (WxHxD)	35 3/4" x 70 1/4" x 29 1/8"
Width	35 3/4"
Height (Top of Hinge or Door cap Décor)	70 1/4"
Width (Door Open 90° without Handle)	40"
Case Edge Clearance (Door Fully Open)	21" (R) 9 5/8" (L) 11 3/8"
Width (Door Fully Open without Handle)	56 3/4"
Door Edge Clearance without Handle	2 1/4"
Height to Top of Case	68 7/8"
Height (Floor to Top of Freezer Door)	27 7/8"
Depth without Door	24 3/4"
Depth without Handles	29 2/8"
Depth (to Hinge Cover)	18 1/4"
Depth (Total with Door Open)	43 5/8"
Depth (Draw Open Fully without Handle)	48 7/8"
Installation Clearance	Sides 1/8", Top 1", Back 2"
Carton Dimensions (WxHxD)	38" x 73" x 32"
Weight (Unit/Carton)	249 lbs / 271 lbs
LIMITED WARRANTY	
Parts & Labor	1 Year
Sealed System (Parts & Labor)	5 Years
Compressor (Parts & Labor)	5 Years
Linear Inverter Compressor (Parts only)	6-10 Years
UPC CODES	
LRFLC2706S	195174039274
LRFLC2706D	195174039281

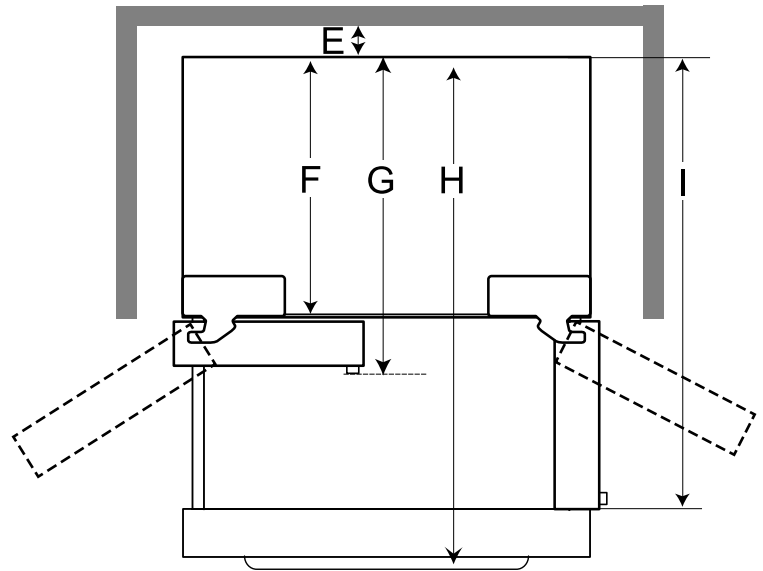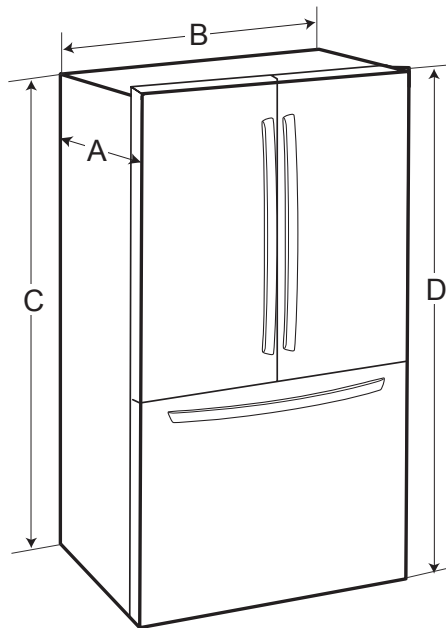

DIMENSION / CLEARANCES

- Check the dimensions of the appliance and the installation path to ensure there is sufficient room to move the refrigerator through doors or narrow openings.
- If an opening is too narrow to fit the refrigerator through, remove the refrigerator doors. See Removing/ Assembling the Doors and Drawers in this manual.
- The installation location chosen for the refrigerator should allow space behind the unit for connections and airflow and space in front to open the doors and drawers.
- Too small of a distance from adjacent items may result in lowered freezing capability and increased electricity consumption charges. Allow at least 24 inches (610 mm) in front of the refrigerator to open the doors, and at least 2 inches (50.8 mm) between the back of the refrigerator and the wall.

DIMENSIONS

A	Depth without Handle	29 1/8" (739 mm)
B	Width	35 3/4" (908 mm)
C	Height to Top of Case	68 7/8" (1750 mm)
D	Height to Top of Hinge	70 1/4" (1785 mm)
E	Back Clearance	2" (50 mm)
F	Depth without Door	24 3/4" (628mm)
G	Depth with Handle	31 5/8" (802mm)
H	Depth (Total with Freezer Drawer Open)	48 7/8" (1239 mm)

LEVELING THE REFRIGERATOR

The refrigerator has two front leveling legs. Adjust the legs to alter the tilt from front-to-back or sideto side.

If the refrigerator seems unsteady or the doors do not close easily, adjust the refrigerator's tilt, using the instructions below:

1. Turn the leveling leg to the left to raise that side of the refrigerator or to the right to lower it. It may take several turns of the leveling leg to adjust the tilt of the refrigerator.
2. Open both doors, and check to make sure that they close easily. If the doors do not close easily, tilt the refrigerator slightly more to the rear by turning both leveling legs to the left. It may take several more turns, and be sure to turn both leveling legs the same amount.

NOTE

- A flare nut wrench works best, but an open-end wrench will suffice. Do not over-tighten.

