

# SPECIFICATIONS

#### FEATURES

- Single hole top mount installation
  - One 1 1/2" (38mm) faucet hole required
  - Maximum countertop thickness 2.5" (63mm)
- Single-lever faucet
- · Pull-out spray with aerated flow and spray function
- · Hand spray operation:
- Press button for spray, rotate with thumb to revert back to stream
- · Braided stainless steel hand spray hose
- Easy-Clean rubberized spray face
- Solid brass construction
- Removable ceramic disc cartridge
- 360° swing spout
- Flexible braided stainless steel supply tubes with 3/8" female compression ends
- Available in the following finishes:
  - Polished Chrome LKLFAV3042CR - Satin Nickel LKLFAV3042NK
- Ship weight is 9.9lbs. (4.5Kg)
- Maximum flow rate
  - 1.5 GPM/5.7 L/min at 60 P.S.I.G.

## WARRANTY

Limited Lifetime


## ACCESSORIES (Sold Separately)


LKAV3054 - Soap Dispenser

#### COMPLIES WITH:

- ADA
- ANSI/NSF61
- ASME A112.18.1/CSA B125.1
- CA AB1953/VT S152
- cUPC Certified



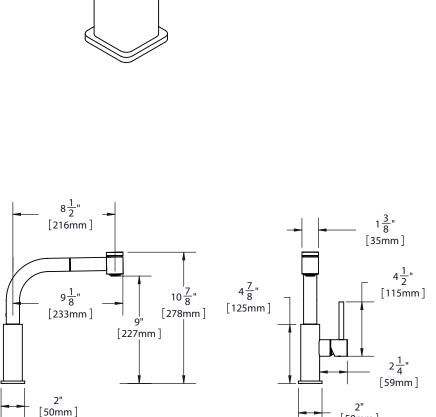



[50mm]