









24''

ARSCT-244

Legend 24" cook top with 4 sealed gas burners. Shown with optional 4" riser.

30"

ARSCT-304

Legend 30" cook top with 4 sealed gas burners. Shown with optional 4" riser.

36"

ARSCT-366

Legend 36" cook top with 6 sealed gas burners. Shown with optional 4" riser.

















ARSCT-244

ARSCT-242GD ARSCT-24X2GR

ARSCT-304

ARSCT-364GD

ARSCT-366

ARSCT-364GR



RAPID HEAT OUTPUT

Rapid heat output and superior heat distribution boils water, sautes and cooks your favorite dishes, while reducing cooking time.

3 sizes of burners serve your everyday needs:

Large burner: 17,000 BTU Medium burner: 13.000 BTU 9,000 BTU Small burner:



our Appliance Auth





48"

ARSCT-486GD

Legend 48" cook top with 6 sealed gas burners and 11" griddle. Shown with optional 4" riser.



ARSCT-488



ARSCT-484GDGF



ARSCT-486GD



ARSCT-4842GD



ARSCT-486GR



ARSCT-484X2GR

60''

ARSCT-606GD

Legend 60" cook top with 6 sealed gas burners, with 11" grill and 11" griddle.

Shown with optional 4" riser.



ARSCT-606GDGR



ARSCT-6062GD



ARSCT-606X2GR



COMMERCIAL GRADE GRILL BURNER

Constructed from Inconel® stainless steel material, a superior alloy developed to withstand high heat and abuse, the 18,000 BTU infrared broiler burner delivers broiling temperatures up to 1,800°F perfect for searing steak, fish or any food of your choice.

This respective burner is utilized in our commercial products.



CUSTOMIZE YOUR COOKTOPS

Customize your cook tops with the configuration that best serves you.

Choose your preferred combination of burners, griddles, broilers and even a step-up burner:

Contact factory for more details.

FFATURES

- 3 sizes of burners to serve your everyday needs: 17,000 BTU (lg), 13,000 BTU (med), 9,000 BTU (sm)
- · Continuous and flush commercial-grade cast iron grates allow for easy transfer of pots and pans across the cooking surface
- Sealed burners deliver exceptional performance at every level setting and lift off to provide easy cleanup
- Sealed burners create simmer temperatures at minimum setting
- · Variable infinite flame settings for all sealed top burners
- Fail-safe system ensures re-ignition in the event the flame goes out even on the lowest burner setting
- Sealed single piece tooled stainless steel cook top can hold more than a gallon of spills
- · Analog controls provide easy, push and turn operation ensuring child safety
- Blue LED lights indicate flame and oven functions provided with every knob
- Heavy metal die-cast black satin knobs with chrome bezels

ACCESSORIES & OPTIONS

- Mirror chrome finish griddle plates available in flat surface & grooved surfaces
- I" standard fabricated Island back
- I" welded Island back
- 4" Stub back
- 20" High back with shelf

- · Removable griddle plate
- Griddle cover
- Grill cover
- Wok Adapter
- Bright red knobs
- Burgundy knobs


SLIDE-IN COOKTOPS CUT-OUT DIMENSIONS


Island or peninsula installations - 10" min, clearance from back of range to combustible surface, Island trim 0" clearance to non-combustible surface. No side wall above cooking surface.

Electrical outlet - standard 3 prong 120 VAC. Allow for shut off valve at gas outlet. Island peninsula installations require a 10" minimum clearance from back of range to a combustible surface. No side wall above cooking surface.

G E Location of gas and electrical supply

overall depth



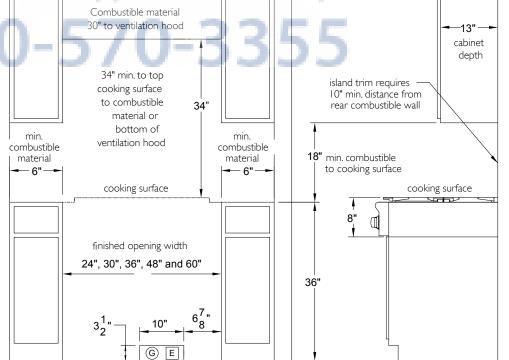

N= Natural Gas Must provide N or L after model for type of gas needed.
L = LP Gas Example: AROFG-30L, represents unit to be built for LP gas.
Must specify elevation if over 1,000 ft. when ordering.








30''




24''

	36''
--	------


24" SLIDE IN 4 BURNER COOKTOP		
Surface Burner Rating	17,000 BTU (lg) - 13,000 BTU (md) - 9,000 BTU (sm)	
Total Gas Connection Rating	ARSCT-244 56,000 BTU 4 burners	
per model #		
Gas Supply	7" W.C. Natural, 11" W.C. Propane	
Electrical Supply	120 VAC 15 AMP 60 Hz Single Phase	
Shipping Weight	80 Lbs	



30" SLIDE IN 4 BURNER COOKTOP			
Surface Burner Rating	17,000 BTU (lg) - 13,000 BTU (md) - 9,000 BTU (sm)		
Total Gas Connection Rating	ARSCT-304 56,000 BTU 4 burners		
per model #			
Gas Supply	7" W.C. Natural, 11" W.C. Propane		
Electrical Supply	120 VAC 15 AMP 60 Hz Single Phase		
Shipping Weight	99.5 Lbs		



36" SLIDE IN COOKTOPS	
Surface Burner Rating	17,000 BTU (lg) - 13,000 BTU (md) - 9,000 BTU (sm)
Total Gas Connection Rating	ARSCT-366 86,000 BTU 6 burners
per model #	ARSCT-364GD 76,000 BTU 4 burners and griddle
	ARSCT-364GR 74,000 BTU 4 burners and grill
Gas Supply	7" W.C. Natural, 11" W.C. Propane
Electrical Supply	120 VAC 15 AMP 60 Hz Single Phase
Shipping Weight	121.5 Lbs



ACCESSORIES	24"	30"	36"	48"	60"
Island Back (Standard)	ARR-24SIB-L	ARR-30SIB-L	ARR-36SIB-L	ARR-48SIB-L	ARR-60SIB-L
Island Back (Welded)	ARR-24IB-L	ARR-30IB-L	ARR-36IB-L	ARR-48IB-L	ARR-60IB-L
4'' Stub Back	ARR-244SB-L	ARR-304SB-L	ARR-364SB-L	ARR-484SB-L	ARR-604SB-L
20" High Back with Shelf	ARR-2421HBS-L	ARR-3021HBS-L	ARR-3621HBS-L	ARR-4821HBS-L	ARR-6021HBS
12'' Grill Cover	N/A	N/A	ARR-GRCOV12-L	ARR-GRCOV12-L	ARR-GRCOV12-L
12'' Griddle Cover	N/A	N/A	ARR-GDCOV12-S-L	ARR-GDCOV12-S-L	ARR-GDCOV12-S-L
24'' Griddle Cover	N/A	N/A	N/A	ARR-GDCOV24-S-L	ARR-GDCOV24-S-L
12'' Removable Griddle Plate	N/A	N/A	ARR-PGP12-L	ARR-PGP12-L	ARR-PGP12-L
24'' Removable Griddle Plate	N/A	N/A	ARR-PGP24-L	ARR-PGP24-L	ARR-PGP24-L
Cutting Board	ARR-CUTB-12-L	ARR-CUTB-12-L	ARR-CUTB-12-L	ARR-CUTB-12-L	ARR-CUTB-12-L
Wok Adapter	ARR-WOK-L	ARR-WOK-L	ARR-WOK-L	ARR-WOK-L	ARR-WOK-L

N= Natural Gas
 L = LP Gas
 Must provide N or L after model for type of gas needed.
 Example: AROFG-30L, represents unit to be built for LP gas.

Must specify elevation if over 1,000 ft, when ordering,









48''

		,	
6			

48" SLIDE-IN COOKTOPS	5		
Surface Burner Rating	17,000 BTU (lg) -	13,000 BTU (m	d) - 9,000 BTU (sm)
Grill Burner Rating	18,000 BTU		
Total Gas Connection Rating	ARSCT-486GD	106,000 BTU	6 burners and griddle
per model #	ARSCT-486GR	104,000 BTU	6 burners and grill
	ARSCT-484GDGR	94,000 BTU	4 burners, grill and griddle
	ARSCT-4842GD	96,000 BTU	4 burners and double griddle
	ARSCT-484X2GR	92,000 BTU	4 burners and double grill
Gas Supply	7" W.C. Natural, 11	'' W.C. Propane	2
Electrical Supply	120 VAC 15 AMP 60 Hz Single Phase		
Shipping Weight	170.5 Lbs	_0	



60" SLIDE-IN COOKTOPS	
Surface Burner Rating	9,000 BTU (sm), 13,000 BTU (md), 17,000 BTU (lg)
Total Gas Connection Rating	ARSCT-6062GD 126,000 BTU 6 burners and double griddle
per model #	ARSCT-606X2GR 122,000 BTU 6 burners and double grill
	ARSCT-606GDGR 124,000 BTU 6 burners, griddle and grill
Gas Supply	7" W.C. Natural, 11" W.C. Propane
Gas Requirements	120 VAC 15 AMP 60 Hz Single Phase
Shipping Weight	212.5 Lbs



ACCESSORIES	24"	30"	36"	48"	60"
Island Back (Standard)	ARR-24SIB-L	ARR-30SIB-L	ARR-36SIB-L	ARR-48SIB-L	ARR-60SIB-L
Island Back (Welded)	ARR-24IB-L	ARR-30IB-L	ARR-36IB-L	ARR-48IB-L	ARR-60IB-L
4'' Stub Back	ARR-244SB-L	ARR-304SB-L	ARR-364SB-L	ARR-484SB-L	ARR-604SB-L
20" High Back with Shelf	ARR-2421HBS-L	ARR-3021HBS-L	ARR-3621HBS-L	ARR-4821HBS-L	ARR-6021HBS
12" Grill Cover	N/A	N/A	ARR-GRCOV12-L	ARR-GRCOV12-L	ARR-GRCOV12-L
12" Griddle Cover	N/A	N/A	ARR-GDCOV12-S-L	ARR-GDCOV12-S-L	ARR-GDCOV12-S-L
24" Griddle Cover	N/A	N/A	N/A	ARR-GDCOV24-S-L	ARR-GDCOV24-S-L
12" Removable Griddle Plate	N/A	N/A	ARR-PGP12-L	ARR-PGP12-L	ARR-PGP12-L
24" Removable Griddle Plate	N/A	N/A	ARR-PGP24-L	ARR-PGP24-L	ARR-PGP24-L
Cutting Board	ARR-CUTB-12-L	ARR-CUTB-12-L	ARR-CUTB-12-L	ARR-CUTB-12-L	ARR-CUTB-12-L
Wok Adapter	ARR-WOK-L	ARR-WOK-L	ARR-WOK-L	ARR-WOK-L	ARR-WOK-L

N= Natural Gas
 L= LP Gas
 Must provide N or L after model for type of gas needed.
 Example: AROFG-30L, represents unit to be built for LP gas.





LEGEND SERIES SLIDE-IN STEP-UP COOKTOPS









36''

24" 30"


24" SLIDE-IN STEP-UP 4 BURNER COOKTOP		
Surface Burner Rating	17,000 BTU (lg) - 13,000 BTU (md) - 9,000 BTU (sm)	Ī
Total Gas Connection Rating	ARSCT-244SU 56,000 BTU 4 burners	
Gas Supply	7" W.C. Natural, 11" W.C. Propane	
Electrical Supply	120 VAC 15 AMP 60 Hz Single Phase	
Shipping Weight	87 Lbs	
200 01 10 5 15 1 0750 1 10 4 0	NUMBER COOKTOR	Т



30" SLIDE-IN STEP-UP 4 BURNER COOKTOP		
Surface Burner Rating	17,000 BTU (lg) - 13,000 BTU (md) - 9,000 BTU (sm)	
Total Gas Connection Rating	ARSCT-304SU 56,000 BTU 4 burners	
Gas Supply	7" W.C. Natural, 11" W.C. Propane	
Electrical Supply	120 VAC 15 AMP 60 Hz Single Phase	
Shipping Weight	107 Lbs	



36" SLIDE-IN STEP-UP 6 BURNER COOKTOP		
Surface Burner Rating	17,000 BTU (lg) - 13,000 BTU (md) - 9,000 BTU (sm)	
Total Gas Connection Rating	ARSCT-366SU 86,000 BTU 6 burners	
Gas Supply	7" W.C. Natural, 11" W.C. Propane	
Electrical Supply	I 20 VAC I 5 AMP 60 Hz Single Phase	
Shipping Weight	131 Lbs	





SLIDE-IN STEP-UP COOKTOPS CUT-OUT DIMENSIONS

Island or peninsula installations - 10" min, clearance from back of range to combustible surface, Island trim 0" clearance to non-combustible surface. No side wall above cooking surface.

Electrical outlet - standard 3 prong 120 VAC. Allow for shut off valve at gas outlet. Island peninsula installations require a 10" minimum clearance from back of range to a combustible surface. No side wall above cooking surface.

© ■ Location of gas and electrical supply



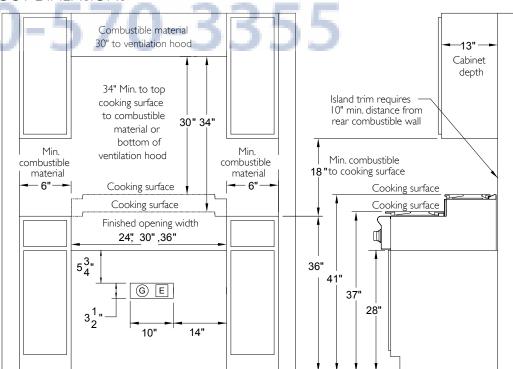

N= Natural Gas Must provide N or L after model for type of gas needed. L = LP Gas Example: AROFG-30L, represents unit to be built for LP gas.

Must specifiy elevation if over 1,000 ft. when ordering.

