

# HPCN36WS

## 36-INCH CHIMNEY WALL HOOD

PROFESSIONAL COLLECTION



### FEATURES & BENEFITS

- Professional Collection chimney wall hoods create a crafted, sculpted focal point
- Designed to complete the ultimate cooking system with Thermador ranges
- Powerfully Quiet® system accepts integral, inline, and remote blowers
- Commercial-style baffle filters
- Beautiful illumination with multi-level, vivid LED lights

### ACCESSORIES (OPTIONAL)

25 ft. Blower Connector Cable - EXTNCB25W

For use with the following inline and remote blowers: VTR2FZ, VT12FZ

Roofplates

RFPLT1000P - For use with 1000 CFM remote blower VTR2FZ

|                                     |            |
|-------------------------------------|------------|
| 6" Tall Duct Cover, 36" Wide        | CHMHP366W  |
| 18" - 35" Tall Duct Cover, 36" Wide | CHMHP36TW  |
| 42" - 59" Tall Duct Cover, 36" Wide | CHMHP36XTW |

Remote Control Panel

REMCPU - Ability to vertically install on cabinetry or wall to control hood in a convenient location



### GENERAL PROPERTIES

#### Features

Multi-Level LED Lights with Fading Transitions, Automatic Mode, Check Filter Reminder Light, Delay Shut-Off

|                               |                                |
|-------------------------------|--------------------------------|
| Operating Mode                | Ducted                         |
| Maximum CFM                   | Blower Sold Separately         |
| Number of Speed Settings      | 4-Stage                        |
| Motor Location                | Integral / Inline/ Remote      |
| Number of Lights              | 2                              |
| Bulb Type                     | LED                            |
| Light Lumens                  | 100 – 150                      |
| Light Color                   | 3500 – 4000 K                  |
| Total Power of the Lamps      | 2.4 W                          |
| Damper Included               | Yes                            |
| Grease Filter Material        | Aluminum                       |
| Grease Filter Type            | Commercial Style Baffle Filter |
| Home Connect® (Wi-Fi Enabled) | No                             |

### TECHNICAL DETAILS

|           |                     |
|-----------|---------------------|
| Watts     | See Chart on Page 3 |
| Current   | See Chart on Page 3 |
| Volts     | 120 V               |
| Frequency | 60 Hz               |
| Plug Type | Fixed Connection    |

### DIMENSIONS & WEIGHT

|                                                                 |                             |
|-----------------------------------------------------------------|-----------------------------|
| Overall Appliance Dimensions (Width of Canopy Included) (HxWxD) | 18" x 35 15/16" x 24"       |
| Height of the Chimney                                           | Duct Covers Sold Separately |
| Minimum Distance Above Gas / Electric Cooking Surface           | 30" / 30"                   |
| Diameter of Air Duct Top                                        | 10"                         |
| Net Weight                                                      | 70 lbs                      |

### BLOWER OPTIONS

|                                                           |                   |
|-----------------------------------------------------------|-------------------|
| Remote Blower (Mounted to Roof or External Wall)          | VTR2FZ – 1000 CFM |
| Inline Blower (Mounted Between Kitchen and External Wall) | VT12FZ – 1000 CFM |
| Integrated Blower (Mounted in Hood)                       | VTN2DA – 700 CFM  |
|                                                           | VTN2FZ – 1000 CFM |

### WARRANTY

|                                  |        |
|----------------------------------|--------|
| Limited Warranty Parts and Labor | 2 Year |
|----------------------------------|--------|


# HPCN36WS

## 36-INCH CHIMNEY WALL HOOD

PROFESSIONAL COLLECTION




### HOOD DIMENSIONS

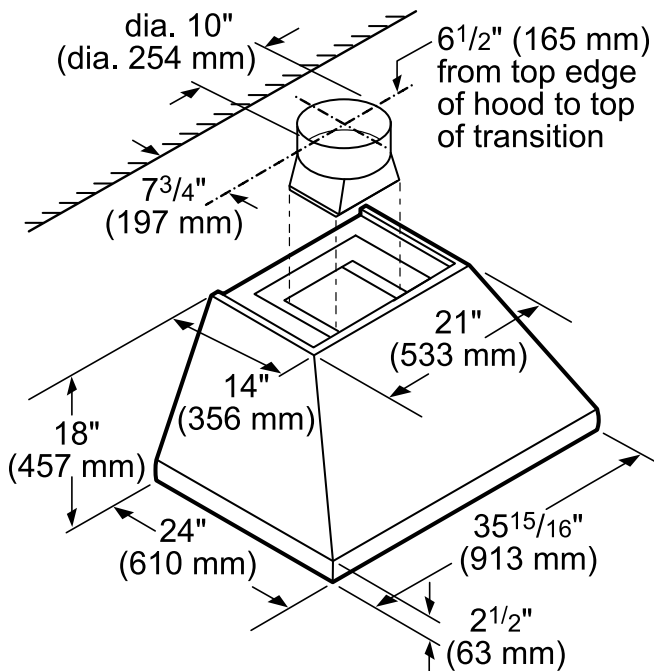

### OPTIONAL ACCESSORIES

#### 6" TALL DUCT COVER CHMHP366W

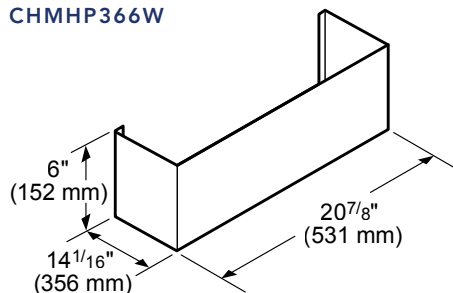


Standard duct cover for up to 8-foot ceiling heights



#### 18" – 35" TALL TELESCOPING DUCT COVER CHMHP36TW

Telescoping design for extension up to 9-foot to 10-foot ceiling heights



#### 42" – 59" TALL TELESCOPING DUCT COVER CHMHP36XTW

Telescoping design for extension up to 11-foot to 12-foot ceiling heights

### REMOTE CONTROL PANEL REMCPW



Convenience at your fingertips: The remote control accessory offers the freedom to extend your hood controls to a more reachable spot




HPCN36WS
36-INCH CHIMNEY WALL HOOD
PROFESSIONAL COLLECTION



|          |       | ELECTRIC LOAD (120V, 60HZ) |               |                   |        |
|----------|-------|----------------------------|---------------|-------------------|--------|
|          |       | Remote Blower              | Inline Blower | Integrated Blower |        |
|          |       | VTR2FZ                     | VTI2FZ        | VTN2DA            | VTN2FZ |
| HPCN36WS | Amps  | 10.3                       | 10.3          | 7.5               | 8.7    |
|          | Watts | 1,236                      | 1,236         | 900               | 1,044  |

REMOTE BLOWERS (MOUNTED TO ROOF OR EXTERNAL WALL)


VTR2FZ – 1000 CFM

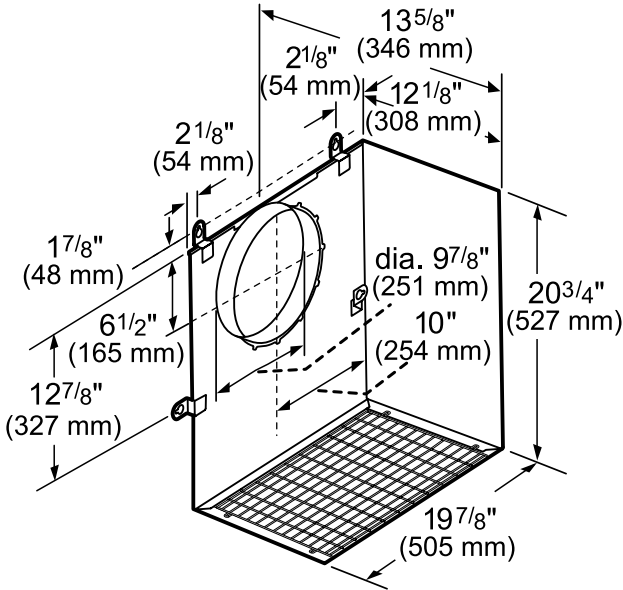

measurements in inches and mm

INLINE BLOWERS (MOUNTED BETWEEN KITCHEN AND EXTERNAL WALL)

VTI2FZ – 1000 CFM

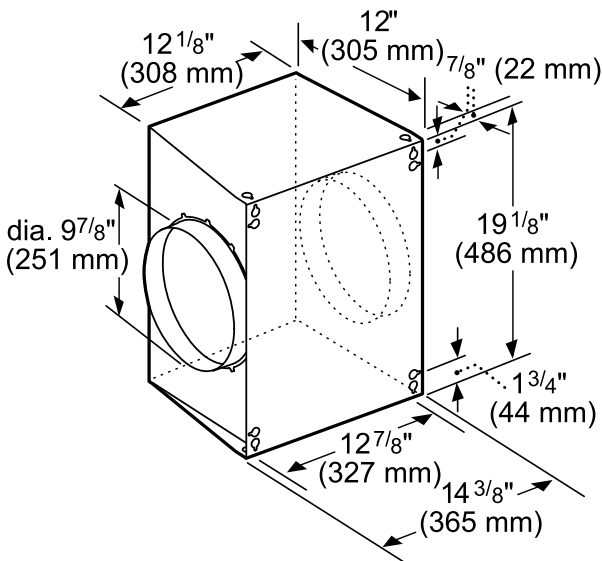

measurements in inches and mm


HPCN36WS  
36-INCH CHIMNEY WALL HOOD  
PROFESSIONAL COLLECTION



INTEGRATED BLOWERS (MOUNTED IN HOOD)


VTN2DA – 700 CFM

Measurements in inches (mm)

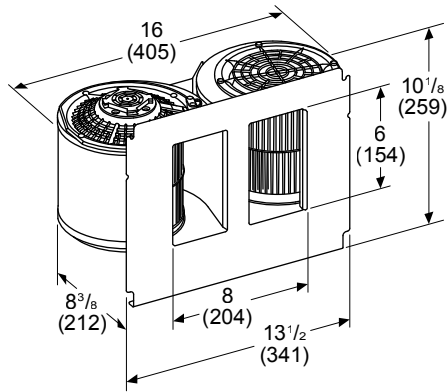

VTN2FZ – 1000 CFM

Measurements in inches (mm)

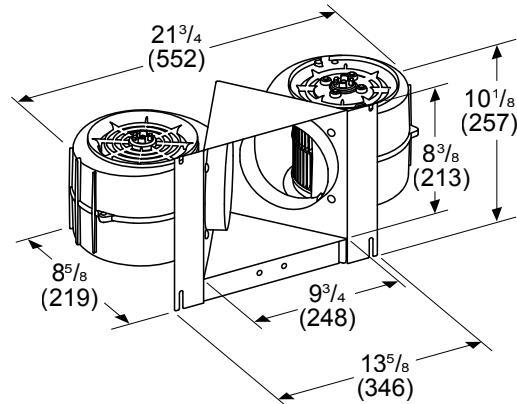


HVI PERFORMANCE VALUES


| HPCN36WS WITH BLOWER VTN2FZ |                                 |               |            |               |            |               |            |               |
|-----------------------------|---------------------------------|---------------|------------|---------------|------------|---------------|------------|---------------|
| Exhaust                     | Pressure (in. H <sub>2</sub> O) |               | Power (W)  |               | CFM        |               | Sones      |               |
|                             | High Speed                      | Working Speed | High Speed | Working Speed | High Speed | Working Speed | High Speed | Working Speed |
| Vertical                    | 0.1                             | 0.017         | 7.08       | 3.23          | 940        | 370           | 14.5       | 3.0           |

REMOTE BLOWER ACCESSORIES

ROOFPLATE – RFPLT600P

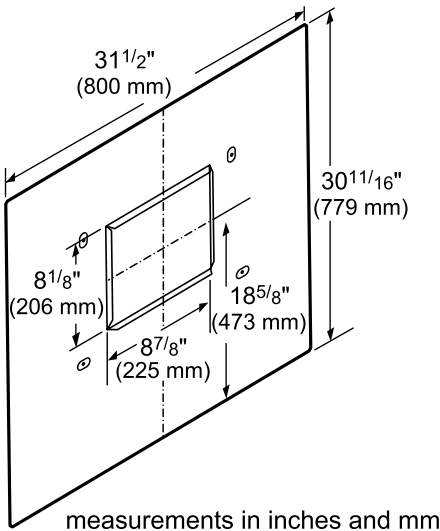

ROOFPLATE – RFPLT1000P

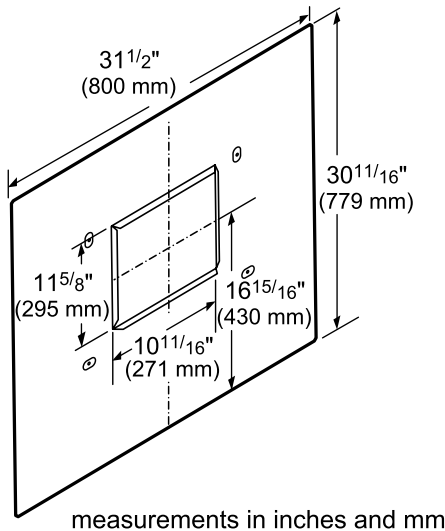

EXTNCB25W

For use with the following Inline and Remote Blowers: VTR2FZ, VT12FZ

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of delivery. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.