

## DAP 1727

### 30-inch wall-mounted ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.



- Timeless design – stainless steel canopy 29 1/2 (748) in (mm) wide
- Powerful – 512 cfm in Booster level
- Efficient filtration- 10-ply stainless steel grease filters
- Safe and easy to clean – Miele CleanCover
- Suitable for every home – vented or recirculating

EAN: 4002516878872 / Material number: 12784040 /  
Old Material Number: 28P1727SUSA

#### Construction type and design

Appliance colour Stainless steel

#### Design

Wall ventilation hood •

#### Operating modes

Recirculated mode Can be retrofitted

Recirculation conversion kit (order separately) DUW 20

#### User convenience

Electronic controls •

EasySwitch •

Operation EasySwitch

Power levels (number excl. Intensive) 3

Booster levels 1

Programmable Intensive switch-off •

#### Cleaning convenience

Easy-to-clean canopy interior – CleanCover •

#### Filter system

Number of dishwasher-safe stainless steel grease filters (10-ply) 2

#### Lighting

Number x W 2 x 3 W

Light intensity in Lx 330 lx

Color temperature in K 3000 Kelvin

#### Blower

Dual-action blower •

AC motor •

#### Safety

Safety shut-off •

#### Technical data

Overall hood height for vented mode and external in inches (mm) 27 (685)–39 9/16 (1005)

Overall height for recirculation mode ventilation hoods in mm 32 1/16 (815)–44 11/16 (1135)

Overall min. height for vented and external in in. (mm) 27 (685)

Canopy width in in.(mm) 29 7/16 (748)

Overall max. height for vented and external in in. (mm) 39 9/16 (1005)

Canopy height in in.(mm) 2 7/16 (62)

Overall min. height for recirculation in in. (mm) 32 1/16 (815)

Canopy depth in in.(mm) 19 11/16 (500)

Overall max. height for recirculation in in. (mm) 44 11/16 (1135)

Net weight in lbs. (kg) 51 (23.0)

Length of electrical wire in ft (m) 4 (1.5)

Standard plug fitted •

Minimum height above electric cooktops in mm 24 (610)

Minimum safety distance above gas cooktops (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm 26 (660)

DAP 1727

30-inch wall-mounted ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.



EAN: 4002516878872 / Material number: 12784040 /  
Old Material Number: 28P1727SUSA

|                            |      |
|----------------------------|------|
| Number of phases           | 1    |
| Total connected load in kW | 0.35 |
| Voltage in V               | 120  |
| Fuse rating in A           | 15   |
| Frequency in Hz            | 60   |

#### Installation note

|  |         |
|--|---------|
| Vent connection at top                 | •       |
| Vent connection at top and rear        | •       |
| Diameter of vent connection in in.(mm) | 6 (150) |
| Telescopic chimney                     | •       |


#### Standard accessories

|                 |   |
|-----------------|---|
| Non-return flap | • |
|-----------------|---|

## DAP 1727

30-inch wall-mounted ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.

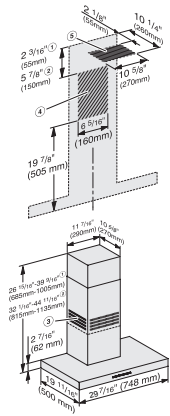

PUR88W, DAP1727 (Installation drawing) – USA/CDN

1) Extraction, 2) Recirculation, 3) Ventilation grille at top for recirculation, 4+5) Installation cut-out (5 not required for recirculation)