


# MXZ-2C20NA4 1.66-TON MULTI-ZONE INVERTER HEAT-PUMP SYSTEM



Job Name:

System Reference:

Date:

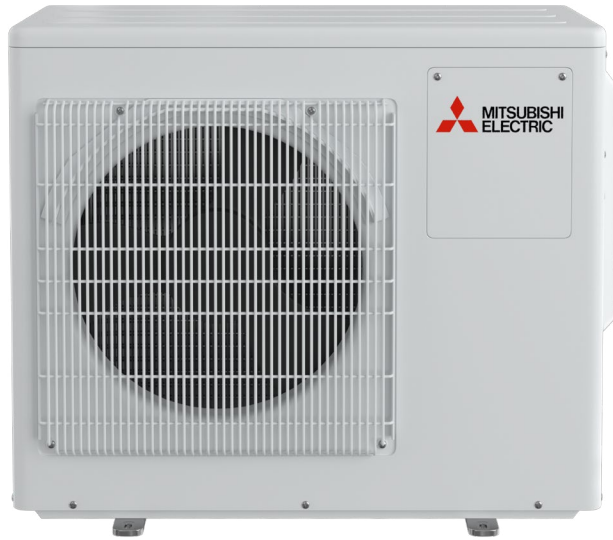

## FEATURES

- Variable speed INVERTER-driven compressor
- M-NET connection through the outdoor unit
- Quiet outdoor unit operation as low as 50 dB(A)
- Intelligent Power Module (IPM) for reduced power loss
- Selectable thermal lockout/restart function
- Optional base pan heater
- High-pressure switch for additional protection
- A thermal differential of +/-1° F from setpoint
- Blue Fin anti-corrosion treatment applied to the outdoor unit heat exchanger for increased coil protection and longer life
- Rated for 2,000 hours spraying time per ASTM B117 Standard

ENERGY STAR products are third-party certified by an EPA-recognized Certification Body.

Specifications are subject to change without notice.

© 2023 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.

# SPECIFICATIONS: MXZ-2C20NA4

Cooling <sup>1</sup> (Non-Ducted // Mix (Mid-static) // Ducted (Mid-static)   Mix (High-static) // Ducted (High-static))	Maximum Capacity	BTU/H	20,000 // 21,000 // 22,000   20,000 // 20,000	
	Rated Capacity	BTU/H	18,000 // 19,000 // 20,000   19,000 // 20,000	
	Minimum Capacity	BTU/H	5,700 // 5,700 // 5,700   6,550 // 7,400	
	Maximum Power Input	W	2,245 // 2,258 // 2,270   2,258 // 2,270	
	Rated Power Input	W	1,417 // 1,709 // 2,000   1,709 // 2,000	
	Power Factor (208V, 230V)	%	99.0, 99.0 // 99.0, 99.0 // 99.0, 99.0   99.0, 99.0 // 99.0, 99.0	
Heating at 47°F <sup>2</sup> (Non-Ducted // Mix (Mid-static) // Ducted (Mid-static)   Mix (High-static) // Ducted (High-static))	Maximum Capacity	BTU/H	25,500 // 25,000 // 24,500   25,000 // 24,500	
	Rated Capacity	BTU/H	22,000 // 22,000 // 22,000   22,000 // 22,000	
	Minimum Capacity	BTU/H	7,400 // 7,400 // 7,400   9,450 // 11,500	
	Maximum Power Input	W	2,455 // 2,433 // 2,410   2,433 // 2,410	
	Rated Power Input	W	1,641 // 1,706 // 1,771   1,706 // 1,771	
	Power Factor (208V, 230V)	%	99.0, 99.0 // 99.0, 99.0 // 99.0, 99.0   99.0, 99.0 // 99.0, 99.0	
Heating at 17°F <sup>3</sup> (Non-Ducted // Mix (Mid-static) // Ducted (Mid-static)   Mix (High-static) // Ducted (High-static))	Maximum Capacity	BTU/H	15,500 // 15,000 // 14,500   15,000 // 14,500	
	Rated Capacity	BTU/H	13,500 // 13,000 // 12,500   13,000 // 12,500	
	Maximum Power Input	W	1,750 // 1,780 // 1,810   1,780 // 1,810	
	Rated Power Input	W	1,364 // 1,515 // 1,665   1,515 // 1,665	
	Maximum Capacity	BTU/H	11,100 // 11,000 // 10,900   11,000 // 10,900	
Heating at 5°F <sup>4</sup> (Non-Ducted // Mix (Mid-static) // Ducted (Mid-static)   Mix (High-static) // Ducted (High-static))	Maximum Capacity	BTU/H	11,100 // 11,000 // 10,900   11,000 // 10,900	
	Maximum Power Input	W	1,600 // 1,650 // 1,700   1,650 // 1,700	
	SEER2		20.0 // 18.0 // 16.0   18.0 // 16.0	
	EER2 <sup>1</sup>		12.7 // 11.35 // 10.0   11.35 // 10.0	
	HSPF2 (IV)		9.7 // 9.4 // 9.1   11.0 // 9.1	
	COP at 47°F <sup>2</sup>		3.92 // 3.78 // 3.64   3.78 // 3.64	
Efficiency (Non-Ducted // Mix (Mid-static) // Ducted (Mid-static)   Mix (High-static) // Ducted (High-static))	COP at 17°F at Maximum Capacity <sup>3</sup>		2.6 // 2.48 // 2.35   2.48 // 2.35	
	COP at 5°F at Maximum Capacity <sup>4</sup>		2.22 // 2.05 // 1.88   2.05 // 1.88	
	ENERGY STAR® Certified		Yes // No // No   No // No	
	Electrical	Electrical Power Requirements	Voltage, Phase, Frequency	208/230, 1, 60
		Guaranteed Voltage Range	V AC	187-253
		Voltage: Indoor - Outdoor, S1-S2	V AC	208/230
Voltage: Indoor - Outdoor, S2-S3		V DC	24	
Short-circuit Current Rating (SCCR)		kA	5	
Recommended Fuse/Breaker Size		A	20	
Recommended Wire Size (Indoor - Outdoor)		AWG	14	
Minimum Circuit Ampacity		A	17.2	
Maximum Overcurrent Protection		A	20	
Fan Motor Full Load Amperage		A	1.77	
Outdoor unit	Airflow Rate (Cooling / Heating)	CFM	1,342 / 1,458	
	Refrigerant Control		LEV	
	Defrost Method		Reverse Cycle	
	Heat Exchanger Type		Plate Fin Coil	
	Heat Exchanger Coating		Blue Fin Coating	
	Sound Pressure Level, Cooling <sup>1</sup>	dB(A)	50	
	Sound Pressure Level, Heating <sup>2</sup>	dB(A)	54	
	Compressor Type		DC INVERTER-driven Twin Rotary	
	Compressor Model		SNB140FQUH2T	
	Compressor Rated Load Amps	A	10.7	
	Compressor Locked Rotor Amps	A	15.5	
	Compressor Oil Type // Charge	oz.	NEO22 // 20.3	
	Base Pan Heater		Optional	
	Unit Dimensions	W: In. [mm]		33-1/16 [840]
		D: In. [mm]		13 [330]
		H: In. [mm]		27-15/16 [710]
	Package Dimensions	W: In. [mm]		40 [1,006]
		D: In. [mm]		18-1/2 [466]
		H: In. [mm]		35-1/8 [892]
	Unit Weight	Lbs.[kg]		126 [57]
Package Weight	Lbs.[kg]		150 [68]	
Outdoor unit operating temperature range	Cooling Intake Air Temp (Maximum / Minimum <sup>5</sup> )	°FDB	115 / 14	
	Cooling Thermal Lock-out / Re-start Temperatures	°FDB	10.4 / 14	
	Heating Intake Air Temp (Maximum / Minimum)	°FWB	65 / 5	
	Heating Thermal Lock-out / Re-start Temperatures	°FDB	-4 / 5	

**NOTES:**

AHRI Rated Conditions <sup>1</sup>Cooling (Indoor // Outdoor) °F 80 DB, 67 WB // 95 DB, 75 WB  
 (Rated data is determined at a fixed compressor speed) <sup>2</sup>Heating at 47°F (Indoor // Outdoor) °F 70 DB, 60 WB // 47 DB, 43 WB  
<sup>3</sup>Heating at 17°F (Indoor // Outdoor) °F 70 DB, 60 WB // 17 DB, 15 WB

Conditions <sup>4</sup>Heating at 5°F (Indoor // Outdoor) °F 70 DB, 60 WB // 5 DB, 4 WB

\*Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

<sup>5</sup>A 5°F DB - 115°F DB when optional wind baffles are installed

For actual capacity performance based on indoor unit type and number of indoor units connected, please refer to MXZ Operational Performance.

Although the maximum connectable capacity is 130%, the outdoor unit cannot provide more than 100% of the rated capacity. Please utilize this over capacity capability for load shedding or applications where it is known that all connected units will NOT be operating at the same time.

Low, mid and high external static pressure tests conducted at 0.1, 0.3 and 0.5 in.w.g. respectively, according to AHRI 210/240. The external static pressures utilized have no bearing on the capabilities of the indoor unit; please refer to the indoor unit manual to select the correct external static pressure setting for the application.

# SPECIFICATIONS: MXZ-2C20NA4

	Type		R410A
Refrigerant	Pre-Charged Refrigerant Amount	Lbs, oz	5.0, 15.0
	Maximum Pre-Charged Piping Length	Ft. [m]	131.0 [40.0]
	Additional Refrigerant Charge Per Additional Piping Length	oz./Ft. [g/m]	0.216 [20]
Indoor unit connection	Maximum Number of Connected IDU		2
	Minimum Number of Connected IDU		2
	Minimum connected capacity	BTU/H	12,000
	Maximum connected capacity	BTU/H	24,000
Piping	Liquid Pipe Size O.D. (Flared)	In.[mm]	A,B: 1/4 [A,B: 6.35]
	Gas Pipe Size O.D. (Flared)	In.[mm]	A,B: 3/8 [A,B: 9.52]
	Total Piping Length	Ft. [m]	164 [50]
	Maximum Height Difference, ODU above IDU	Ft. [m]	33 [10]
	Maximum Height Difference, ODU below IDU	Ft. [m]	49 [15]
	Farthest Piping Length from ODU to IDU	Ft. [m]	82 [25]
	Maximum Number of Bends for IDU		50

**NOTES:**

AHRI Rated Conditions <sup>1</sup>Cooling (Indoor // Outdoor) °F 80 DB, 67 WB // 95 DB, 75 WB  
 (Rated data is determined at a fixed compressor speed) <sup>2</sup>Heating at 47°F (Indoor // Outdoor) °F 70 DB, 60 WB // 47 DB, 43 WB  
<sup>3</sup>Heating at 17°F (Indoor // Outdoor) °F 70 DB, 60 WB // 17 DB, 15 WB

Conditions <sup>4</sup>Heating at 5°F (Indoor // Outdoor) °F 70 DB, 60 WB // 5 DB, 4 WB

<sup>5</sup>Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

<sup>6</sup>A 5°F DB - 115°F DB when optional wind baffles are installed


For actual capacity performance based on indoor unit type and number of indoor units connected, please refer to MXZ Operational Performance.

Although the maximum connectable capacity is 130%, the outdoor unit cannot provide more than 100% of the rated capacity. Please utilize this over capacity capability for load shedding or applications where it is known that all connected units will NOT be operating at the same time.


Low, mid and high external static pressure tests conducted at 0.1, 0.3 and 0.5 in.w.g. respectively, according to AHRI 210/240. The external static pressures utilized have no bearing on the capabilities of the indoor unit; please refer to the indoor unit manual to select the correct external static pressure setting for the application.

# OUTDOOR UNIT DIMENSIONS: MXZ-2C20NA4



Unit: inch (mm)

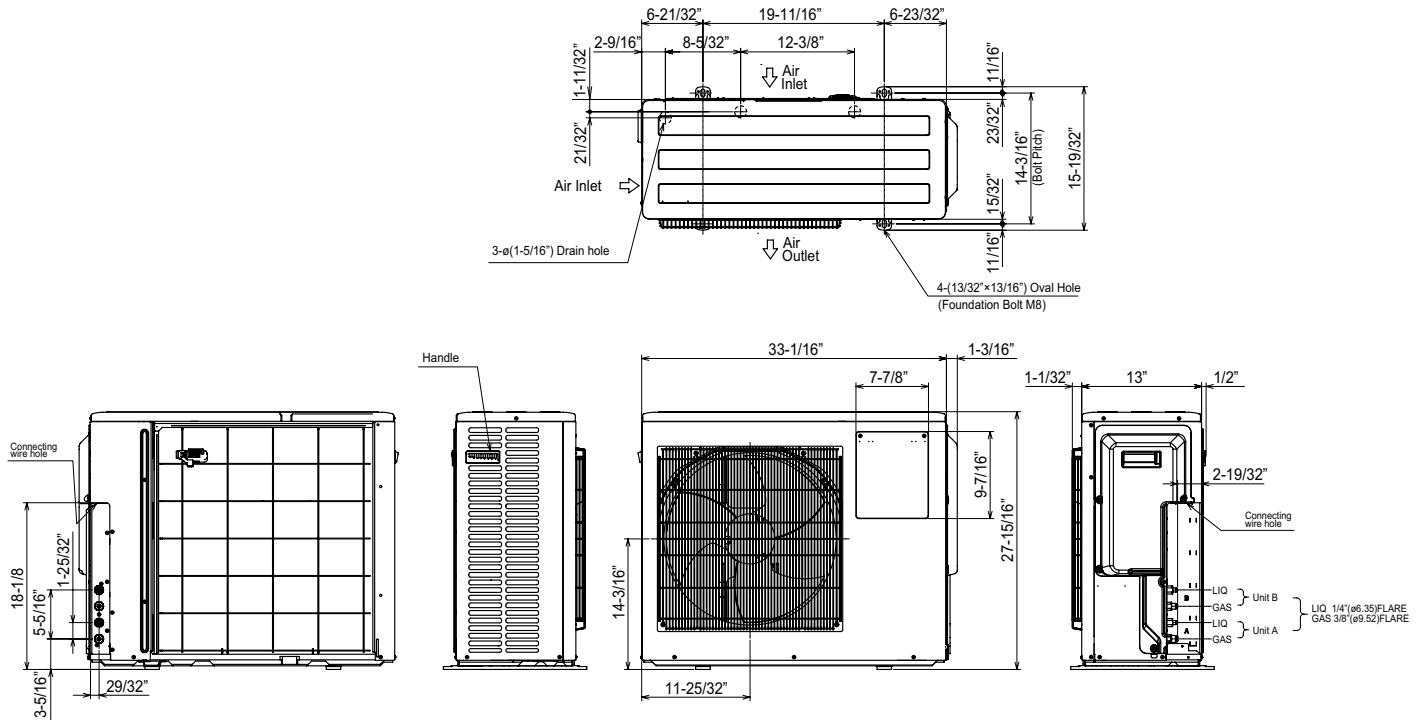

## 1. FREE SPACE

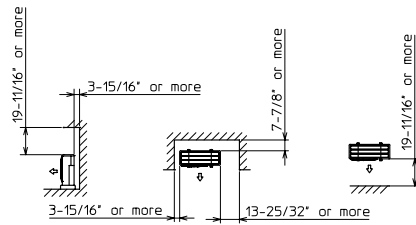

## 2. SERVICE SPACE

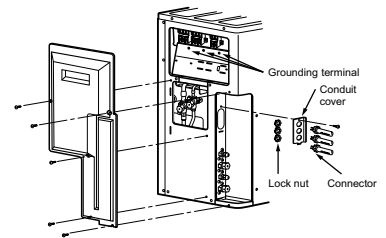

1340 Satellite Boulevard Suwanee, GA 30024  
Toll Free: 800-433-4822 www.mehvac.com

FORM# MXZ-2C20NA4 - 202311

