PCOR₃₀




Over the Range Convection Microwave Oven

Deflector

PLANNING GUIDE

15 1/4" (387mm)

16 1/4" (413mm)

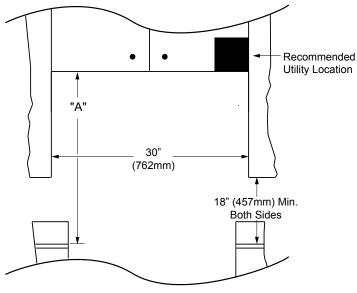

092105



"A" - From Top of PCOR30 to Finished Countertop 34" (864mm) Minimum with deflector for a maximum cooktop surface BTU rating of 44,000 BTU's. 36" (914mm) Minimum without deflector for a maximum cooktop surface BTU rating of 44,000 BTU's. 36" (914mm) Minimum with deflector for a maximum cooktop surface BTU rating of 60,000 BTU's.

(Upper Cabinets 13" (330mm) Maximum Depth)

Equal — Equal — 4" (102mm) 3 1/4" x 10" (89mm x 254mm) Direct Connection

1/1

29 15/16! (761mm)

MICROWAVE TOP VIEW EXHAUST LOCATION

NOTES:

- 30" electric cooktops or ranges can be installed at 34" (864mm) with deflector or 36" (914mm) without deflector for a maximum cooktop surface rating of 10,000 watts.
- 2. Microwave is supplied with a 48" (1219mm) power cord, with a three prong grounded plug.

Model No.	Dedicated Circuit Required	Total Connected Load	Approximate Shipping Weight
PCOR30	120VAC, 60Hz, 15A (Breaker)	1.56kW (13A)	84 lbs.

Web: http://www.dacor.com Corporate Phone: 800-793-0093