

PGS920SEF


GE Profile™ Series 30" Slide-In Gas Range with Warming Drawer

Dimensions and Installation Information (in inches)

Note: Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

Note: Cabinets installed adjacent to slide-in ranges must have an adhesion spec of at least 194° temperature rating.


Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

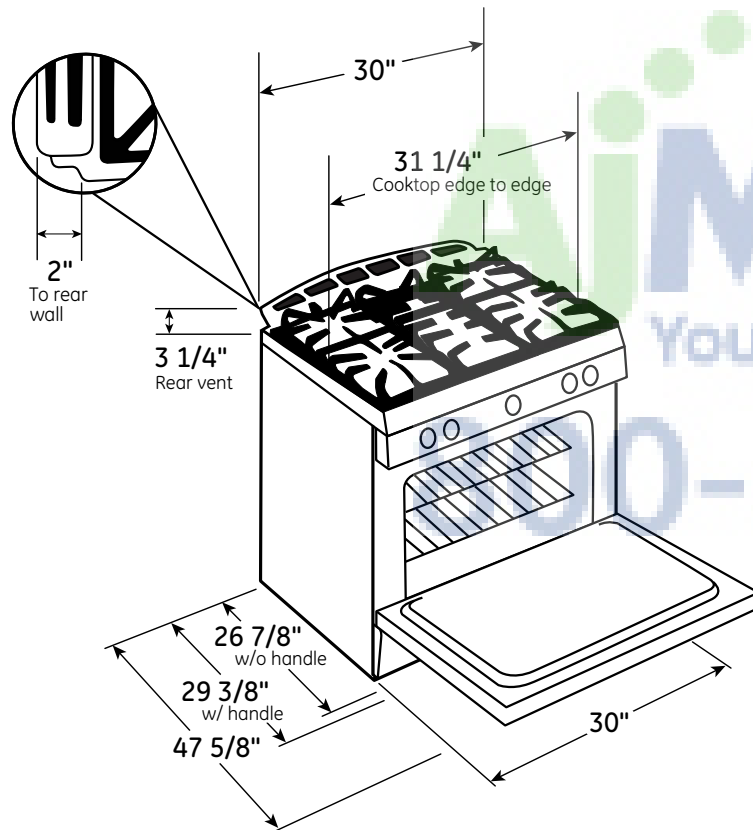

GAS PIPE AND ELECTRICAL OUTLET LOCATIONS

Recommended area for 120V outlet on rear wall and area for through-the-wall connection of pipe stub and shut-off valve.

Recommended area for through-the-floor connection of pipe stub and shut-off valve.

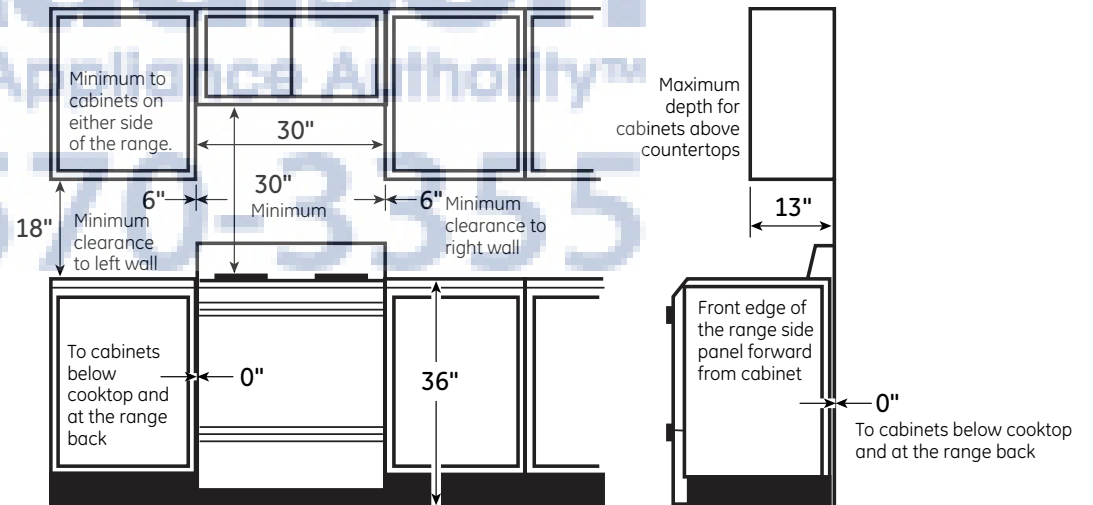

imagination at work

For answers to your Monogram® or GE® appliance questions, visit our website at geappliances.com or call GE Answer Center® service, 800.626.2000.



an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.



Specification Revised 9/14

PGS920SEF

GE Profile™ Series 30" Slide-In Gas Range with Warming Drawer

Features and Benefits

- 20,000 BTU tri-ring burner - Offers the flexibility of three different burners
- Center oval burner - Large oval fifth burner is ideal for griddle or odd-size cookware
- Reversible cast-iron griddle/grill - Two great ways to cook
- Stainless steel, deep recessed cooktop - Contains spills for quick and easy cleaning
- Self-clean heavy-duty roller rack - Easily access items with a rack that glides smoothly
- Precise simmer burner - Delicate foods don't burn with low, even heat
- Gas convection oven - Circulates heat for high-quality results
- Model PGS920SEFSS - Stainless steel



imagination at work

Specification Revised 9/14