



CI 481 612

Stainless steel frame

Width 30" (80 cm)

#### Included accessory

1 adjustment strip 29½" - 30¾"

#### Optional accessories

GP 900 001

Stainless steel frying pan

Non-stick coating, for ø 6" cooking zone.

GP 900 003

Stainless steel frying pan

Non-stick coating, for ø 8" cooking zone.

#### Induction cooktop

CI 481

- Sturdy stainless steel frame
- Frying sensor function
- Twist-Pad control with removable magnetic knob

#### Cooking zones

1 induction cooking zone ø 11" (2,400 W, with booster 3,600 W).

1 induction cooking zone ø 8" (2,200 W, with booster 3,300 W).

2 induction cooking zones ø 6" (1,400 W, with booster 1,800 W).

#### Handling

Twist-Pad control with removable magnetic knob.

Cooking zone marking.

Electronic power control in 17 output levels.

#### Functions

Frying sensor function for ø 6" and ø 8" cooking zones.

Booster function for each cooking zone.

Quick boil timer, with individually adjustable boiling time.

Cooking timer for up to 90 minutes.

Short-term timer.

Memory function.

Options menu.

Power management.

#### Safety

Main switch.

Operation indication.

Pan detection.

Individual residual heat indication.

Child lock.

Safety lock.

#### Planning notes

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

The wok pan WP 400 001 cannot be used with this appliance.

Doesn't operate without Twist-Pad knob.

Immersion depth 2¼".

Intermediate shelf is recommended.

Appliance must be fixed from underneath.

Hard wire required.

Cooktop clamping range: 13⅛" - 19⅛".

Please read the installation details regarding air ducting on page 78.


#### Rating

Connecting cable 60" without plug.

Total rating: 7.2 kW

Total Amps: 30 Amps

220 - 240 V / 60 Hz

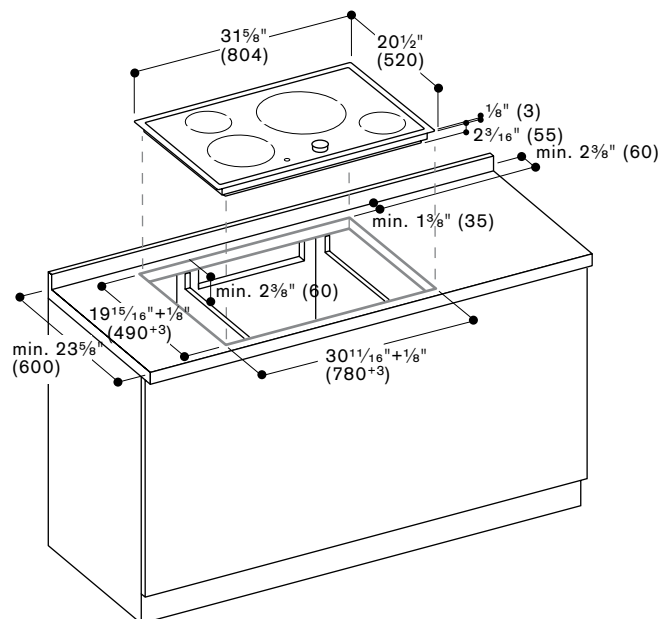

Numbers indicated  
inside parenthesis ( ) = mm