



CI 491 612  
Stainless steel frame  
Width 36" (90 cm)

**Optional accessories**  
**GP 900 002**  
Stainless steel frying pan  
Non-stick coating, for ø 7" cooking zone.  
**GP 900 003**  
Stainless steel frying pan  
Non-stick coating, for ø 8" cooking zone.

## Induction cooktop CI 491

- Sturdy stainless steel frame
- Frying sensor function
- Super booster function for the 11" cooking zone with 4.4 kW
- Twist-Pad control with removable magnetic knob

### Cooking zones

1 induction cooking zone ø 7" (1,800 W, with booster 2,500 W), automatically switches to ø 11" (2,800 W, with booster 4,400 W).  
1 induction cooking zone ø 8" (2,200 W, with booster 3,300 W).  
2 induction cooking zones ø 7" (1,800 W, with booster 2,500 W).  
1 induction cooking zone ø 6" (1,400 W, with booster 1,800 W).

### Handling

Twist-Pad control with removable magnetic knob.  
Cooking zone marking.  
Electronic power control in 17 output levels.

### Functions

Frying sensor function for ø 7" and ø 8" cooking zones.  
Booster function for each cooking zone.  
Super booster function for ø 11" cooking zone.  
Quick boil timer, with individually adjustable boiling time.  
Cooking timer for up to 90 minutes.  
Short-term timer.  
Memory function.  
Options menu.  
Power management.

### Safety

Main switch.  
Operation indication.  
Pan detection.  
Individual residual heat indication.  
Child lock.  
Safety lock.


### Planning notes

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.  
The wok pan WP 400 001 cannot be used with this appliance.  
Doesn't operate without Twist-Pad knob.  
Immersion depth 2¼".  
Appliance must be fixed from underneath.  
Hard wire required.  
Cooktop clamping range: 1¾" - 1⅞".

Please read the installation details regarding air ducting on page 78.

### Rating

Connecting cable 60" without plug.  
Total rating: 10.8 kW  
Total Amps: 45 Amps  
220 - 240 V / 60 Hz

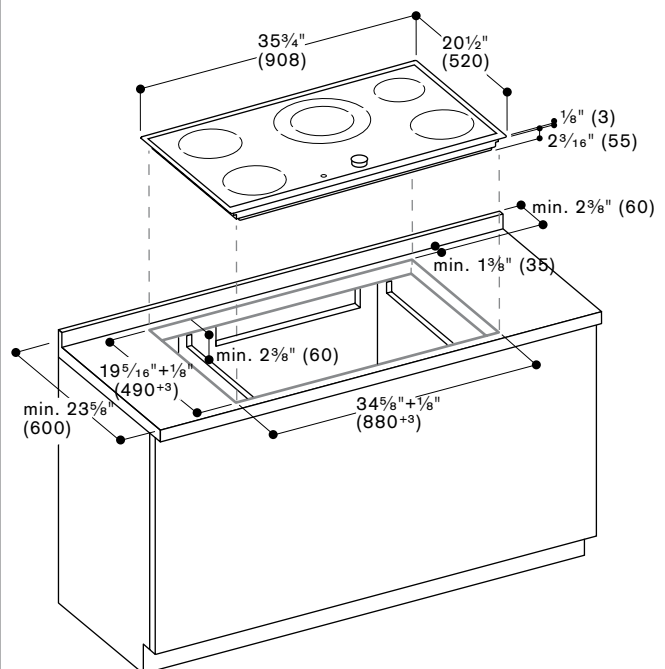

Numbers indicated  
inside parenthesis ( ) = mm