

BERTAZZONI PROFESSIONAL SERIES

UNDERMOUNT AND WALLMOUNT HOOD, 1 MOTOR



AjMadison
Your Appliance Authority™

The single-motor canopy hoods deliver extraction power up to 600 CFM with three different power settings. They come equipped with aluminum mesh filters or optional baffle filters, all easily removable and dishwasher safe. They can be installed under a cabinet or on the wall with an optional narrow or wide duct cover. The design matches Bertazzoni Professional Series ranges and cooktops while also complementing other Bertazzoni Series.



Single-motor canopy hood shown with optional Narrow Duct Cover



Single-motor canopy hood shown with optional Full Width Duct Cover



THE INTEGRATED KITCHEN

BERTAZZONI PROFESSIONAL SERIES

48" UNDERMOUNT AND WALLMOUNT HOOD, 1 MOTOR
36" UNDERMOUNT AND WALLMOUNT HOOD, 1 MOTOR

Range Hood 48
KU48 PRO 1 X

Range Hood 36
KU36 PRO 1 X

Motor	1	1
Electronic control	1	1
Halogen lights	2	2
Filters	aluminium mesh ¹⁾	aluminium mesh ¹⁾

Dimensions

Width	48"	36"
Depth	12" - 18 5/8"	12" - 18 5/8"
Height	10 1/8"	10 1/8"
Total Height (incl. duct cover)	32 1/4" - 52 1/4"	32 1/4" - 52 1/4"
Distance from worktop	25 1/2" - 31 1/2"	25 1/2" - 31 1/2"
Motor power	600 cfm	600 cfm
Electrical requirements	120V - 60Hz	120V - 60Hz
Max. Amp. usage	3.3 A	3.3 A
Certification	cETLus	cETLus

All KU hoods can be installed under 12" deep wall cabinets or with the optional height-adjustable narrow and large duct covers.

Recirculation Kit (Item 901154) can be installed in combination with the narrow Duct Cover (Item 901262), and full width Duct Cover (Item 901261 for 48"; Item 901265 for 36"). Duct Cover for ceiling height 8-10 ft (item 901281).

¹⁾ Optional: European Baffle Filter available (item 401273 - 4 filters for KU48, 3 filters for KU36)

BERTAZZONI PROFESSIONAL SERIES

30" UNDERMOUNT AND WALLMOUNT HOOD, 1 MOTOR
24" UNDERMOUNT AND WALLMOUNT HOOD, 1 MOTOR

Range Hood 30
KU30 PRO 1 X

Range Hood 24
KU24 PRO 1 X

Motor	1	1
Electronic control	1	1
Halogen lights	2	2
Filters	aluminium mesh ¹⁾	aluminium mesh ¹⁾


Dimensions

Width	30"	24"
Depth	12" - 18 5/8"	12" - 18 5/8"
Height	10 1/8"	10 1/8"
Total Height (incl. duct cover)	32 1/4" - 52 1/4"	32 1/4" - 52 1/4"
Distance from worktop	25 1/2" - 31 1/2"	25 1/2" - 31 1/2"
Motor power	600 cfm	600 cfm
Electrical requirements	120V - 60Hz	120V - 60Hz
Max. Amp. usage	3.3 A	3.3 A
Certification	cETLus	cETLus

All KU hoods can be installed under 12-inch deep wall cabinets or with the optional height-adjustable narrow and large duct covers.

Recirculation Kit (Item 901154) can be installed in combination with the narrow Duct Cover (Item 901262) and full width Duct Cover (Item 901266 for 30"). Duct Cover for ceiling height 8-10 ft (item 901281).

¹⁾ Optional: European Baffle Filter available (item 402432 for KU30 - 3 filters, item 401273 for KU24 - 2 filters)

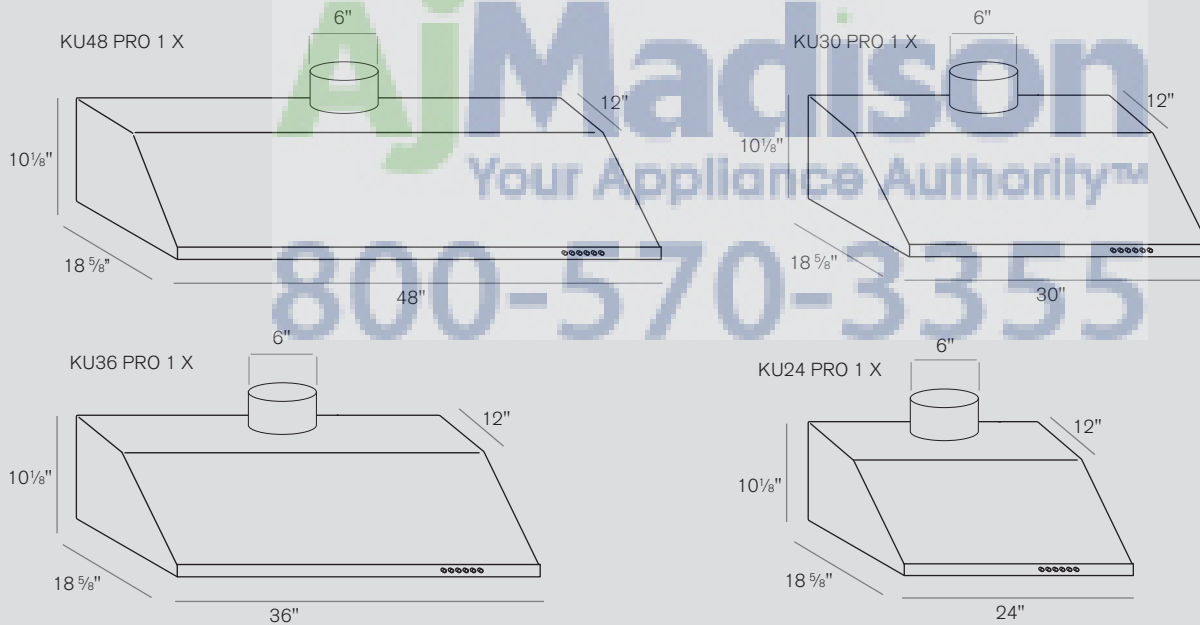

ACCESSORIES

901253 Kit Baffle Filters

for KU24 KU36 KU48 PRO


contains: 4 filters suitable for all 3 hood sizes all lines; KU24 requires 2, KU36 requires 3, KU48 requires 4

901252 Kit Baffle Filters for KU30 PRO

contains: 3 filters for KU30 PRO

901262 Narrow Duct Cover

for KU48 PRO 1 X - KU36 PRO 1 X
KU30 PRO 1 X - KU24 PRO 1 X

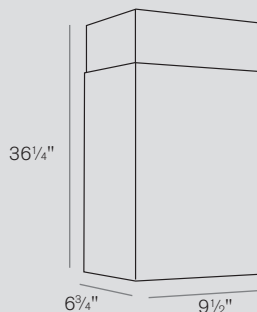

901261 Large Duct Cover

for KU48 PRO 1 X

901265 Large Duct Cover

for KU36 PRO 1 X

901266 Large Duct Cover

for KU30 PRO 1 X

