

PureLine  
30" Convection Oven

H 6680 BP



# PureLine 30" Convection Oven H 6680 BP



## H 6680 BP

### Features:

- SensorTronic controls: 5-line TFT display with laterally positioned sensor controls that clearly present menu content
- Self Clean Oven
- 18 Operating Modes
- Rapid PreHeat
- MasterChef menu offers over 100 food types to cook to perfection
- Roast Probe for perfect roasting results
- Favorites — up to 20 recipes
- Sabbath Program
- CleanGlass Door
- Timer
- TwinPower Fans provide optimum and even distribution of hot air
- Soft Open and Soft Close for an easier handling
- The simple yet sleek Silhouette handle seems to float enhancing its modern design lines

# PureLine 30" Convection Oven H 6680 BP




**Comfort Handle:**  
Standard with ContourLine


(DS 6708 Item #09828380)

**ComfortSwivel Handle:**  
Optional for ContourLine  
Optional for PureLine

(DS 6718 Item # 09828390)

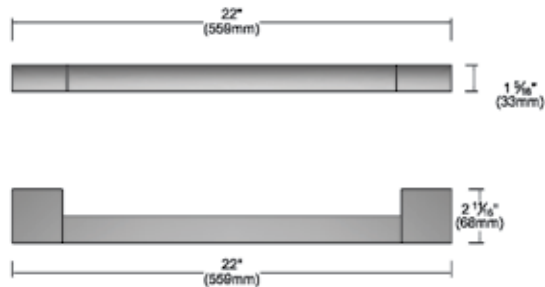


Comfort Handle  
standard on  
H 6180 BP





ComfortSwivel Handle  
standard on  
H 6580 BP


**Silhouette Handle:**  
Standard with Pureline  
Optional for Contourline  
(DS 6808 Item # 09828400)

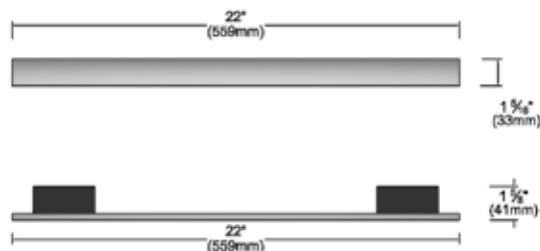

Silhouette Handle  
standard on  
H 6280 BP and  
H 6680 BP



**Silhouette Handle (Chrome):**  
Standard with BrilliantWhite  
(DS 6808 Item # 09828410)



**Silhouette Handle:**  
Standard with Truffle Brown  
(DS 6808 Item # 09870690)

# PureLine 30" Convection Oven

## H 6680 BP



### SPECIFICATIONS

#### H 6680 BP — Item 22668053USA

Overall Unit Width - Excluding Fascia Dimension	28 <sup>7</sup> / <sub>16</sub> " (722mm)
Overall Height - Excluding Fascia Dimension	27 <sup>3</sup> / <sub>4</sub> " (705mm)
Overall Unit Depth - Excluding Fascia Dimensions	23 <sup>3</sup> / <sub>4</sub> " (603mm)
Oven Door Clearance	23" (584mm)
Overall Oven Interior Capacity	4.63 cu.ft - 131.24 liters
Overall Fascia Dimensions	29 <sup>13</sup> / <sub>16</sub> " (757mm) W x 28 <sup>5</sup> / <sub>8</sub> " (727mm) H x 7 <sup>7</sup> / <sub>8</sub> " (23mm) D
Oven Interior Dimensions	24 <sup>1</sup> / <sub>2</sub> " (622mm) W x 16 <sup>5</sup> / <sub>8</sub> " (423mm) H x 18 <sup>1</sup> / <sub>4</sub> " (464mm) D

#### Built-In

Minimum Cabinet Width	28 <sup>1</sup> / <sub>2</sub> " (724mm)
Minimum Cabinet Depth	24" (610mm)
Minimum Cabinet Opening Height	28 <sup>1</sup> / <sub>4</sub> " (718mm)
Minimum Base Support	193 lbs
Additional Cut-outs Required	Venting cut-out required at base of cabinet (4" x 28" / 100mm x 720mm) in the bottom of the cabinet for power cord and ventilation

#### Electrical

Electrical Requirements	208/240V 30A 60Hz circuit
Power Cord	Yes - NEMA 14-30 plug
Electrical Rating	120/208V, 30A, 60Hz 5800w / 120/240V, 30A, 60Hz 4400w
Total Amps	240V / 24.166A / 208V / 21.15A

#### Shipping

Shipping Weight	216 lbs
Shipping Dimensions	32 <sup>11</sup> / <sub>16</sub> " W x 35 <sup>1</sup> / <sub>16</sub> " H x 30 <sup>5</sup> / <sub>16</sub> " L

#### Support


Call	800.843.7231
20/20	2020technologies.com

# PureLine 30" Convection Oven H 6680 BP




## PRODUCT VIEWS

Isometric

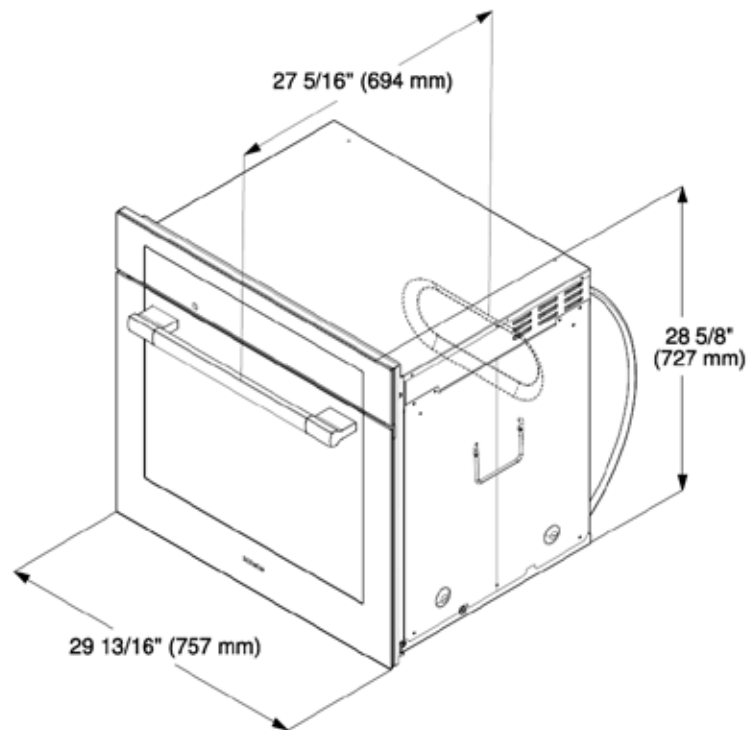

Front

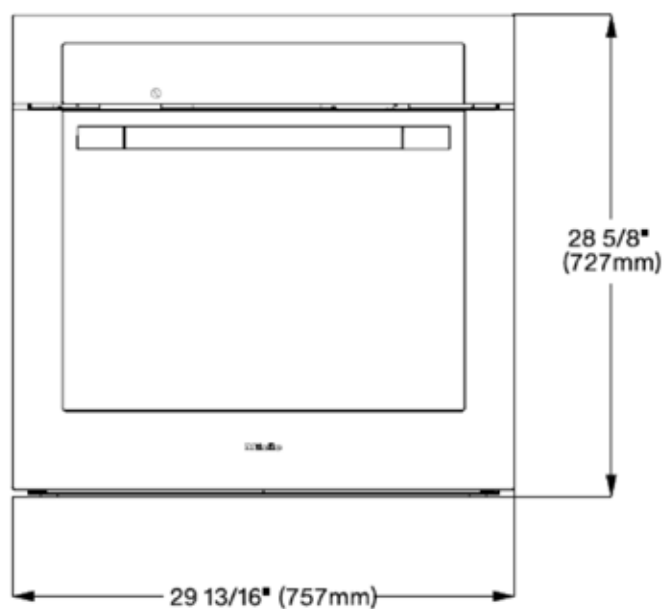


# PureLine 30" Convection Oven H 6680 BP




## PRODUCT VIEWS

Top View

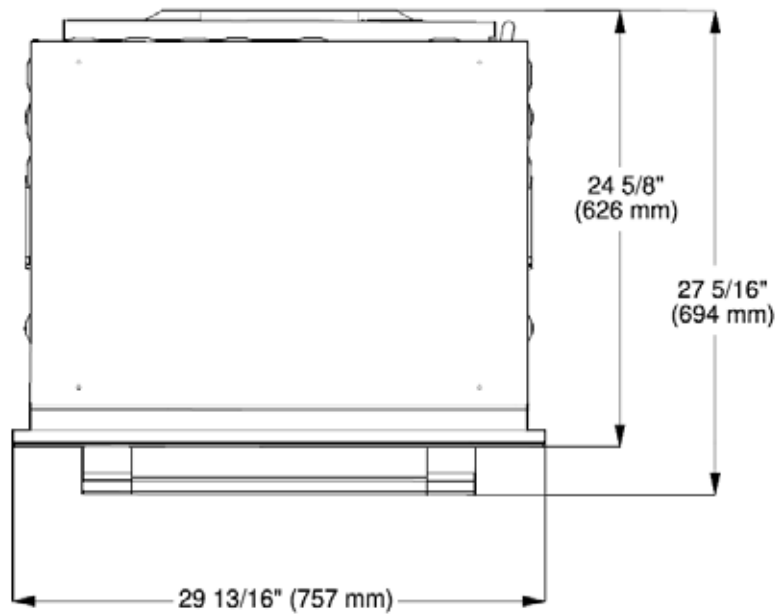

Rear View

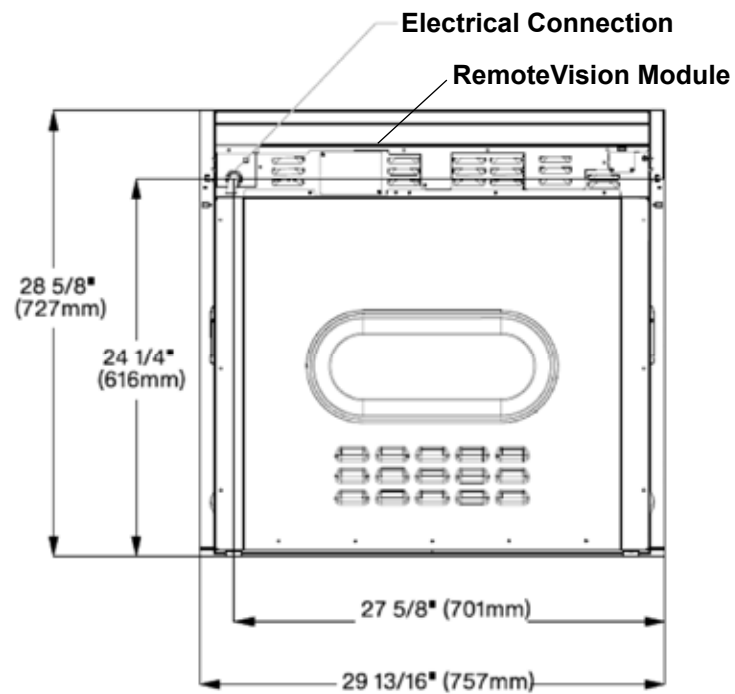


# PureLine 30" Convection Oven H 6680 BP




## PRODUCT VIEWS

Side View

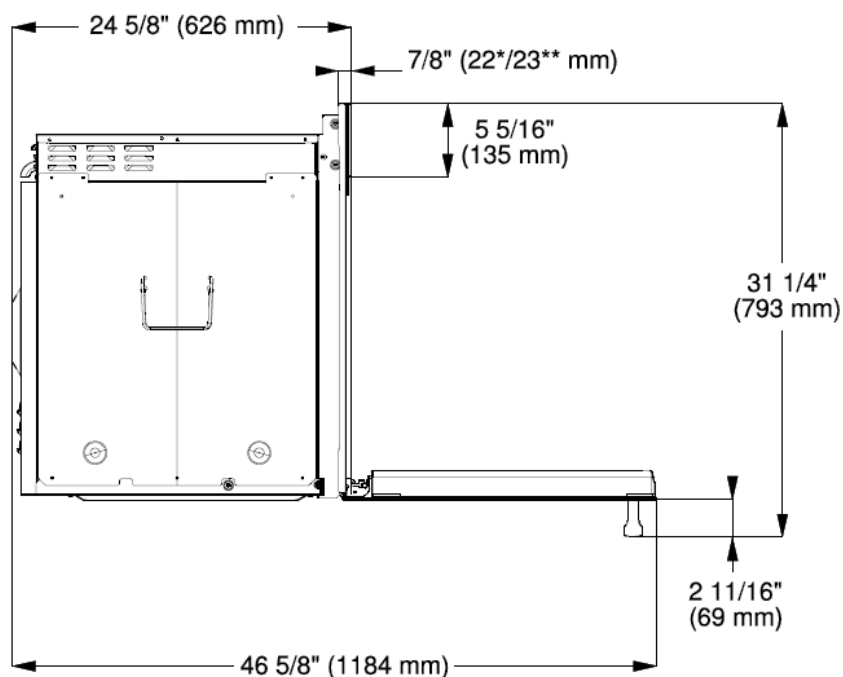

## INSTALLATION SPECIFICATIONS

Install in Tall Cabinet

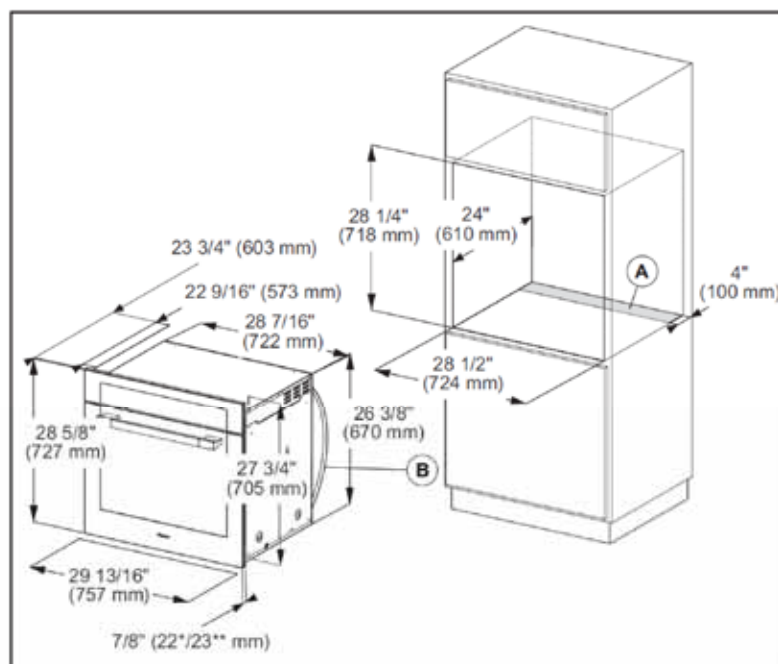


- Ⓐ Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation
- Ⓑ Power cord with plug
- \* Oven with glass front
- \*\* Oven with metal front

# PureLine 30" Convection Oven H 6680 BP



## INSTALLATION SPECIFICATIONS

### Undercounter Installation

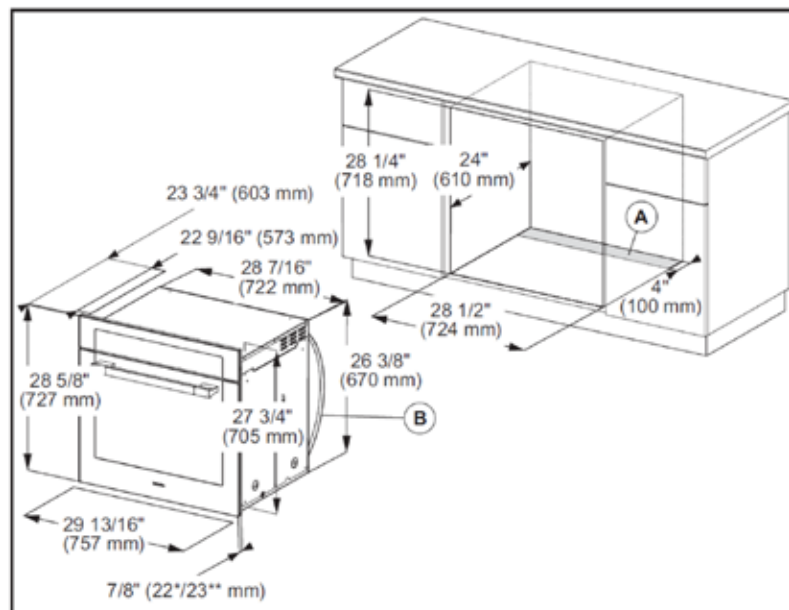

Ⓐ Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation

Ⓑ Power cord with plug

\* Oven with glass front

\*\* Oven with metal front