



## L Series Built-In Double Ovens

Electronic controls hide behind a stainless steel panel. A motor quietly rotates the control panel into position. Both ovens of the Wolf L series built-in double oven feature the Wolf dual convection system. It delivers even temperature and airflow throughout the oven. Two fans and four heating elements operate either simultaneously or in sequence, depending on which one of the ten different cooking modes you choose.



Model DO30F/S shown—framed door style.

### FEATURES

- Framed and unframed door styles in stainless steel finish.
- Dual convection logic control system.
- Ten cooking modes—bake, roast, broil, convection bake, convection roast, convection broil, convection, bake stone (accessory required), dehydrate (accessory required) and proof in each oven.
- Rotating glass touch control panel.
- Cobalt blue porcelain oven interiors.
- Six-level rack guides with three adjustable oven racks; one full-extension easy glide, one full-extension door glide and one standard in each oven.
- Large viewing triple-pane windows.
- Dual interior halogen lighting.
- Hidden bake element and recessed broil element in each oven.
- Temperature probe receptacle in each oven.
- Self-clean, delayed start and Sabbath feature in each oven.
- Spring and damper door hinge system for smooth opening and closing.

### MODEL OPTIONS

Door Style

DO30F/S

Framed

DO30U/S

Unframed

### ACCESSORIES

- Bake stone accessory, includes stone, rack and peel.
- Two-piece broiler pan and temperature probe.
- Set of three standard oven racks.
- One full-extension easy glide rack.
- Dehydration racks with door stop.
- 30" baking sheet kit.

Accessories are available through your authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, [wolfappliance.com](http://wolfappliance.com).



Model DO30F/S  
Framed Door Style



Model DO30U/S  
Unframed Door Style



This appliance is certified by Star-K to meet strict religious regulations in conjunction with specific instructions found on [www.star-k.org](http://www.star-k.org).




Rotating glass touch control panel.



## L Series Built-In Double Ovens

### OVERALL DIMENSIONS

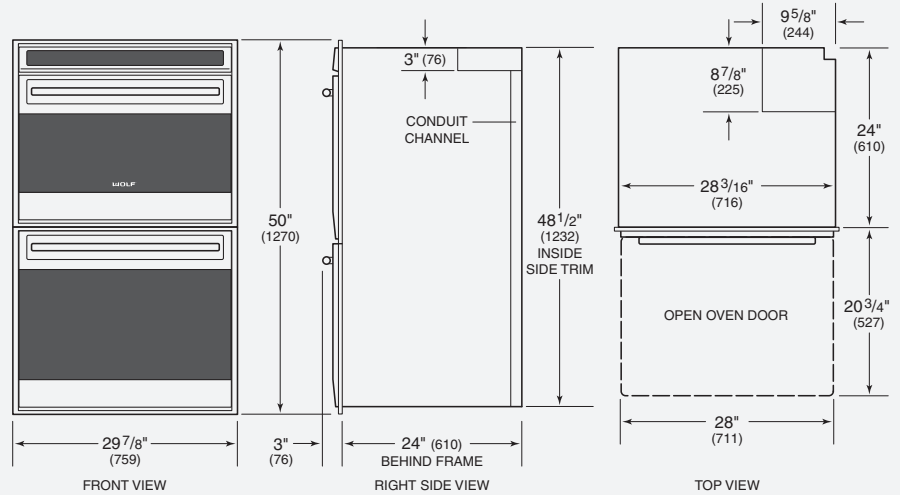


Unit dimensions may vary by  $\pm 1/8$ ".

### SPECIFICATIONS

Overall Width	29 <sup>7</sup> / <sub>8</sub> "
Overall Height	50"
Overall Depth	24"
Oven Door Clearance	20 <sup>3</sup> / <sub>4</sub> "
Overall Oven Interior Capacity (per oven)	4.5 cu ft
Oven Interior Dimensions (per oven)	25" W x 16 <sup>1</sup> / <sub>2</sub> " H x 19" D
Minimum Cabinet Width	30"
Minimum Cabinet Depth	24"
Minimum Base Support	400 lbs
Opening Width	28 <sup>1</sup> / <sub>2</sub> "
Opening Height	49 <sup>5</sup> / <sub>8</sub> "
Electrical Requirements	240/208 V AC 60 Hz, 50 amp circuit
Conduit	5' flexible 4-wire
Electrical Rating	8.9 kW at 240 V 6.7 kW at 208 V
Total Amps	37
Shipping Weight	466 lbs

### INSTALLATION SPECIFICATIONS

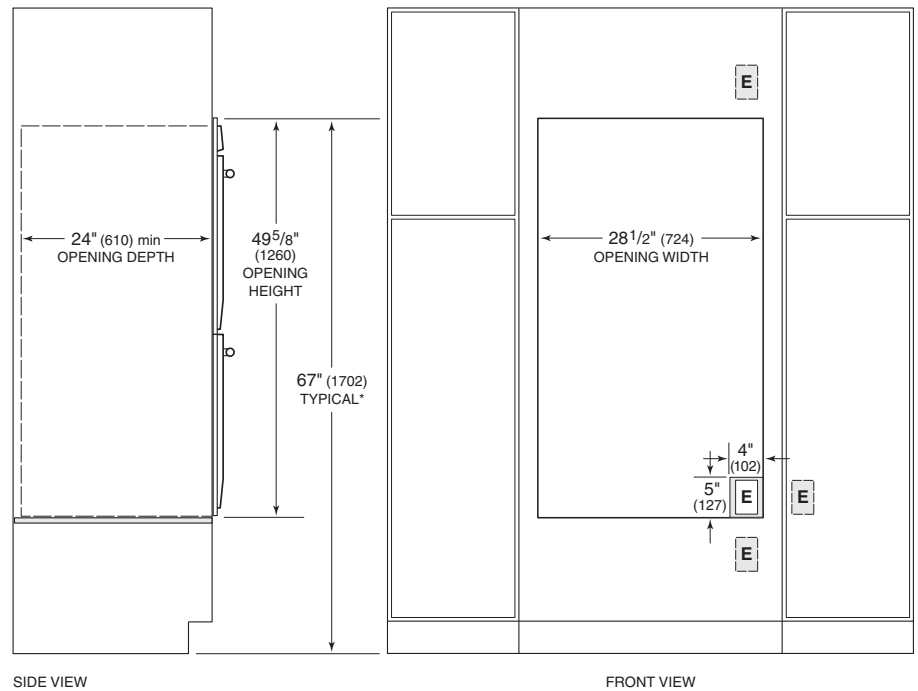

\*Dimension must accommodate height of oven trim.

NOTE: Location of electrical supply within opening may require additional cabinet depth. Dashed line represents profile of unit.

**IMPORTANT NOTE:** Unless you are using cabinets deeper than 24", it is recommended that the electrical supply be placed in an adjacent cabinet within reach of the conduit. Choose the location shown in the illustration that best suits your installation.

### INSTALLATION NOTES

Complete installation specifications can be found on our website, [wolfappliance.com](http://wolfappliance.com).

Dimensions in parentheses are in millimeters unless otherwise specified.