



2016 Designer Product Guide



Handcrafted in Reading, Pennsylvania, BlueStar® cooking products are designed for discerning home chefs who demand restaurant-quality results in their own kitchens. Our commitment to precision in form and function is why many top chefs consider BlueStar to be the world's top-performing residential cooking equipment.

Built with the highest-quality materials and distinctive workmanship that comes from 130 years expertise, BlueStar turns up the heat on home cooking with a fully customizable line to suit the specific cooking needs of the accomplished home chef. Available in a painter's palette of colors, and with near infinite configuration possibilities, BlueStar premium cooking products deliver restaurant magic to the home kitchen.

Unsurpassed Customization

Available in over 750+ colors and finishes with near infinite configuration possibilities, BlueStar® cooking equipment is designed to suit your personal style and unique cooking preferences. Build your own BlueStar® today at www.bluestarcooking.com.

Design Preferences

Color

750+ Colors & Finishes



Knob Color

Available in 190 Colors



Trim Finish (Handles, Bezels)

Stainless Steel, Brass, Antique Brass, Antique Copper, Copper, Chrome, Smoked Chrome, Gun Metal Nickel, Satin Nickel, Oil Rubbed Bronze



Cooking Preferences

Size

24", 30", 36", 48" & 60"



Burner Configuration



Additional configurations available at www.bluestarcooking.com

Backguard Island Trim, 6", 17" & 24" Door

Standard, Swing Left, Swing Right and French Doors




Notes	





Freestanding Ranges

24" PLATINUM SERIES



ELECTRICAL CORD LOCATED IN BACK OF UNIT LOCATION OF ELECTRICAL OUTLET MUST NOT BE HIGHER THAN 3" FROM FLOOR IF LOCATED BEHIND THE UNIT OR CAN BE LOCATED IN AN ADJOINING CABINET.





PRODUCT FEATURES

- PrimaNova[™] power burner delivers 25,000 BTUs of intense heat
- All burners include Interchangeable Griddle and Charbroiler
- Gentle 130° simmer burner
- New PowR Oven[™] provides 40% faster preheating and 30% increase in oven efficiency
- Extra-large oven with True European Convection and 1850° Infrared Broiler
- · Available in 750+ colors and finishes
- 24" depth for compatibility with standard kitchen cabinetry
- Removable, dishwasher-friendly stainless steel drip trays
- · Includes standard island trim backguard

SPECIFICATIONS

Range Dimensions: 23.875"W x 24"D x 36.75"H

Oven Interior: 20.25"W x 20"D x 15"H
Top Burner Rating: 25,000 BTUs
Simmer Burner Rating: 9,000 BTUs
PowR Oven Burner Rating: 25,000 BTUs
Infrared Broiler Rating: 15,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 1/2"

Installation Clearance: 0" Side Cabinet, 0" Back Wall

MODEL CONFIGURATIONS


Four Burners with Cast Iron
Interchangeable Griddle/Charbroiler

BSP244B


DESIGN OPTIONS


• Range color, knob color, trim finish, and backguard options (see page 4).

- Casters
- · Additional oven rack
- · Full extension oven rack



LOCATION OF ELECTRICAL OUTLET MUST
NOT BE HIGHER THAN 3" FROM FLOOR IF LOCATED BEHIND
THE UNIT OR CAN BE LOCATED IN AN ADJOINING CABINET.





PRODUCT FEATURES

- PrimaNova[™] power burner delivers 25,000 BTUs of intense heat
- All burners include Interchangeable Griddle and Charbroiler
- Gentle 130° simmer burner
- New PowR Oven[™] provides 40% faster preheating and 30% increase in oven efficiency
- Extra-large oven with True European Convection and 1850° Infrared Broiler
- Available in 750+ colors and finishes
- Accommodates full-size commercial 18" x 26" baking sheet
- 24" depth for compatibility with standard kitchen cabinetry
- Removable, dishwasher-friendly stainless steel drip trays
- · Includes standard island trim backguard

SPECIFICATIONS

Range Dimensions: 29.875"W x 24"D x 36.75"H

Oven Interior: 26.25"W x 20"D x 15"H
Top Burner Rating: 25,000 BTUs
Simmer Burner Rating: 9,000 BTUs
PowR Oven Burner Rating: 25,000 BTUs
Infrared Broiler Rating: 15,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 1/2"

Installation Clearance: 0" Side Cabinet, 0" Back Wall

MODEL CONFIGURATIONS

Four Burners with Cast Iron Interchangeable Griddle/Charbroiler


BSP304B


DESIGN OPTIONS


• Range color, knob color, trim finish, and backguard options (see page 4).

- Casters
- Additional oven rack
- · Full extension oven rack

36" PLATINUM SERIES







PRODUCT FEATURES

- PrimaNova[™] power burner delivers 25,000 BTUs of intense heat
- All burners include Interchangeable Griddle and Charbroiler
- Gentle 130° simmer burner
- New PowR Oven[™] provides 40% faster preheating and 30% increase in oven efficiency
- Extra-large oven with True European Convection and 1850° Infrared Broiler
- Available in 750+ colors and finishes
- Accommodates full-size commercial 18" x 26" baking sheet
- 24" depth for compatibility with standard kitchen cabinetry
- Removable, dishwasher-friendly stainless steel drip trays
- · Includes standard island trim backguard

SPECIFICATIONS

Range Dimensions: 35.875"W x 24"D x 36.75"H

Oven Interior: 29"W x 20"D x 15"H
Top Burner Rating: 25,000 BTUs
Simmer Burner Rating: 9,000 BTUs
PowR Oven Burner Rating: 25,000 BTUs
Infrared Broiler Rating: 15,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 3/4"

Installation Clearance: 0" Side Cabinet, 0" Back Wall

MODEL CONFIGURATIONS


Six Burners with Cast Iron
Interchangeable Griddle/Charbroiler


BSP366B


DESIGN OPTIONS

• Range color, knob color, trim finish, and backguard options (see page 4).

- Casters
- · Additional oven rack
- Full extension oven rack

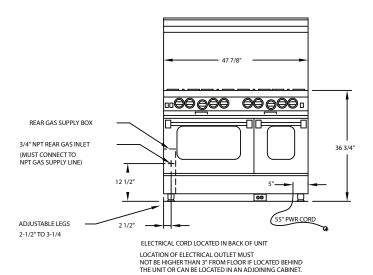





PRODUCT FEATURES

- PrimaNova[™] power burner delivers 25,000 BTUs of intense heat
- All burners include Interchangeable Griddle and Charbroiler
- Gentle 130° simmer burner
- New PowR Oven[™] provides 40% faster preheating and 30% increase in oven efficiency
- Extra-large oven with True European Convection and 1850° Infrared Broiler
- · Available in 750+ colors and finishes
- Accommodates full-size commercial 18" x 26" baking sheet
- 24" depth for compatibility with standard kitchen cabinetry
- Removable, dishwasher-friendly stainless steel drip trays
- · Includes standard island trim backguard

SPECIFICATIONS

Range Dimensions: 47.875"W x 24"D x 36.75"H

Oven Interior: 26.25"W x 20"D x 15"H Small Oven Interior: 12"W x 20"D x 15"H Top Burner Rating: 25,000 BTUs

Simmer Burner Rating: 9,000 BTUs PowR Oven Burner Rating: 25,000 BTUs Small Oven Burner Rating: 15,000 BTUs Infrared Broiler Rating: 15,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 3/4"

Installation Clearance: 0" Side Cabinet, 0" Back Wall

MODEL CONFIGURATIONS

Eight Burners with Cast Iron Interchangeable Griddle/Charbroiler


BSP488B

DESIGN OPTIONS


 Range color, knob color, trim finish, and backguard options (see page 4).


- Casters
- Additional oven rack
- · Full extension oven rack

60" PLATINUM SERIES

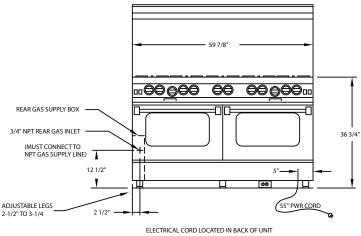

ELECTRICAL CORD LOCATED IN BACK OF UNIT LOCATION OF ELECTRICAL OUTLET MUST NOT BE HIGHER THAN 3" FROM FLOOR IF LOCATED BEHIND THE UNIT OR CAN BE LOCATED IN AN ADJOINING CABINET.





PRODUCT FEATURES

- PrimaNova[™] power burner delivers 25,000 BTUs of intense heat
- All burners include Interchangeable Griddle and Charbroiler
- Gentle 130° simmer burner
- New PowR Oven[™] provides 40% faster preheating and 30% increase in oven efficiency
- Extra-large oven with True European Convection and 1850° Infrared Broiler
- · Available in 750+ colors and finishes
- Accommodates full-size commercial 18" x 26" baking sheet
- 24" depth for compatibility with standard kitchen cabinetry
- Removable, dishwasher-friendly stainless steel drip trays
- · Includes standard island trim backguard

SPECIFICATIONS

Range Dimensions: 59.875"W x 24"D x 36.75"H

Oven Interior: 26.25"W x 20"D x 15"H
Top Burner Rating: 25,000 BTUs
Simmer Burner Rating: 9,000 BTUs
PowR Oven Burner Rating: 25,000 BTUs
Infrared Broiler Rating: 15,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 3/4"

Installation Clearance: 0" Side Cabinet, 0" Back Wall

MODEL CONFIGURATIONS


Ten Burners with Cast Iron
Interchangeable Griddle/Charbroiler

BSP6010B


DESIGN OPTIONS


• Range color, knob color, trim finish, and backguard options (see page 4).

- Casters
- · Additional oven rack
- · Full extension oven rack



LOCATION OF ELECTRICAL OUTLET MUST
NOT BE HIGHER THAN 3" FROM FLOOR IF LOCATED BEHIND
THE UNIT OR CAN BE LOCATED IN AN ADJOINING CABINET.





PRODUCT FEATURES

- UltraNova[™] power burner delivers 22,000 BTUs of intense heat
- Integrated cooktop options include griddles, charbroilers, and French tops
- Gentle 130° simmer burner
- Extra-large convection oven that accommodates a half size 18" x 13" commercial baking sheet
- 1850° Infrared broiler
- Available in 750+ colors and finishes
- · Refined design and easier-to-clean cooktop
- 24" depth for compatibility with standard kitchen cabinetry

SPECIFICATIONS

Range Dimensions: 23.875"W x 24"D x 36.75"H

Oven Interior: 20.25"W x 20"D x 15"H Top Burner Rating: 22,000 BTUs Simmer Burner Rating: 9,000 BTUs

24" Charbroiler Burner Rating: 30,000 BTUs
24" Griddle Burner Rating: 30,000 BTUs
French Top Burner Rating: 18,000 BTUs
Oven Burner Rating: 30,000 BTUs
Infrared Broiler Rating: 15,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 1/2"

Installation Clearance: 0" Side Cabinet, 0" Back Wall

MODEL CONFIGURATIONS

 Four Burners
 RNB244BV2

 24" Griddle
 RNB24GV2

 24" Charbroiler
 RNB24CBV2


 French Top
 RNB24FTV2

DESIGN OPTIONS


• Range color, knob color, trim finish, and backguard options (see page 4).

- Casters
- · Additional oven rack
- · Full extension oven rack

30" RNB SERIES



LOCATION OF ELECTRICAL OUTLET MUST
NOT BE HIGHER THAN 3" FROM FLOOR IF LOCATED BEHIND
THE UNIT OR CAN BE LOCATED IN AN ADJOINING CABINET.





PRODUCT FEATURES

- UltraNova[™] power burner delivers 22,000 BTUs of intense heat
- Integrated cooktop options include griddles, charbroilers, and French tops
- Gentle 130° simmer burner
- Extra-large convection oven that accommodates a full size 18" x 26" commercial baking sheet
- 1850° Infrared broiler
- · Available in 750+ colors and finishes
- · Refined design and easier-to-clean cooktop
- 24" depth for compatibility with standard kitchen cabinetry

SPECIFICATIONS

Range Dimensions: 29.875"W x 24"D x 36.75"H

Oven Interior: 26.25"W x 20"D x 15"H
Top Burner Rating: 22,000 BTUs
Simmer Burner Rating: 9,000 BTUs
Large Oven Burner Rating: 30,000 BTUs
Infrared Broiler Rating: 15,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 1/2"

Installation Clearance: 0" Side Cabinet, 0" Back Wall

MODEL CONFIGURATIONS


Four Burners


RNB304BV2


DESIGN OPTIONS

• Range color, knob color, trim finish, and backguard options (see page 4).

- Casters
- · Additional oven rack
- · Full extension oven rack







PRODUCT FEATURES

- UltraNova[™] power burner delivers 22,000 BTUs of intense heat
- Integrated cooktop options include griddles, charbroilers, and French tops
- Gentle 130° simmer burner
- Extra-large convection oven that accommodates a full size 18" x 26" commercial baking sheet
- 1850° Infrared broiler
- Available in 750+ colors and finishes
- · Refined design and easier-to-clean cooktop
- 24" depth for compatibility with standard kitchen cabinetry

SPECIFICATIONS

Range Dimensions: 35.875"W x 24"D x 36.75"H

Oven Interior: 29"W x 20"D x 15"H Top Burner Rating: 22,000 BTUs Simmer Burner Rating: 9,000 BTUs

12" Charbroiler Burner Rating: 15,000 BTUs
12" Griddle Burner Rating: 15,000 BTUs
French Top Burner Rating: 18,000 BTUs
Large Oven Burner Rating: 30,000 BTUs
Infrared Broiler Rating: 15,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 3/4"

Installation Clearance: 0" Side Cabinet, 0" Back Wall

MODEL CONFIGURATIONS


Six BurnersRNB366BV2Four Burners with 12" GriddleRNB364GV2Four Burners with 12" CharbroilerRNB364CBV2


DESIGN OPTIONS


 Range color, knob color, trim finish, and backguard options (see page 4).

- Casters
- · Additional oven rack
- Full extension oven rack

48" RNB SERIES

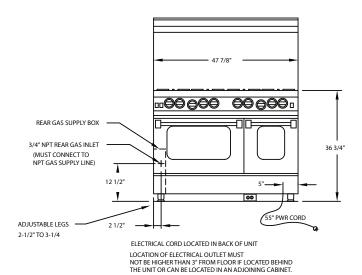





PRODUCT FEATURES

- UltraNova[™] power burner delivers 22,000 BTUs of intense heat
- Integrated cooktop options include griddles, charbroilers, and French tops
- Gentle 130° simmer burner
- Extra-large convection oven that accommodates a full size 18" x 26" commercial baking sheet
- 1850° Infrared broiler
- Available in 750+ colors and finishes
- · Refined design and easier-to-clean cooktop
- 24" depth for compatibility with standard kitchen cabinetry

SPECIFICATIONS

Range Dimensions: 47.875"W x 24"D x 36.75"H
Large Oven Interior: 26.25"W x 20"D x 15"H
Small Oven Interior: 12"W x 20"D x 15"H

Top Burner Rating: 22,000 BTUs **Simmer Burner Rating:** 9,000 BTUs

12" Charbroiler Burner Rating: 15,000 BTUs
24" Charbroiler Burner Rating: 30,000 BTUs
12" Griddle Burner Rating: 15,000 BTUs
24" Griddle Burner Rating: 30,000 BTUs
French Top Burner Rating: 18,000 BTUs
Large Oven Burner Rating: 30,000 BTUs
Small Oven Burner Rating: 15,000 BTUs
Infrared Broiler Rating: 15,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH (Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 3/4"

Installation Clearance: 0" Side Cabinet, 0" Back Wall

MODEL CONFIGURATIONS

Eight Burners RNB488V2
Six Burners with 12" Griddle RNB486GV2
Four Burners with 24" Griddle RNB484GV2
Four Burners with 12" Griddle RNB484GCBV2
& Charbroiler
Six Burners with 12" Charbroiler RNB486CB


Four Burners with 12" Charbroiler Four Burners with 24" Charbroiler Four Burners with French Top


RNB486CB RNB484CB RNB484FT


DESIGN OPTIONS

 Range color, knob color, trim finish, and backguard options (see page 4).

- Casters
- · Additional oven rack
- · Full extension oven rack

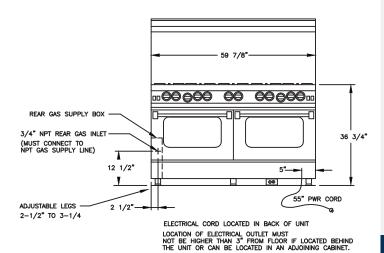





PRODUCT FEATURES

- UltraNova[™] power burner delivers 22,000 BTUs of intense heat
- Integrated cooktop options include griddles, charbroilers, and French tops
- Gentle 130° simmer burner
- Extra-large convection oven that accommodates a full size 18" x 26" commercial baking sheet
- 1850° Infrared broiler
- Available in 750+ colors and finishes
- · Refined design and easier-to-clean cooktop
- 24" depth for compatibility with standard kitchen cabinetry

SPECIFICATIONS

Range Dimensions: 59.875"W x 24"D x 36.75"H Large Oven Interior: 26.25"W x 20"D x 15"H

Top Burner Rating: 22,000 BTUs **Simmer Burner Rating:** 9,000 BTUs

12" Charbroiler Burner Rating: 15,000 BTUs
24" Charbroiler Burner Rating: 30,000 BTUs
12" Griddle Burner Rating: 15,000 BTUs
24" Griddle Burner Rating: 30,000 BTUs
French Top Burner Rating: 18,000 BTUs
Large Oven Burner Rating: 30,000 BTUs
Infrared Broiler Rating: 15,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 3/4"

Installation Clearance: 0" Side Cabinet, 0" Back Wall

MODEL CONFIGURATIONS

Ten Burners
Eight Burners with 12" Griddle
Six Burners with 24" Griddle
Six Burners with 12" Griddle
& Charbroiler

RNB6010V2 RNB608GV2 RNB606GV2 RNB606GCBV2

Eight Burners with 12" Charbroiler Six Burners with 24" Charbroiler Six Burners with French Top


RNB608CBV2 RNB606CBV2 RNB606FTV2

DESIGN OPTIONS


 Range color, knob color, trim finish, and backguard options (see page 4).


- Casters
- · Additional oven rack
- · Full extension oven rack

36" RNB HERITAGE CLASSIC SERIES



ELECTRICAL CORD LOCATED IN BACK OF UNIT
LOCATION OF ELECTRICAL OUTLET MUST
NOT BE HIGHERTHAN 3" FROM FLOOR IF LOCATED BEHIND
THE UNIT OR CAN BE LOCATED IN AN ADJOINING CABINET.





PRODUCT FEATURES

- UltraNova[™] power burner delivers 22,000 BTUs of intense heat
- Gentle 130° simmer burner
- · Full motion grates
- Includes 12" raised griddle/broiler for melting and edge-browning
- Extra-large convection oven with 1850° Infrared broiler
- Accommodates full-size commercial 18" x 26" baking sheet
- Available in 750+ colors and finishes
- Available backguard options: 17" or 24"
- · Raised griddle available only on right side

SPECIFICATIONS

Range Dimensions: 35.875"W x 24"D x 41.25"H

Oven Interior: 29"W x 20"D x 15"H Top Burner Rating: 22,000 BTUs Simmer Burner Rating: 9,000 BTUs Infrared Broiler Rating: 15,000 BTUs

Raised Griddle/Broiler Burner Rating: 15,000 BTUs

Infrared Broiler Rating: 30,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 3/4"

Installation Clearance: 0" Side Cabinet, 0" Back Wall

MODEL CONFIGURATIONS


Four Burners with Griddle/Broiler

RNB364GHCV2


DESIGN OPTIONS


 Range color, knob color, trim finish, and backguard options (see page 4).

- Casters
- · Additional oven rack
- · Full extension oven rack



ELECTRICAL CORD LOCATED IN BACK OF UNIT
LOCATION OF ELECTRICAL OUTLET MUST
NOT BE HIGHERTHAN 3" FROM FLOOR IF LOCATED BEHIND
THE UNIT OR CAN BE LOCATED IN AN ADJOINING CABINET.





PRODUCT FEATURES

- UltraNova[™] power burner delivers 22,000 BTUs of intense heat
- Gentle 130° simmer burner
- Full motion grates
- Includes 12" raised griddle/broiler for melting and edge-browning
- Extra-large convection oven with 1850° Infrared broiler
- Accommodates full-size commercial 18" x 26" baking sheet
- · Available in 750+ colors and finishes
- · Available backguard options: 17" or 24"
- Raised griddle available only on right side

SPECIFICATIONS

Range Dimensions: 47.875"W x 24"D x 41.25"H

Oven Interior: 26.25"W x 20"D x 15"H Small Oven Interior: 12"W x 20"D x 15"H

Top Burner Rating: 22,000 BTUs **Simmer Burner Rating:** 9,000 BTUs

Raised Griddle/Broiler Burner Rating: 15,000 BTUs

Large Oven Burner Rating: 30,000 BTUs

Small Oven Rating: 15,000 BTUs Infrared Broiler Rating: 15,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 3/4"

Installation Clearance: 0" Side Cabinet, 0" Back Wall

MODEL CONFIGURATIONS

Six Burners with Griddle/Broiler


RNB486GHCV2

DESIGN OPTIONS

• Range color, knob color, trim finish, and backguard options (see page 4).


- Casters
- · Additional oven rack
- Full extension oven rack

60" RNB HERITAGE CLASSIC SERIES



ELECTRICAL CORD LOCATED IN BACK OF UNIT

LOCATION OF ELECTRICAL OUTLET MUST NOT BE HIGHER THAN 3" FROM FLOOR IF LOCATED BEHIND THE UNIT OR CAN BE LOCATED IN AN ADJOINING CABINET.



RNB606GHCV2 SIMMER 15K 15K

PRODUCT FEATURES

- UltraNova[™] power burner delivers 22,000 BTUs of intense heat
- Gentle 130° simmer burner
- Full motion grates
- Includes 24" raised griddle/broiler for melting and edge-browning
- Extra-large convection oven with 1850° Infrared broiler
- Accommodates full-size commercial 18" x 26" baking sheet
- · Available in 750+ colors and finishes
- · Available backguard options: 17" or 24"
- · Raised griddle available only on right side

SPECIFICATIONS

Range Dimensions: 59.875"W x 24"D x 41.25"H

Oven Interior: 26.25"W x 20"D x 15"H Top Burner Rating: 22,000 BTUs Simmer Burner Rating: 9,000 BTUs

Raised Griddle/Broiler Burner Rating: 30,000 BTUs

Large Oven Burner Rating: 30,000 BTUs Infrared Broiler Rating: 15,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 3/4"

Installation Clearance: 0" Side Cabinet, 0" Back Wall

MODEL CONFIGURATIONS

Six Burners with Griddle/Broiler


RNB606GHCV2

DESIGN OPTIONS


• Range color, knob color, trim finish, and backguard options (see page 4).

- Casters
- · Additional oven rack
- Full extension oven rack

30" PRECIOUS METALS SERIES



LOCATION OF ELECTRICAL OUTLET MUST
NOT BE HIGHER THAN 3" FROM FLOOR IF LOCATED BEHIND
THE UNIT OR CAN BE LOCATED IN AN ADJOINING CABINET.



RNB304BPM SIMMER 15K 15K 22K 22K 22K 22K

PRODUCT FEATURES

- UltraNova[™] power burner delivers 22,000 BTUs of intense heat
- Gentle 130° simmer burner
- Integrated cooktop options include griddles, charbroilers & French tops
- Includes 12" raised griddle/broiler for melting and edge-browning
- 1850° Infrared broiler
- Contemporary, urban aesthetic with a sleek, modern feel
- Dependent French doors allow for easy loading/unloading
- Accommodates full-size commercial 18" x 26" baking sheet
- Available in 6 unique colors or 750+ standard options
- · Colored knobs and trim to match the range color
- 24" depth for compatibility with standard kitchen cabinetry

SPECIFICATIONS

Range Dimensions: 29.875"W x 24"D x 36.75"H Large Oven Interior: 26.25"W x 20"D x 15"H

Top Burner Rating: 22,000 BTUs Simmer Burner Rating: 9,000 BTUs Large Oven Burner Rating: 30,000 BTUs Infrared Broiler Rating: 15,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 1/2"

Installation Clearance: 0" Side Cabinet, 0" Back Wall

MODEL CONFIGURATIONS

Four Burners


RNB304BPM

DESIGN OPTIONS


• Range color, knob color, trim finish (see page 4).


- Casters
- · Additional oven rack
- Full extension oven rack

36" PRECIOUS METALS SERIES



ELECTRICAL CORD LOCATED IN BACK OF UNIT LOCATION OF ELECTRICAL OUTLET MUST NOT BE HIGHERTHAN 3" FROM FLOOR IF LOCATED BEHIND THE UNIT OR CAN BE LOCATED IN AN ADJOINING CABINET.





PRODUCT FEATURES

- UltraNova[™] power burner delivers 22,000 BTUs of intense heat
- Gentle 130° simmer burner
- Integrated cooktop options include griddles, charbroilers & French tops
- Includes 12" raised griddle/broiler for melting and edge-browning
- 1850° Infrared broiler
- Contemporary, urban aesthetic with a sleek, modern feel
- Dependent French doors allow for easy loading/unloading
- Accommodates full-size commercial 18" x 26" baking sheet
- Available in 6 unique colors or 750+ standard options
- · Colored knobs and trim to match the range color
- 24" depth for compatibility with standard kitchen cabinetry

SPECIFICATIONS

Range Dimensions: 35.875"W x 24"D x 36.75"H

Large Oven Interior: 29"W x 20"D x 15"H

Top Burner Rating: 22,000 BTUs
Simmer Burner Rating: 9,000 BTUs
12" Griddle Burner Rating: 15,000 BTUs
12" Charbroiler Burner Rating: 15,000 BTUs
French Top Burner Rating: 18,000 BTUs
Large Oven Burner Rating: 30,000 BTUs
Infrared Broiler Rating: 15,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 3/4"

Installation Clearance: 0" Side Cabinet, 0" Back Wall


MODEL CONFIGURATIONS

Six Burners RNB366BPM
Four Burners with 12" Griddle RNB364GPM
Four Burners with 12" Charbroiler RNB364CBPM
Four Burners with French Top RNB364FTPM


DESIGN OPTIONS

• Range color, knob color, trim finish (see page 4).

- Casters
- · Additional oven rack
- Full extension oven rack



ELECTRICAL CORD LOCATED IN BACK OF UNIT
LOCATION OF ELECTRICAL OUTLET MUST
NOT BE HIGHER THAN 3" FROM FLOOR IF LOCATED BEHIND
THE UNIT OR CAN BE LOCATED IN AN ADJOINING CABINET.





PRODUCT FEATURES

- Nova[™] power burner delivers 15,000 BTUs of intense heat
- Gentle 130° simmer burner
- Full motion grates
- Extra-large convection oven that accommodates a full size 18" x 26" commercial baking sheet
- 1850° Infrared broiler
- · Available in stainless steel only
- · Includes standard island trim backguard
- 24" depth for compatibility with standard kitchen cabinetry

SPECIFICATIONS

Range Dimensions: 29.875"W x 24"D x 36.75"H

Oven Interior: 26.25"W x 20"D x 15"H Top Burner Rating: 15,000 BTUs Simmer Burner Rating: 9,000 BTUs Oven Burner Rating: 30,000 BTUs Infrared Broiler Rating: 15,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 1/2"

Installation Clearance: 0" Side Cabinet, 0" Back Wall

MODEL CONFIGURATIONS

Four Burners


RCS304BV2

DESIGN OPTIONS

• Knob color and backguard options (see page 4).


- Casters
- · Additional oven rack


36" RCS SERIES



ELECTRICAL CORD LOCATED IN BACK OF UNIT

LOCATION OF ELECTRICAL OUTLET MUST NOT BE HIGHER THAN 3" FROM FLOOR IF LOCATED BEHIND THE UNIT OR CAN BE LOCATED IN AN ADJOINING CABINET.





PRODUCT FEATURES

- Nova[™] power burner delivers 15,000 BTUs of intense heat
- Gentle 130° simmer burner
- Full motion grates
- Extra-large convection oven that accommodates a full size 18" x 26" commercial baking sheet
- 1850° Infrared broiler
- · Available in stainless steel only
- · Includes standard island trim backguard
- 24" depth for compatibility with standard kitchen cabinetry

SPECIFICATIONS

Range Dimensions: 35.875"W x 24"D x 36.75"H

Oven Interior: 29"W x 20"D x 15"H
Top Burner Rating: 15,000 BTUs
Simmer Burner Rating: 9,000 BTUs
Oven Burner Rating: 30,000 BTUs
Infrared Broiler Rating: 15,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 1/2"

Installation Clearance: 0" Side Cabinet, 0" Back Wall

MODEL CONFIGURATIONS

Six Burners


RCS366BV2

DESIGN OPTIONS


• Knob color and backguard options (see page 4).

- Casters
- Additional oven rack

ELECTRICAL CORD LOCATED IN BACK OF UNIT LOCATION OF ELECTRICAL OUTLET MUST NOT BE HIGHER THAN 3" FROM FLOOR IF LOCATED BEHIND THE UNIT OR CAN BE LOCATED IN AN ADJOINING CABINET.



RCS30SBV2



PRODUCT FEATURES

- Sealed burner design with up to 18,000 BTUs of power
- · Precise simmer burner
- Extra-large convection oven with 1850° Infrared Broiler
- Accommodates full-size commercial 18" x 26" baking sheet
- 24" depth for compatibility with standard kitchen cabinetry
- · Available in stainless steel only
- · Includes standard island trim backguard

SPECIFICATIONS

Range Dimensions: 29.875"W x 24"D x 36.75"H

Oven Interior: 26.25"W x 20"D x 15"H
Top Burner Rating: 18,000 BTUs
Simmer Burner Rating: 6,000 BTUs
Oven Burner Rating: 30,000 BTUs
Infrared Broiler Rating: 15,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 1/2"

Installation Clearance: 0" Side Cabinet, 0" Back Wall

MODEL CONFIGURATIONS

Four Burners


RCS30SBV2

DESIGN OPTIONS


• Knob color and backguard options (see page 4).


FREESTANDING RANGES

36" SEALED BURNER SERIES



ELECTRICAL CORD LOCATED IN BACK OF UNIT LOCATION OF ELECTRICAL OUTLET MUST NOT BE HIGHER THAN 3" FROM FLOOR IF LOCATED BEHIND THE UNIT OR CAN BE LOCATED IN AN ADJOINING CABINET.





PRODUCT FEATURES

- Sealed burner design with up to 18,000 BTUs of power
- Precise simmer burner
- Extra-large convection oven with 1850° Infrared Broiler
- Accommodates full-size commercial 18" x 26" baking sheet
- 24" depth for compatibility with standard kitchen cabinetry
- · Available in stainless steel only
- · Includes standard island trim backguard

SPECIFICATIONS

Range Dimensions: 35.875"W x 24"D x 36.75"H

Oven Interior: 29"W x 20"D x 15"H Top Burner Rating: 15,000 BTUs Simmer Burner Rating: 6,000 BTUs Oven Burner Rating: 30,000 BTUs Infrared Burner Rating: 15,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 1/2"

Installation Clearance: 0" Side Cabinet, 0" Back Wall

MODEL CONFIGURATIONS

Six Burners

RCS366BSS

DESIGN OPTIONS


• Knob color and backguard options (see page 4).

Notes	





Rangetops

24" PLATINUM RANGETOP SERIES



(MUST CONNECT TO NPT GAS SUPPLY LINE)





PRODUCT FEATURES

- 25,000 BTU PrimaNova[™] burners
- All burners include Interchangeable Griddle Charbroiler
- Gentle 130° simmer burner
- Integrated wok cooking
- · Full motion grates
- Enhanced design that is sleeker and more functional
- 24" depth for compatibility with standard kitchen cabinetry
- Removable, dishwasher-friendly stainless steel drip trays
- · Includes standard island trim backguard

SPECIFICATIONS

Rangetop Dimensions: 23.875"W x 24"D x 8.625"H

Top Burner Rating: 25,000 BTUs **Simmer Burner Rating:** 9,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC


Gas Line Size: 1/2"

Installation Clearance: 0" Side Cabinet, 0" Back Wall

MODEL CONFIGURATIONS


Four Burners with Cast Iron BSPRT244B Interchangeable Griddle/Charbroiler

DESIGN OPTIONS




- 1/2" NPT BOTTOM GAS INLET

(MUST CONNECTTO NPT GAS SUPPLY LINE)



RSPRT304R



PRODUCT FEATURES

- 25,000 BTU PrimaNova[™] burners
- All burners include Interchangeable Griddle Charbroiler
- Gentle 130° simmer burner
- · Integrated wok cooking
- Full motion grates
- Enhanced design that is sleeker and more functional
- 24" depth for compatibility with standard kitchen cabinetry
- Removable, dishwasher-friendly stainless steel drip trays
- · Includes standard island trim backguard

SPECIFICATIONS

Rangetop Dimensions: 29.875"W x 24"D x 8.625"H

Top Burner Rating: 25,000 BTUs **Simmer Burner Rating:** 9,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 1/2"

Installation Clearance: 0" Side Cabinet, 0" Back Wall


MODEL CONFIGURATIONS

Four Burners with Cast Iron Interchangeable Griddle/Charbroiler


BSPRT304B


DESIGN OPTIONS

36" PLATINUM RANGETOP SERIES



- 3/4" NPT BOTTOM GAS INLET
(MUST CONNECT TO NPT GAS SUPPLY LINE)





PRODUCT FEATURES

- 25,000 BTU PrimaNova[™] burners
- All burners include Interchangeable Griddle Charbroiler
- Gentle 130° simmer burner
- · Integrated wok cooking
- · Full motion grates
- Enhanced design that is sleeker and more functional
- 24" depth for compatibility with standard kitchen cabinetry
- Removable, dishwasher-friendly stainless steel drip trays
- · Includes standard island trim backguard

SPECIFICATIONS

Rangetop Dimensions: 35.875"W x 24"D x 8.625"H

Top Burner Rating: 25,000 BTUs **Simmer Burner Rating:** 9,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 1/2"


Installation Clearance: 0" Side Cabinet, 0" Back Wall

MODEL CONFIGURATIONS


Six Burners with Cast Iron BSI Interchangeable Griddle/Charbroiler


BSPRT366B

DESIGN OPTIONS



- 3/4" NPT BOTTOM GAS INLET (MUST CONNECT TO NPT GAS SUPPLY LINE)





PRODUCT FEATURES

- 25,000 BTU PrimaNova[™] burners
- All burners include Interchangeable Griddle Charbroiler
- Gentle 130° simmer burner
- · Integrated wok cooking
- Full motion grates
- Enhanced design that is sleeker and more functional
- 24" depth for compatibility with standard kitchen cabinetry
- Removable, dishwasher-friendly stainless steel drip trays
- · Includes standard island trim backguard

SPECIFICATIONS

Rangetop Dimensions: 47.875"W x 24"D x 8.625"H

Top Burner Rating: 25,000 BTUs **Simmer Burner Rating:** 9,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 3/4"

Installation Clearance: 0" Side Cabinet, 0" Back Wall


MODEL CONFIGURATIONS

Eight Burners with Cast Iron Interchangeable Griddle/Charbroiler

BSPRT488B

DESIGN OPTIONS

60" PLATINUM RANGETOP SERIES




- 3/4" NPT BOTTOM GAS INLET
 (MUST CONNECT TO NPT GAS SUPPLY LINE)
- *-TO FLAMMABLE SURFACE
 OR BOTTOM OF HOOD

 SIDE TRIM MUST BE
 AT LEAST 11/16"
 ABOVE ADJOINING
 COUNTER
 TOP SURFACES

 60" MIN.

 13"
 13"
 18" MIN.

 CLEARANCES



PRODUCT FEATURES

- 25,000 BTU PrimaNova[™] burners
- All burners include Interchangeable Griddle Charbroiler
- Gentle 130° simmer burner
- Integrated wok cooking
- · Full motion grates
- Enhanced design that is sleeker and more functional
- 24" depth for compatibility with standard kitchen cabinetry
- Removable, dishwasher-friendly stainless steel drip trays
- · Includes standard island trim backguard

SPECIFICATIONS

Rangetop Dimensions: 59.875"W x 24"D x 8.625"H

Top Burner Rating: 25,000 BTUs **Simmer Burner Rating:** 9,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC


Gas Line Size: 3/4"

Installation Clearance: 0" Side Cabinet, 0" Back Wall


MODEL CONFIGURATIONS


Six Burners with Cast Iron BSPRT6010B Interchangeable Griddle/Charbroiler


DESIGN OPTIONS



- 1/2" NPT BOTTOM GAS INLET
(MUST CONNECT TO NPT GAS SUPPLY LINE)









RGTNB24BR



RGTNB24FT

PRODUCT FEATURES

- UltraNova[™] power burner delivers 22,000 BTUs of intense heat
- Gentle 130° simmer burner
- Full motion grates
- 1850° Infrared broiler
- Removable, dishwasher-friendly stainless steel drip trays
- Refined design and easier-to-clean cooktop
- 24" depth for compatibility with standard kitchen cabinetry
- · Includes standard island trim backguard

SPECIFICATIONS

Rangetop Dimensions: 23.875"W x 24"D x 8.625"H

Top Burner Rating: 22,000 BTUs Simmer Burner Rating: 9,000 BTUs Griddle Burner Rating: 30,000 BTUs Charbroiler Burner Rating: 30,000 BTUs French Top Burner Rating: 18,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 1/2"

Installation Clearance: 0" Side Cabinet, 0" Back Wall

MODEL CONFIGURATIONS

Four BurnersRGTNB24424" GriddleRGTNB24G24" CharbroilerRGTNB24CBFrench TopRGTNB24FT


DESIGN OPTIONS

• Knob color, trim finish, and backguard options (see page 4).

MODEL OPTIONS


· Griddles, charbroilers, and French tops


30" RNB RANGETOP SERIES



- 1/2" NPT BOTTOM GAS INLET

(MUST CONNECT TO NPT GAS SUPPLY LINE)





PRODUCT FEATURES

- UltraNova[™] power burner delivers 22,000 BTUs of intense heat
- Gentle 130° simmer burner
- Integrated cooktop options include griddles, charbroilers, and French tops
- · Full motion grates
- 1850° Infrared broiler
- Removable, dishwasher-friendly stainless steel drip trays
- · Refined design and easier-to-clean cooktop
- 24" depth for compatibility with standard kitchen cabinetry
- · Includes standard island trim backguard

SPECIFICATIONS

Range Dimensions: 29.875"W x 24"D x 8.625"H

Top Rating: 22,000 BTUs

Simmer Burner Rating: 9,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 1/2"

Installation Clearance: 0" Side Cabinet, 0" Back Wall

MODEL CONFIGURATIONS

Six Burners

RGTNB304BSS

DESIGN OPTIONS

• 1850° Infrared broiler

PRODUCT FEATURES

- Removable, dishwasher-friendly stainless steel drip trays
- · Refined design and easier-to-clean cooktop
- 24" depth for compatibility with standard kitchen cabinetry
- · Includes standard island trim backguard

8 5/8" 8 5/8" 11/2" LOCATION OF ELECTRICAL CORD - LOCATION OF GAS LINE

- 3/4" NPT BOTTOM GAS INLET (MUST CONNECT TO NPT GAS SUPPLY LINE)

SIDE TRIM MUST BE AT LEAST 11/16" ABOVE ADJOINING COUNTER TOP SURFACES 36" MIN. 36" MIN. 75/8" 18" MIN. 36" MAX.

RGTNB366 RGTNB364G SIMMER 15K 15K SIMMER 15K 22K 15K 22K 22K 15K 22K RGTNB364CB RGTNB364FT SIMMER 15K SIMMER 18K

SPECIFICATIONS

Range Dimensions: 35.875"W x 24"D x 8.625"H

Top Burner Rating: 22,000 BTUs Simmer Burner Rating: 9,000 BTUs Griddle Burner Rating: 15,000 BTUs Charbroiler Burner Rating: 15,000 BTUs French Top Burner Rating: 18,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 3/4"

Installation Clearance: 0" Side Cabinet, 0" Back Wall

MODEL CONFIGURATIONS


Six BurnersRGTNB366Four Burners with 12" GriddleRGTNB364GFour Burners with 12" CharbroilerRGNTB364CB

DESIGN OPTIONS

• Knob color, trim finish, and backguard options (see page 4).


RANGETOPS


48" RNB RANGETOP SERIES



- 3/4" NPT BOTTOM GAS INLET

(MUST CONNECT TO NPT GAS SUPPLY LINE)



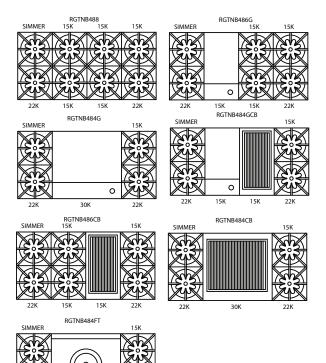

PRODUCT FEATURES

- UltraNova[™] power burner delivers 22,000 BTUs of intense heat
- Gentle 130° simmer burner
- Integrated cooktop options include griddles, charbroilers, and French tops
- · Full motion grates
- 1850° Infrared broiler
- Removable, dishwasher-friendly stainless steel drip trays
- · Refined design and easier-to-clean cooktop
- 24" depth for compatibility with standard kitchen cabinetry
- · Includes standard island trim backguard

SPECIFICATIONS

Range Dimensions: 47.875"W x 24"D x 8.625"H

Top Burner Rating: 22,000 BTUs
Simmer Burner Rating: 9,000 BTUs
12" Griddle Burner Rating: 15,000 BTUs
24" Griddle Burner Rating: 30,000 BTUs
12" Charbroiler Burner Rating: 15,000 BTUs
24" Charbroiler Burner Rating: 30,000 BTUs
French Top Burner Rating: 18,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 3/4"


Installation Clearance: 0" Side Cabinet, 0" Back Wall

MODEL CONFIGURATIONS

Eight Burners RGTNB488
Six Burners with 12" Griddle RGTNB486G
Four Burners with 24" Griddle RGTNB484G
Four Burners with 12" Griddle RGTNB484GCB
& Charbroiler

Six Burners with 12" CharbroilerRGTNB486CBFour Burners with 24" CharbroilerRGTNB484CBFour Burners with French TopRGTNB484FT

DESIGN OPTIONS



- 3/4" NPT BOTTOM GAS INLET
- SIDETRIM MUST BE
 AT LEAST 11/16*

 60° MIN.

 13"


 13"

 13"

 14"

 18" MIN.

 16" MAX.

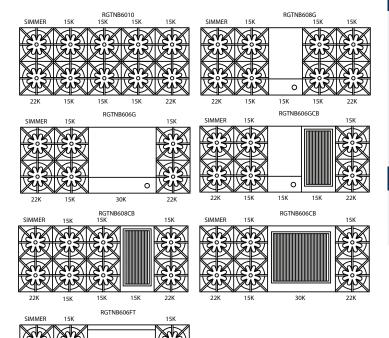

- UltraNova[™] power burner delivers 22,000 BTUs of intense heat
- Gentle 130° simmer burner
- Integrated cooktop options include griddles, charbroilers, and French tops
- · Full motion grates
- 1850° Infrared broiler
- Removable, dishwasher-friendly stainless steel drip trays
- · Refined design and easier-to-clean cooktop
- 24" depth for compatibility with standard kitchen cabinetry
- · Includes standard island trim backguard

SPECIFICATIONS

Range Dimensions: 59.875"W x 24"D x 8.625"H

Top Burner Rating: 22,000 BTUs
Simmer Burner Rating: 9,000 BTUs
12" Griddle Burner Rating: 15,000 BTUs
24" Griddle Burner Rating: 30,000 BTUs
12" Charbroiler Burner Rating: 15,000 BTUs
24" Charbroiler Burner Rating: 30,000 BTUs
French Top Burner Rating: 18,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH (Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 3/4"

Installation Clearance: 0" Side Cabinet, 0" Back Wall

MODEL CONFIGURATIONS

Ten Burners RGTNB6010

Eight Burners with 12" Griddle RGTNB608G

Six Burners with 24" Griddle RGTNB606G


Six Burners with 12" Griddle RGTNB606GCB

& Charbroiler

Eight Burners with 12" Charbroiler RGTNB608CB
Six Burners with 24" Charbroiler RGTNB606CB
Six Burners with French Top RGTNB606FT


DESIGN OPTIONS


36" HERITAGE CLASSIC RANGETOP



- LOCATION OF GAS LINE
- 3/4" NPT BOTTOM GAS INLET

(MUST CONNECT TO NPT GAS SUPPLY LINE)





PRODUCT FEATURES

- 22,000 BTU UltraNova[™] burners
- Gentle 130° simmer burner
- · Full motion grates
- Includes 12" raised griddle/broiler for melting and edge-browning
- · Full motion grates
- Removable, dishwasher friendly stainless steel drip trays
- · Refined design and easier-to-clean cooktop
- 24" depth for compatibility with standard kitchen cabinetry
- Available backguard options: 17" or 24"
- · Raised griddle available only on right side

SPECIFICATIONS

Rangetop Dimensions: 35.875"W x 27.25"D x 29.625"H

Top Burner Rating: 22,000 BTUs **Simmer Burner Rating:** 9,000 BTUs

Raised Griddle/Broiler Burner Rating: 15,000 BTUs Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 3/4"


Installation Clearance: 0" Side Cabinet, 0" Back Wall

MODEL CONFIGURATIONS


Four Burners with Griddle/Broiler


RGTNB364GHCV2

DESIGN OPTIONS



- 3/4" NPT BOTTOM GAS INLET (MUST CONNECT TO NPT GAS SUPPLY LINE)





PRODUCT FEATURES

- 22,000 BTU UltraNova[™] burners
- Gentle 130° simmer burner
- Full motion grates
- Includes 12" raised griddle/broiler for melting and edge-browning
- Full motion grates
- Removable, dishwasher friendly stainless steel drip trays
- · Refined design and easier-to-clean cooktop
- 24" depth for compatibility with standard kitchen cabinetry
- · Available backguard options: 17" or 24"
- · Raised griddle available only on right side

SPECIFICATIONS

Rangetop Dimensions: 47.875"W x 27.25"D x 29.625"H

Top Burner Rating: 22,000 BTUs **Simmer Burner Rating:** 9,000 BTUs

Raised Griddle/Broiler Burner Rating: 15,000 BTUs Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 3/4"

Installation Clearance: 0" Side Cabinet, 0" Back Wall


MODEL CONFIGURATIONS

Six Burners with Griddle/Broiler


RGTNB486GHCV2


DESIGN OPTIONS

60" HERITAGE CLASSIC RANGETOP



- LOCATION OF GAS LINE
 3/4" NPT BOTTOM GAS INLET
- (MUST CONNECT TO NPT GAS SUPPLY LINE)





PRODUCT FEATURES

- 22,000 BTU UltraNova[™] burners
- Gentle 130° simmer burner
- · Full motion grates
- Includes 12" raised griddle/broiler for melting and edge-browning
- · Full motion grates
- Removable, dishwasher friendly stainless steel drip trays
- · Refined design and easier-to-clean cooktop
- 24" depth for compatibility with standard kitchen cabinetry
- Available backguard options: 17" or 24"
- · Raised griddle available only on right side

SPECIFICATIONS

Rangetop Dimensions: 59.875"W x 27.25"D x 29.625"H

Top Burner Rating: 22,000 BTUs **Simmer Burner Rating:** 9,000 BTUs

Raised Griddle/Broiler Burner Rating: 30,000 BTUs Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

(Unit must be on a Non-GFI, dedicated outlet)

Gas Line Size: 3/4"

Installation Clearance: 0" Side Cabinet, 0" Back Wall

MODEL CONFIGURATIONS

Six Burners
with Griddle/Broiler

RGTNB606GHCV2


DESIGN OPTIONS


Notes	




Cooktops

30" COOKTOP







PRODUCT FEATURES

- UltraNova[™] power burner delivers 22,000
 BTUs of intense heat
- Gentle 130° simmer burner
- · Full motion grates
- · Streamlined design
- · Stainless steel knobs and available customization
- Enhanced compatibility with BlueStar Electric Wall Oven
- Easier to clean

SPECIFICATIONS

Cooktop Dimensions: 30"W x 22"D x 5"H

Top Burner Rating: 22,000 BTU **Simmer Burner Rating:** 9,000 BTU

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 1/2"


MODEL CONFIGURATIONS


Four Burners

RBCT304BV2


DESIGN OPTIONS

Knob color (see page 4).

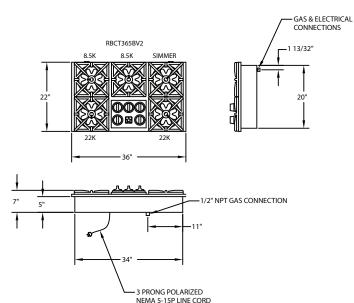



120V AC ELECTRICAL CONNECTION



PRODUCT FEATURES

- UltraNova[™] power burner delivers 22,000 BTUs of intense heat
- Gentle 130° simmer burner
- Full motion grates
- · Streamlined design
- Stainless steel knobs and available customization
- Enhanced compatibility with BlueStar Electric Wall Oven
- · Easier to clean

SPECIFICATIONS

Cooktop Dimensions: 36"W x 22"D x 5"H

Top Burner Rating: 22,000 BTU **Simmer Burner Rating:** 9,000 BTU

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 1/2"

MODEL CONFIGURATIONS

Five Burners

RBCT365BV2

DESIGN OPTIONS


• Knob color (see page 4).


Notes	




Wall Ovens

24" SINGLE GAS WALL OVEN







PRODUCT FEATURES

- Powerful 25,000 BTU oven burner with 3,000 BTU heat assist for quick start-ups
- Extra-large convection oven with True European Convection and 1850° Infrared broiler
- · Largest oven capacity available on a 24" wall oven
- Accommodates half-size commercial 18" x 13" baking sheet
- Coved corners for optimal heat circulation and easier cleaning
- · High visibility dual halogen oven lights
- · Features swing door design
- · Available in 750+ colors and finishes
- · Available in both single or double versions

SPECIFICATIONS

Single Oven Dimensions: 24"W x 23"D x 32.75"H

Oven Interior: 20.25"W x 20"D x 15"H Oven Burner Rating: 25,000 BTUs Infrared Broiler Rating: 15,000 BTUs Oven Heat Assist Element: 3,000 BTUs Single Oven Electrical Requirements:

120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 1/2"

MODEL CONFIGURATIONS


Single Gas Wall Oven


BWO24AGS

DESIGN OPTIONS

• Oven color, knob color, trim finish, door swing options (see page 4).

- Left or right swing door
- · Additional oven rack
- · Full extension oven rack



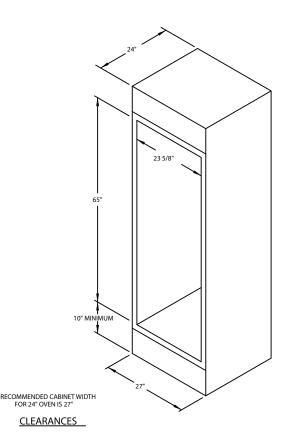

- Powerful 25,000 BTU oven burner with 3,000 BTU heat assist for quick start-ups
- Extra-large convection oven with True European Convection and 1850° Infrared broiler
- · Largest oven capacity available on a 24" wall oven
- Accommodates half-size commercial 18" x 13" baking sheet
- Coved corners for optimal heat circulation and easier cleaning
- · High visibility dual halogen oven lights
- · Features swing door design
- · Available in 750+ colors and finishes
- · Available in both single or double versions

SPECIFICATIONS

Double Oven Dimensions: 24"W x 23"D x 65.5"H

Oven Interior: 20.25"W x 20"D x 15"H Oven Burner Rating: 25,000 BTUs Infrared Broiler Rating: 15,000 BTUs Oven Heat Assist Element: 3,000 BTUs Double Oven Electrical Requirements:

120V, 60Hz, 20 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 1/2"

MODEL CONFIGURATIONS

Double Gas Wall Oven

BWO24AGS

DESIGN OPTIONS


• Oven color, knob color, trim finish, door swing options (see page 4).


MODEL OPTIONS


- · Left or right swing door
- · Additional oven rack
- · Full extension oven rack

WALL OVENS

30" SINGLE GAS WALL OVEN



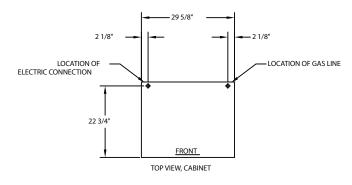



CLEARANCES

PRODUCT FEATURES

- Powerful 25,000 BTU oven burner with 3,000 BTU heat assist for quick start-ups
- Extra-large convection oven with True European Convection and 1850° Infrared broiler
- · Largest oven capacity available on a 30" wall oven
- Accommodates full-size commercial 18" x 26" baking sheet
- Coved corners for optimal heat circulation and easier cleaning
- · High visibility dual halogen oven lights
- · Features swing door design
- · Available in 750+ colors and finishes
- · Available in both single or double versions

SPECIFICATIONS

Single Oven Dimensions: 30"W x 26"D x 32.75"H

Oven Interior: 26.25"W x 20"D x 15"H Oven Burner Rating: 25,000 BTUs Infrared Broiler Rating: 15,000 BTUs Oven Heat Assist Element: 3,000 BTUs Single Oven Electrical Requirements:

120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 1/2"

MODEL CONFIGURATIONS


Single Gas Wall Oven


BWO30AGS

DESIGN OPTIONS

• Oven color, knob color, trim finish (see page 4).

- · Additional oven rack
- · Full extension oven rack

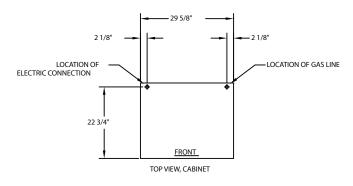

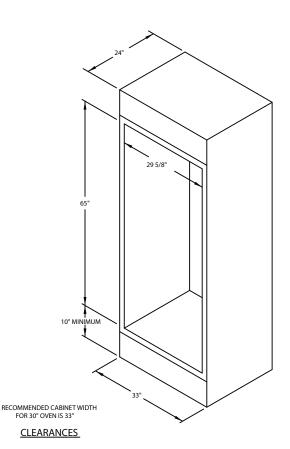

- Powerful 25,000 BTU oven burner with 3,000 BTU heat assist for quick start-ups
- Extra-large convection oven with True European Convection and 1850° Infrared broiler
- · Largest oven capacity available on a 30" wall oven
- Accommodates full-size commercial 18" x 26" baking sheet
- Coved corners for optimal heat circulation and easier cleaning
- · High visibility dual halogen oven lights
- · Features French door design
- · Available in 750+ colors and finishes
- · Available in both single or double versions

SPECIFICATIONS

Double Oven Dimensions: 30"W x 26"D x 65.5"H

Oven Interior: 26.25"W x 20"D x 15"H
Oven Burner Rating: 25,000 BTUs
Infrared Broiler Rating: 15,000 BTUs
Oven Heat Assist Element: 3,000 BTUs
Double Oven Electrical Requirements:

120V, 60Hz, 20 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 1/2"

MODEL CONFIGURATIONS

Double Gas Wall Oven

BWO30AGS

DESIGN OPTIONS


• Oven color, knob color, trim finish (see page 4).


MODEL OPTIONS


- Additional oven rack
- Full extension oven rack

WALL OVENS

36" SINGLE GAS WALL OVEN



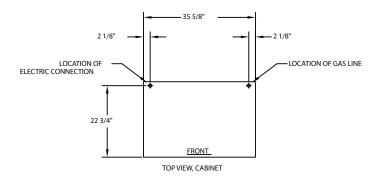

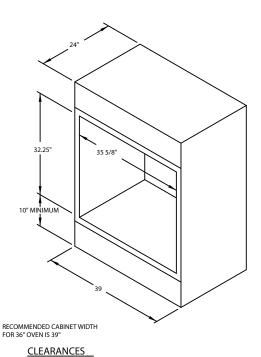

PRODUCT FEATURES

- Powerful 25,000 BTU oven burner with 3,000 BTU heat assist for quick start-ups
- Extra-large convection oven with True European Convection and 1850° Infrared broiler
- · Largest oven capacity available on a 36" wall oven
- Accommodates full-size commercial 18" x 26" baking sheet
- Coved corners for optimal heat circulation and easier cleaning
- · High visibility dual halogen oven lights
- · Features French door design
- · Available in 750+ colors and finishes
- · Available in both single or double versions

SPECIFICATIONS

Single Oven Dimensions: 36"W x 26"D x 32.75"H

Oven Interior: 29"W x 20"D x 15"H Oven Burner Rating: 25,000 BTUs Infrared Broiler Rating: 15,000 BTUs Oven Heat Assist Element: 3,000 BTUs Single Oven Electrical Requirements:

120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 1/2"

MODEL CONFIGURATIONS


Single Gas Wall Oven

BWO36AGS

DESIGN PREFERENCES

• Oven color, knob color, trim finish (see page 4).

- · Additional oven rack
- · Full extension oven rack

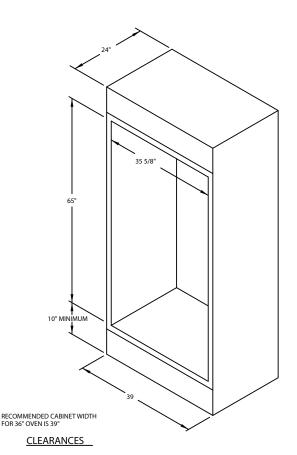

- Powerful 25,000 BTU oven burner with 3,000 BTU heat assist for quick start-ups
- Extra-large convection oven with True European Convection and 1850° Infrared broiler
- · Largest oven capacity available on a 36" wall oven
- Accommodates full-size commercial 18" x 26" baking sheet
- Coved corners for optimal heat circulation and easier cleaning
- · High visibility dual halogen oven lights
- · Features French door design
- · Available in 750+ colors and finishes
- · Available in both single or double versions

SPECIFICATIONS

Double Oven Dimensions: 36"W x 23"D x 65.5"H

Oven Interior: 29"W x 20"D x 15"H
Oven Burner Rating: 25,000 BTUs
Infrared Broiler Rating: 15,000 BTUs
Oven Heat Assist Element: 3,000 BTUs
Double Oven Electrical Requirements:

120V, 60Hz, 20 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 1/2"

MODEL CONFIGURATIONS

Double Gas Wall Oven

BWO36AGS

DESIGN OPTIONS

· Oven color, knob color, trim finish (see page 4).


MODEL OPTIONS


- · Additional oven rack
- · Full extension oven rack


WALL OVENS

30" SINGLE ELECTRIC WALL OVEN

French Door







PRODUCT FEATURES

- Powerful 2,500 watt bake element plus 1,800 watt heat assist for faster preheat
- · Commercial-grade intense 5,000 watt Infrared Broiler
- Built-in artisan baking stone with precise temperature control
- Extra-large oven with True European Convection
- Intuitive touch screen control panel with 12 cooking modes
- Precision temperature probe that provides perfect temperature control
- Eco-friendly Continu Clean[™] features continuously cleans the oven capacity
- · Gentle self cleaning cycle
- · Features French door design
- · Available in 750+ colors and finishes
- · Available in both single or double versions

SPECIFICATIONS

Single Oven Dimensions: 30"W x 25.875"D x 27.5"H

Oven Interior: 26.25"W x 20"D x 15"H
Oven Bake Element Rating: 2,600 Watts
Oven Broiler Element Rating: 5000 Watts
Oven Heat Assist Element: 1,800 Watts

Electrical Requirements: 240V, 60Hz, 24 AMPS, 1 PH (*Unit must be on a Non-GFI, dedicated outlet*)

MODEL CONFIGURATIONS

Single Electric Wall Oven

EWO30ECSD


DESIGN OPTIONS


• Oven color, knob color, trim finish (see page 4).


- · Additional oven rack
- · Full extension oven rack

30" STACKED ELECTRIC WALL OVEN

French Door





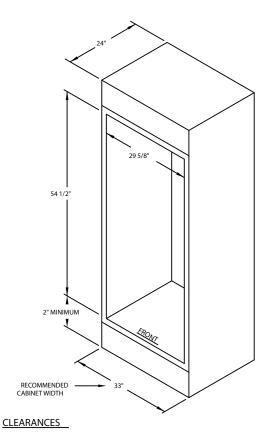

PRODUCT FEATURES

- Powerful 2,500 watt bake element plus 1,800 watt heat assist for faster preheat
- Commercial-grade intense 5,000 watt Infrared Broiler
- Built-in artisan baking stone with precise temperature control
- Extra-large oven with True European Convection
- Intuitive touch screen control panel with 12 cooking modes
- Precision temperature probe that provides perfect temperature control
- Eco-friendly Continu Clean[™] features continuously cleans the oven capacity
- · Gentle self cleaning cycle
- · Features French door design
- Available in 750+ colors and finishes
- · Available in both single or double versions

SPECIFICATIONS

Double Oven Dimensions: 30"W x 25.875"D x 55"H

Oven Interior: 26.25"W x 20"D x 15"H
Oven Bake Element Rating: 2,600 Watts
Oven Broiler Element Rating: 5000 Watts
Oven Heat Assist Element: 1,800 Watts

Electrical Requirements: 240V, 60Hz, 24 AMPS, 1 PH (*Unit must be on a Non-GFI, dedicated outlet*)

MODEL CONFIGURATIONS

Double Electric Wall Oven

EWO30ECSD


DESIGN OPTIONS


· Oven color, knob color, trim finish (see page 4).


- · Additional oven rack
- · Full extension oven rack

30" SINGLE ELECTRIC WALL OVEN

Drop Down Door







PRODUCT FEATURES

- Powerful 2,500 watt bake element plus 1,800 watt heat assist for faster preheat
- · Commercial-grade intense 5,000 watt Infrared Broiler
- Built-in artisan baking stone with precise temperature control
- Extra-large oven with True European Convection
- Intuitive touch screen control panel with 12 cooking modes
- Precision temperature probe that provides perfect temperature control
- Eco-friendly Continu Clean™ features continuously cleans the oven capacity
- · Gentle self cleaning cycle
- · Available in 750+ colors and finishes
- Available in both single or double versions

SPECIFICATIONS

Single Oven Dimensions: 30"W x 25.875"D x 27.75"H

Oven Interior: 26.25"W x 20"D x 15"H

Oven Bake Element Rating: 2,600 Watts

Oven Broiler Element Rating: 5000 Watts

Oven Heat Assist Element: 1,800 Watts

Electrical Requirements: 240V, 60Hz, 24 AMPS, 1 PH (*Unit must be on a Non-GFI, dedicated outlet*)

(Office finds) be off a Non-GFT, dedicated outle

Single Electric Wall Oven

MODEL CONFIGURATIONS

EWO30ECDD


DESIGN OPTIONS


• Oven color, knob color, trim finish (see page 4).


- · Additional oven rack
- Full extension oven rack

30" DOUBLE ELECTRIC WALL OVEN

Drop Down Door





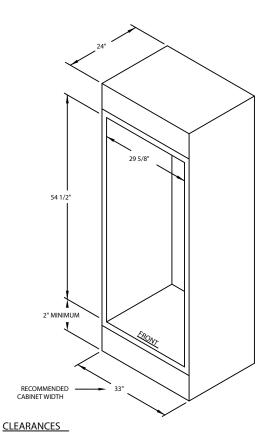

PRODUCT FEATURES

- Powerful 2,500 watt bake element plus 1,800 watt heat assist for faster preheat
- · Commercial-grade intense 5,000 watt Infrared Broiler
- Built-in artisan baking stone with precise temperature control
- Extra-large oven with True European Convection
- Intuitive touch screen control panel with 12 cooking modes
- Precision temperature probe that provides perfect temperature control
- Eco-friendly Continu Clean[™] features continuously cleans the oven capacity
- · Gentle self cleaning cycle
- Available in 750+ colors and finishes
- Available in both single or double versions

SPECIFICATIONS

Double Oven Dimensions: 30"W x 25.875"D x 55"H

Oven Interior: 26.25"W x 20"D x 15"H
Oven Bake Element Rating: 2,600 Watts
Oven Broiler Element Rating: 5000 Watts
Oven Heat Assist Element: 1,800 Watts
Electrical Requirements Each Oven:

240V, 60Hz, 24 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

MODEL CONFIGURATIONS

Double Electric Wall Oven


EWO30ECDD


DESIGN OPTIONS


· Oven color, knob color, trim finish (see page 4).


- · Additional oven rack
- Full extension oven rack


SALAMANDER BROILER











PRODUCT FEATURES

- Heavy-duty, commercial stainless steel construction
- Two independently controlled 11,000 BTU infrared ceramic burners
- 215 square inches of cooking space
- Large removable heavy-duty grilling rack
- · Automatic electronic ignition and re-ignition system

SPECIFICATIONS

Product Dimensions: 25"W x 15"D x 14.625"H

Top Burner Rating: 11,000 BTU

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)


Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC


Gas Line Size: 1/2"


MODEL CONFIGURATIONS

Two Independently Controlled Infrared Burners

PRZSAL24







- Heavy-duty, commercial stainless steel construction
- Two 15,000 BTU stainless steel commercial U-burners
- Push-to-turn burner controls
- · Cast iron, easy clean grates
- Removable, dishwasher-friendly stainless steel drip trays

SPECIFICATIONS

Cooktop Dimensions: 29.875"W x 24"D x 9.75"H

Charbroiler Rating: 30,000 BTU

Electrical Requirements: 120V, 60Hz, 15 AMPS, 1 PH (*Unit must be on a Non-GFI, dedicated outlet*)

Operating Gas Pressure: NAT: 5.0" WC, LP: 10.0" WC

Gas Line Size: 1/2"

MODEL CONFIGURATIONS

30" Charbroiler Burners

PRZIDCB30

DESIGN OPTIONS


• Knob color (see page 4).

Notes		




Ventilation


PRO-LINE WALL HOOD

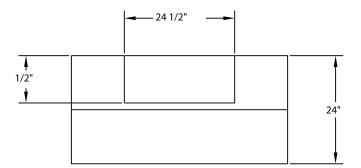


TOP VIEW



FRONT VIEW



RT SIDE VIEW



BACK VIEW


PRODUCT FEATURES

- Available in 30", 36", 42", 48", 54", 60", and 66"
 width sizes
- 42" and larger sizes available in 1200CFM only
- Commercial grade 18 gauge 300 stainless steel construction
- · Welded seamless corners
- · Dishwasher safe stainless steel baffle filters
- 3 speed blower control
- · Halogen lamps with dimmer control
- · Reversible top or rear exhaust
- · Hidden control knobs
- Quiet performance
- · Largest filtered capture in the industry
- 30" and 36" models available in 600 or 1200CFM


BLOWER OPTIONS


In-Hood: 300, 600, and 1200CFM
In-Line: 300, 600, and 1200CFM
Remote: 1000 and 1400CFM


- 750+ colors and finishes (see page 4).
- Brushed Brass and Brushed Copper (see page 4).



FRONT VIEW







TOP VIEW

PRODUCT FEATURES


- Available in 30", 36", 42", 48", 54", 60", and 66"
 width sizes
- 30" model available in 600CFM.36" and 42" models available in 600 or 1200CFM
- 48" and larger sizes available in 1200 CFM
- Commercial grade 18 gauge 300 stainless steel construction
- · Welded seamless corners
- Dishwasher safe stainless steel baffle filters
- 3-speed blower control
- · Halogen lamps with dimmer control
- Top exhaust; can be ducted to the rear with use of 90° elbow (not included)
- · Hidden control knobs
- Quiet performances
- Includes flue that accommodates most 9 ft. ceilings.

BLOWER OPTIONS


In-Hood: 300, 600, and 1200CFM
In-Line: 300, 600, and 1200CFM
Remote: 1000 and 1400CFM

- 750+ colors and finishes (see page 4).
- Brushed Brass and Brushed Copper (see page 4).


LOW PROFILE WALL HOOD




TOP VIEW



FRONT VIEW



STDANDARD TOP EXHAUST



RT SIDE VIEW

PRODUCT FEATURES

- Available in 24", 30", and 36" width sizes
- · Compatible with 600 CFM internal blower
- Commercial grade 18 gauge 300 stainless steel construction
- · Welded seamless corners
- · Dishwasher safe stainless steel baffle filters
- · Variable blower control
- · Halogen lamps with dimmer control
- · Reversible top or rear exhaust
- · Hidden control knobs
- Quiet performance
- · Hood flue
- Recirculating kit available on 30", 36", 42", and 48"


BLOWER OPTIONS

• In-Hood: 300 and 600

In-Line: 300, 600, and 1200CFMRemote: 1000 and 1400CFM

- 750+ colors and finishes (see page 4).
- Brushed Brass and Brushed Copper (see page 4).

BONANZA WALL HOOD

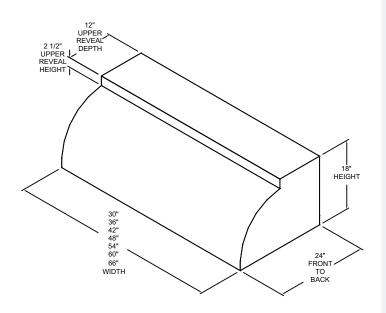


PRODUCT FEATURES

- Available in 30", 36", 42", 48", 54", 60", and 66"
 width sizes
- Handcrafted seamless construction with 16 gauge material
- Commercial style stainless steel baffle filter system
- Available in 750+ colors or Brushed Copper and Brushed Brass finishes
- Stainless steel internal liner with double wall construction
- · 3 speed fan control
- · Halogen lamps
- · Accommodates top or rear discharge
- 30" and 36" models include a 300 or 600CFM in-hood blower
- · Remote and In-line fans available
- Recirculating kit available on 30", 36", 42", and 48"

BLOWER OPTIONS

In-Hood: 300, 600, and 1200CFM
In-Line: 300, 600, and 1200CFM
Remote: 1000 and 1400CFM

- 750+ colors and finishes (see page 4).
- Brushed Brass and Brushed Copper (see page 4).

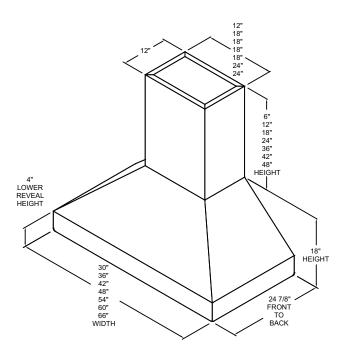

- Available in 30", 36", 42", 48", 54", 60", and 66"
 width sizes
- Handcrafted seamless construction with 16 gauge material
- Commercial style stainless steel baffle filter system
- Available in 750+ colors or Brushed Copper and Brushed Brass finishes
- Stainless steel internal liner with double wall construction
- 3 speed fan control
- Halogen lamps
- 30" and 36" accommodates top discharge only.
 Over 42" specify top or rear discharge
- · Remote and In-line fans available
- Recirculating kit available on 30", 36", 42", and 48"
- 30" and 36" models include 300 or 600CFM in-hood blower
- Included duct heights: 6", 12", 18", 24" and 30"

BLOWER OPTIONS

- In-Hood: 300, 600, and 1200CFM
 In-Line: 300, 600, and 1200CFM
- Remote: 1000 and 1400CFM

- 750+ colors and finishes (see page 4).
- Brushed Brass and Brushed Copper (see page 4).

PRODUCT FEATURES


- 3 speed fan control
- Halogen lamps
- Accommodates top or rear discharge
- \bullet Recirculating kit available on 30", 36", 42", and 48"
- 30" and 36" models include a 300 or 600CFM in-hood blower

BLOWER OPTIONS

In-Hood: 300, 600, and 1200CFMIn-Line: 300, 600, and 1200CFMRemote: 1000 and 1400CFM

- 750+ colors and finishes
- Brushed Brass and Brushed Copper

LARAMIE WALL HOOD

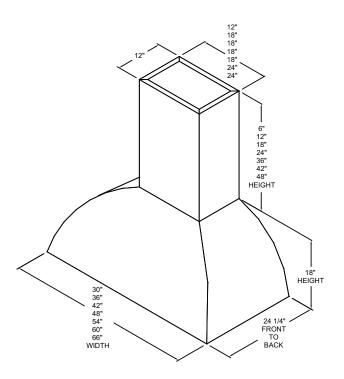

PRODUCT FEATURES

- Available in 30", 36", 42", 48", 54", 60", and 66"
 width sizes
- Handcrafted seamless construction with 16 gauge material
- Commercial style stainless steel baffle filter system
- Available in 750+ colors or Brushed Copper and Brushed Brass finishes
- Stainless steel internal liner with double wall construction
- · 3 speed fan control
- Halogen lamps
- 30" and 36" accommodates top discharge only. Over 42" specify top or rear discharge
- 30" and 36" models include a 300 or 600CFM in-hood blower
- Included duct heights: 6", 12", 18", 24" and 30"
- Recirculating kit available on 30", 36", 42", and 48"

BLOWER OPTIONS

In-Hood: 300, 600, and 1200CFM
In-Line: 300, 600, and 1200CFM
Remote: 1000 and 1400CFM

- 750+ colors and finishes (see page 4).
- Brushed Brass and Brushed Copper (see page 4).


- Handcrafted seamless construction with 16 gauge material
- · Commercial style stainless steel baffle filter system
- Available in 750+ colors or Brushed Copper and Brushed Brass finishes
- Stainless steel internal liner with double wall construction
- · 3 speed fan control
- · Halogen lamps
- · Accommodates top discharge only
- · Remote and In-line fans available
- Recirculating kit available on 30", 36", 42", and 48"
- 30" and 36" models include a 300 or 600CFM in-hood blower
- Included duct heights: 6", 12", 18", 24", and 30"

BLOWER OPTIONS

In-Hood: 300, 600, and 1200CFM
In-Line: 300, 600, and 1200CFM
Remote: 1000 and 1400CFM

- 750+ colors and finishes (see page 4).
- Brushed Brass and Brushed Copper (see page 4).

LONDON FLAT WALL HOOD

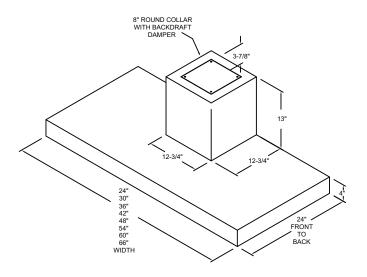


PRODUCT FEATURES

- Available in 24", 30", 36", 42", 48", 54", 60", and 66"
 width sizes
- · Handcrafted seamless construction
- · Anodized aluminum mesh filter system
- Available in 750+ colors or Brushed Copper and Brushed Brass finishes
- 3 speed fan control
- Halogen lamps
- · Accommodates top discharge only
- · Remote and In-line fans available
- 24", 30", and 36" models include a 300 or 600CFM in-hood blower

BLOWER OPTIONS

- In-Hood: 300, 600, and 1200CFMIn-Line: 300, 600, and 1200CFM
- Remote: 1000 and 1400CFM

- 750+ colors and finishes (see page 4).
- Brushed Brass and Brushed Copper (see page 4).

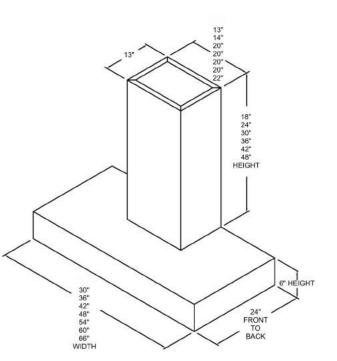

PRODUCT FEATURES

- Available in 30", 36", 42", 48", 54", 60", and 66"
 width sizes
- Handcrafted seamless construction with 16 gauge material
- · Commercial style stainless steel baffle filter system
- Available in 750+ colors or Brushed Copper and Brushed Brass finishes
- Stainless steel internal liner with double wall construction
- · 3 speed fan control
- · Halogen lamps
- · Accommodates top discharge only
- · Remote and In-line fans available
- 24", 30", and 36" models include a 300 or 600CFM in-hood blower
- · Included duct heights: 18", 24", and 30"


BLOWER OPTIONS

In-Hood: 300, 600, and 1200CFM
In-Line: 300, 600, and 1200CFM
Remote: 1000 and 1400CFM

DESIGN OPTIONS

30", 36", 42", 48", 54", 60", and 66" Brushed Copper (see page 4).

POPLAR WALL HOOD



PRODUCT FEATURES

- Available in 30", 36", 42", 48", 54", 60", and 66"
 width sizes
- Handcrafted seamless construction with 16 gauge material
- Commercial style stainless steel baffle filter system
- Available in 750+ colors or Brushed Copper and Brushed Brass finishes
- Stainless steel internal liner with double wall construction
- · 3 speed fan control
- Halogen lamps
- · Accommodates top or rear discharge
- · Remote and In-line fans available
- 30" and 36" models include a 300 or 600CFM in-hood blower

BLOWER OPTIONS

In-Hood: 300, 600, and 1200CFM
In-Line: 300, 600, and 1200CFM
Remote: 1000 and 1400CFM

- 750+ colors and finishes (see page 4).
- Brushed Brass and Brushed Copper (see page 4).

4" LOWER REVEAL HEIGHT 18" HEIGHT 30" 36" 42" 48" 54" 60" 66" WIDTH 24" FRONT TO

BACK

SANTA FE WALL HOOD

PRODUCT FEATURES


- Available in 30", 36", 42", 48", 54", 60", and 66" width sizes
- · Handcrafted seamless construction with 16 gauge material
- · Commercial style stainless steel baffle filter system
- Available in 750+ colors or Brushed Copper and Brushed Brass finishes
- · Stainless steel internal liner with double wall construction
- · 3 speed fan control
- Halogen lamps
- · Accommodates top or rear discharge
- · Remote and In-line fans available
- Recirculating kit available on 30", 36", 42", and 48"
- 30" and 36" models include a 300 or 600CFM in-hood blower

BLOWER OPTIONS

• In-Hood: 300, 600, and 1200CFM • In-Line: 300, 600, and 1200CFM · Remote: 1000 and 1400CFM

- 750+ colors and finishes (see page 4).
- Brushed Brass and Brushed Copper (see page 4).

WRANGLER WALL HOOD

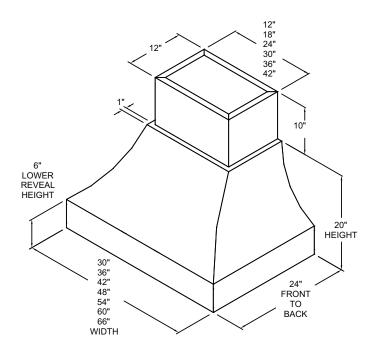

PRODUCT FEATURES

- Available in 30", 36", 42", 48", 54", 60", and 66"
 width sizes
- Handcrafted seamless construction with 16 gauge material
- Commercial style stainless steel baffle filter system
- Available in 750+ colors or Brushed Copper and Brushed Brass finishes
- Stainless steel internal liner with double wall construction
- · 3 speed fan control
- Halogen lamps
- 30" and 36" accommodates top discharge only.
 Over 42" specify top or rear discharge
- · Remote and In-line fans available
- 30" and 36" models include a 300 or 600CFM in-hood blower
- Included duct heights: 10", 16", 22", and 28"

BLOWER OPTIONS

In-Hood: 300, 600, and 1200CFM
In-Line: 300, 600, and 1200CFM
Remote: 1000 and 1400CFM

- 750+ colors and finishes (see page 4).
- Brushed Brass and Brushed Copper (see page 4).


- Available in 30", 36", 42", 48", 54", 60", and 66" width sizes
- · Handcrafted seamless construction with 16 gauge material
- · Commercial style stainless steel baffle filter system
- Available in 750+ colors or Brushed Copper and Brushed Brass finishes
- · Stainless steel internal liner with double wall construction
- · 3 speed fan control
- Halogen lamps
- · Accommodates top discharge only
- 30" and 36" models include a 300 or 600CFM in-hood blower
- · Remote and In-line fans available
- Included duct heights: 6", 12", 18", 24", and 30"

BLOWER OPTIONS

• In-Hood: 300, 600, and 1200CFM • In-Line: 300, 600, and 1200CFM • Remote: 1000 and 1400CFM

- 750+ colors and finishes (see page 4).
- Brushed Brass and Brushed Copper (see page 4).

LARAMIE ISLAND HOOD

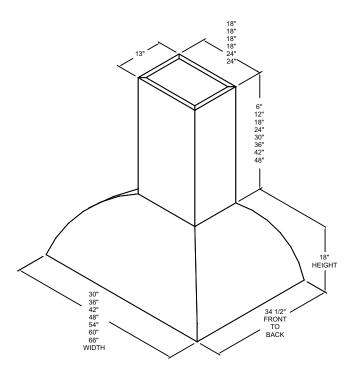

PRODUCT FEATURES

- Available in 30", 36", 42", 48", 54", 60", and 66"
 width sizes
- Handcrafted seamless construction with 16 gauge material
- Commercial style stainless steel baffle filter system
- Available in 750+ colors or Brushed Copper and Brushed Brass finishes
- Stainless steel internal liner with double wall construction
- · 3 speed fan control
- Halogen lamps
- · Accommodates top discharge only
- 30" and 36" models include a 300 or 600CFM in-hood blower
- · Remote and In-line fans available
- Included duct heights: 6", 12", 18", 24", and 30"

BLOWER OPTIONS

In-Hood: 300, 600, and 1200CFM
In-Line: 300, 600, and 1200CFM
Remote: 1000 and 1400CFM

- 750+ colors and finishes (see page 4).
- Brushed Brass and Brushed Copper (see page 4).


- Available in 30", 36", 42", 48", 54", 60", and 66"
 width sizes
- Handcrafted seamless construction with 16 gauge material
- Commercial style stainless steel baffle filter system
- Available in 750+ colors or Brushed Copper and Brushed Brass finishes
- Stainless steel internal liner with double wall construction
- · 3 speed fan control
- Halogen lamps
- · Accommodates top discharge only
- 30" and 36" models include a 300 or 600CFM in-hood blower
- · Remote and In-line fans available
- Included duct heights: 6", 12", 18", 24", and 30"

BLOWER OPTIONS

In-Hood: 300, 600, and 1200CFM
In-Line: 300, 600, and 1200CFM
Remote: 1000 and 1400CFM

- 750+ colors and finishes (see page 4).
- Brushed Brass and Brushed Copper (see page 4).

MANHATTAN ISLAND HOOD

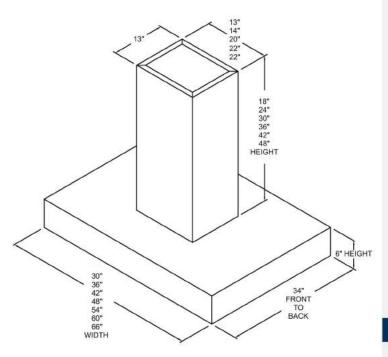

PRODUCT FEATURES


- Available in 30", 36", 42", 48", 54", 60", and 66"
 width sizes
- Handcrafted seamless construction with 16 gauge material
- · Commercial style stainless steel baffle filter system
- Available in 750+ colors or Brushed Copper and Brushed Brass finishes
- Stainless steel internal liner with double wall construction
- · 3 speed fan control
- · Halogen lamps
- · Accommodates top discharge only
- 30" and 36" models include a 300 or 600CFM in-hood blower
- · Remote and In-line fans available
- · Included duct heights: 18", 24", and 30"

BLOWER OPTIONS

In-Hood: 300, 600, and 1200CFM
In-Line: 300, 600, and 1200CFM
Remote: 1000 and 1400CFM

- 750+ colors and finishes (see page 4).
- Brushed Brass and Brushed Copper (see page 4).

MLSS LINER

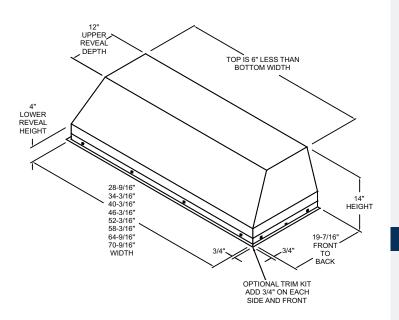


PRODUCT FEATURES

- Available in 28", 34", 40", 46", 52", 58", 64", and 70"
 width sizes
- Seamed construction
- 3 speed fan control
- · High heat sensor
- · Stainless steel baffle filters
- · Non-mirrored, finished edges
- · Accommodates top or rear discharge
- 28" and 34" models include a 300 or 600CFM in-hood blower
- · Remote and In-line fans available

BLOWER OPTIONS

In-Hood: 300, 600, and 1200CFM
In-Line: 300, 600, and 1200CFM
Remote: 1000 and 1400CFM

PMLSS LINER

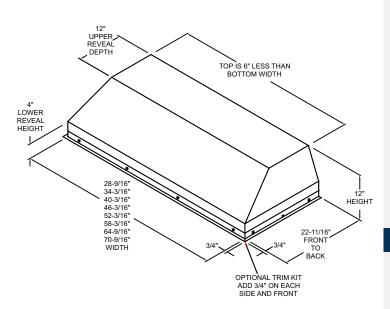

PRODUCT FEATURES

- Available in 28", 34", 40", 46", 52", 58", 64", and 70"
 width sizes
- Seamed construction
- 3 speed fan control
- · High heat sensor
- · Stainless steel baffle filters
- · Non-mirrored, finished edges
- · Accommodates top or rear discharge
- 28" and 34" models include a 300 or 600CFM in-hood blower
- · Remote and In-line fans available


BLOWER OPTIONS


In-Hood: 300, 600, and 1200CFM
In-Line: 300, 600, and 1200CFM
Remote: 1000 and 1400CFM



Refrigeration

36" BUILT-IN REFRIGERATOR



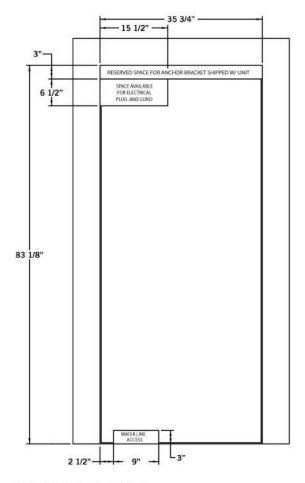

Revised BlueStar Refrigerator Dimesions Revision Date: November 1, 2016

PRODUCT FEATURES

- · Stunning stainless steel interiors
- · All glass and metal components
- · Heavy-duty construction
- · Dramatic, ramp-on LED lighting
- · Extra-large, fully extending drawers
- Fully extending tray that fits commercial size sheet pan
- · OLED touchscreen control
- · Dual compressors
- · Automatic ice maker
- Available in 36" bottom freezer that can be mounted built-in or integrated
- Choose from stainless steel plus 750+ colors and finishes. Available in 10 metal handle trim options plus left or right door swings

SPECIFICATIONS

Refrigerator Dimensions:

35.75"W x 26.187"D x 83.125"H


Electrical Requirements: 115V, 60Hz, 15 AMP circuit

(Unit must be on a Non-GFI, dedicated outlet)


Water Pressure: 35-120psi

DESIGN OPTIONS

• Door color, door swing, and trim options (see page 4).







PRODUCT FEATURES

- Accommodates most major dishwasher brands
- Heavy-duty stainless steel construction
- Available in 750+ colors and finishes

DESIGN OPTIONS

• Panel color, and trim options (see page 4).



For more information about BlueStar® products or to purchase, please contact: sales@bluestarcooking.com

328 June Avenue, Blandon, PA 19510 www.bluestarcooking.com



@bluestarcooking

Rev. February 2016

©2016. Prizer-Painter Stove Works, Inc. ALL RIGHTS RESERVED. Specifications subject to change without notice.

Product colors shown within this brochure are to be used for guidance only. Due to printing variations, actual colors may vary. For the most accurate color reference, please visit www.bluestarcooking.com to purchase a RAL paint sample.

BlueStar® and the associated trademarks depicted herein are registered trademarks of Prizer-Painter Stove Works, Inc., and its related companies.