
DATA SHEET

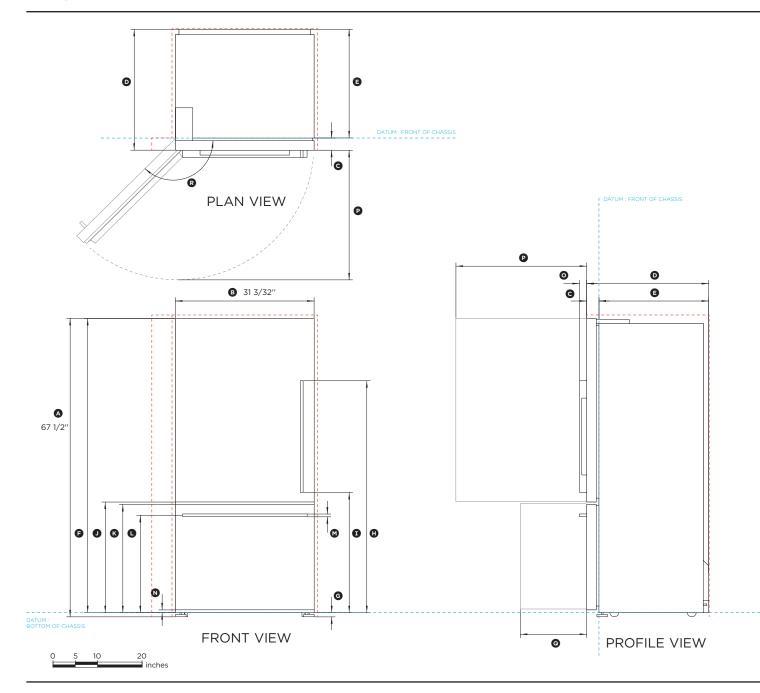

790MM ACTIVESMART™ FRIDGE

Model no:

RF170WDLX5

(refer page 2 for metric measurements)

Product Dimensions	in
Overall height* of fridge	67 1/2"
Overall width of fridge	31 3/32"
© Depth of fridge door and gasket (excludes handle)	2 3/4"
Depth of fridge door and chassis (excludes handle)	27 3/8"
E Depth of fridge chassis (does not include fridge door)	24 5/8"
E Height from bottom datum to top of fridge door	66 9/16"
Height of feet (adjustable)	15/16"
Height from bottom datum to top of top handle	52 3/8"
Height from bottom datum to bottom of top handle	27 1/8"
Height from bottom datum to bottom of top door	25 5/32"
Height from bottom datum to top of bottom door	24 21/32"
U Height from bottom datum to centerline of bottom handle	22 3/16"
M Thickness of handles	5/8"
Height from bottom datum to bottom of bottom door	13/16"
Depth of handle (measured from front of door)	1 5/8"
Depth of door (open at 90°) (measured from front of door)	29 5/16"
Depth of drawer (open) (measured from front of drawer) excluding handle	14 3/4"
® Rotation of door (open)	138°
* Includes mounted feet	
Minimum Clearances	in

68 5/16"

25/32"

5 5/16"

1 3/16"

INDICATES PRODUCT DATUM -----INDICATES CABINETRY CLEARANCES -----

DATE: 06.10.2015

Minimum height of cavity

Minimum side clearance installed flush with chassis


Rear clearance (including evaporator tray)

Side clearance (hinge side) - installed flush with door - full

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ± 2 mm (3/32"). Please read the installation manual for detailed information on installing the product. www.fisherpaykel.com



DATA SHEET

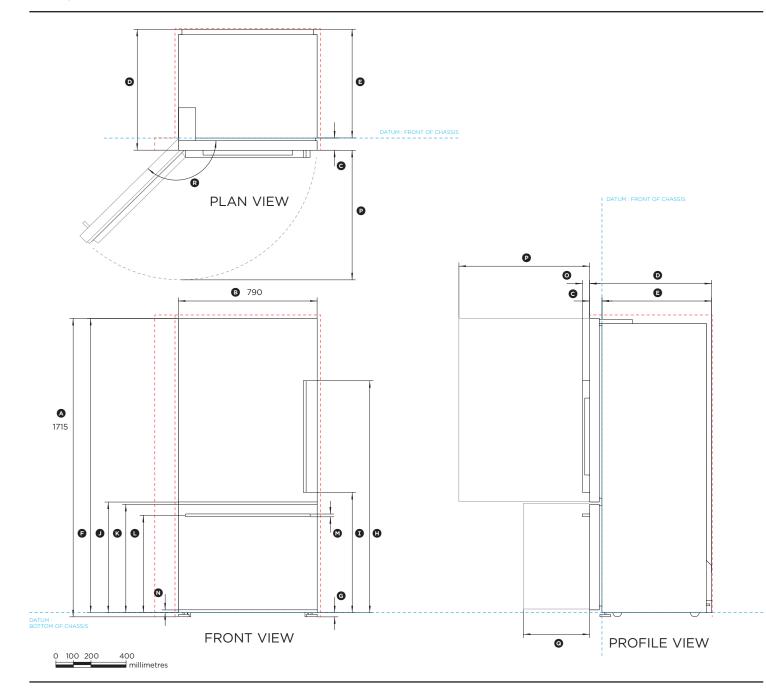

790MM ACTIVESMART™ FRIDGE

Model no:

RF170WDLX5

(refer page 1 for imperial measurements)

Product Dimensions	mn
Overall height* of fridge	1715
Overall width of fridge	790
© Depth of fridge door and gasket (excludes handle)	70
Depth of fridge door and chassis (excludes handle)	695
© Depth of fridge chassis (does not include fridge door)	625
E Height from bottom datum to top of fridge door	169
Height of feet (adjustable)	24
Height from bottom datum to top of top handle	133
① Height from bottom datum to bottom of top handle	689
① Height from bottom datum to bottom of top door	639
Height from bottom datum to top of bottom door	627
U Height from bottom datum to centreline of bottom handle	564
M Thickness of handles	16
N Height from bottom datum to bottom of bottom door	2
Depth of handle (measured from front of door)	4
Depth of door (open at 90°) (measured from front of door)	745
Depth of drawer (open) (measured from front of drawer) excluding handle	375
Rotation of door (open)	138'
* Includes mounted feet	
Minimum Clearances	mn
Minimum height of cavity	1735
Minimum side clearance installed flush with chassis	20
Side clearance (hinge side) - installed flush with door - full	135

INDICATES PRODUCT DATUM -----INDICATES CABINETRY CLEARANCES ------

Rear clearance (including evaporator tray)

DATE: 06.10.2015

rotation

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ± 2 mm (3/32"). Please read the installation manual for detailed information on installing the product. www.fisherpaykel.com

