



RF 411 701

Fully integrated
with integrated ice maker
Width 18"

RF 461 701

Fully integrated
with integrated ice maker
Width 24"

RF 471 701

Fully integrated
with integrated ice maker
Width 30"

Included accessory

1 ice scoop

Required installation accessories

RA 460 010

Heating kit if columns are not
attached (in separate niches) and less
than 6" apart

Installation accessories

RA 421 110

Stainless steel door
panel with handle for RF 411
Panel thickness 3/4".

RA 421 610

Stainless steel door
panel with handle for RF 461
Panel thickness 3/4".

RA 421 710

Stainless steel door
panel with handle for RF 471
Panel thickness 3/4".

RA 460 000

Installation kit for side-by-side
installation (for connecting any
two columns) Side-by-side kit comes
already attached to all RF freezers and
RW wine units

RA 460 020

Connecting element for vertically split
appliance fronts (for a flush front)

RA 461 110

Ventilation grill
Stainless steel for RF 411,
right-hinged

RA 461 111

Ventilation grill
Stainless steel for RF 411,
left-hinged

RA 461 610

Ventilation grill
Stainless steel for RF 461,
right-hinged

RA 461 611

Ventilation grill
Stainless steel for RF 461,
left-hinged

Freezer column

RF 411/RF 461/RF 471

- Stainless steel interior
- Net volume (18") 8.5 cu.ft.,
(24") 12.2 cu.ft., (30") 15.9 cu.ft.
- Integrated automatic ice maker
with fixed water connection
- Solid aluminum door bins
- ENERGY STAR® qualified
- Star-K certified

Operation

Electronic precision temperature
control with digital temperature
display.

Technical features

Dynamic cool air distribution with
Multi-Flow Air System.
Automatic defrosting with defrost
water evaporation.
Energy-saving vacation mode.
Open-door and malfunction
warning system.

Freezer compartment

No-frost technology with
fast freezing.
Temperature adjustable from 7°F
to -9°F (-14°C to -25°C).
4 solid metal shelves, three of
which are manually adjustable.
2 fully extendable drawers with
transparent front, one of which is
large, one is regular.
Bright interior lighting with LED
sidewall pillars.
4 height-adjustable door bins, one
of which is a gallon door bin.
1 door bin with transparent front flap.

Ice dispenser

Integrated, with fixed water
connection.
Ice maker can be switched
off independently.
Ice cube production approx. 3.9
lbs. (1.8 kg)/24 h.
Removable ice storage bin with
approx. 8.8 lbs. (4 kg) capacity.

Planning notes

Fiat hinge.
Door hinge left, reversible.
Door opening angle of 115°,
optional 90° door stop.
Max. door panel weight 37 lbs. (18"),
50 lbs. (24"), 64 lbs. (30").
Requires custom toe-kick.
Shut-off valve for water connection
must be planned next to the appliance
and always be accessible.
If the water pressure exceeds 116 psi,
connect pressure relief valve between
water tap and hose set.
Cold water connection required.
Electrical location 6" above ground in
lower left corner of unit.
Water pressure 29 to 116 psi.

For details, please refer to the
refrigeration planning guide on
pages 167-183.

Consumption data

Energy consumption 1.013/1.274/
1.416 kWh/24 h.; annually:
370/465/517 kWh.
Noise level 39 dB.

Rating

Total rating 0.367/0.444/0.565 kW.
Total Amps: 15 A.
120 V / 60 Hz
Connecting cable 78 3/4" with plug.
Supply hose 118" with 3/4" connection.

RA 425 110


Long stainless steel handle,
length 44 1/2", with three brackets,
drilling distance between each
mount 21 13/16"

RA 461 710

Ventilation grill
Stainless steel for RF 471,
right-hinged

RA 461 711

Ventilation grill
Stainless steel for RF 471,
left-hinged

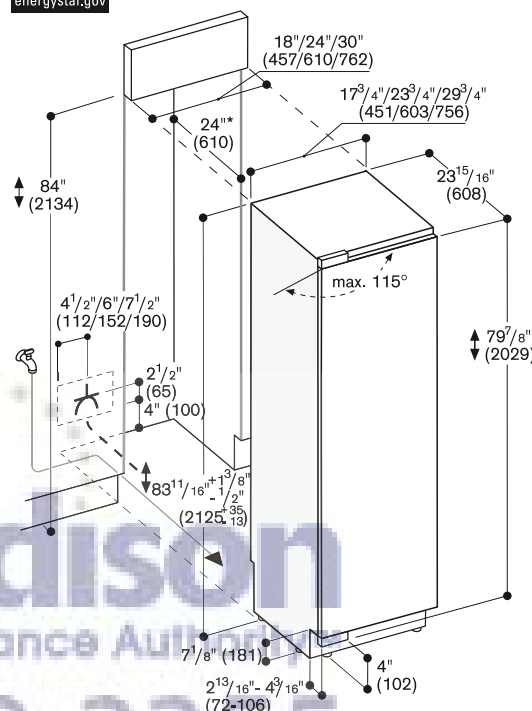

The door face dimensions are designed for a maximum gap of 1/8" (3 mm).

* For a flush-mounted appearance, the minimum cut-out depth must be
25". See more details on pages 170 and 177.

Numbers indicated
inside parenthesis () = mm