
RVM5160DHWW/BB/MPSA

Hotpoint[®] 1.6 Cu. Ft. Over-the-Range Microwave Oven


DIMENSIONS (IN INCHES)

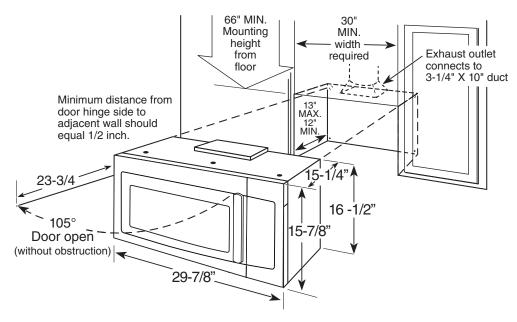

IMPORTANT INFORMATION: When installing the microwave oven over a range, allow minimum of 2" from bottom of microwave oven to top of range backguard to allow for removal of light covers.

INSTALLATION INFORMATION: This information is not intended to be used for installing unit described. Before installing, consult installation instructions packed with product/kit for current dimensional data.

OPTIONAL ACCESSORIES (AVAILABLE AT ADDITIONAL COST)



JX81J -RECIRCULATING CHARCOAL FILTER KIT To be used when the microwave oven cannot be vented to the outside.

VENTILATION OPTIONS: The microwave oven is designed for adaptation for the following three types of ventilation:

OUTSIDE EXHAUST (Vertical – Delivered from factory in vertical position)

OUTSIDE EXHAUST (Horizontal)

Recirculating (Non-vented ductless)



For answers to your Monogram, GE Café[™], GE Profile[™] or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center[®] Service, 800.626.2000.

Specification Revised 10/21

RVM5160DHWW/BB/MPSA

Hotpoint[®] 1.6 Cu. Ft. Over-the-Range Microwave Oven

FEATURES AND BENEFITS

Durable finish – The tough surface stands up to everyday wear and tear, resisting fingerprints better than stainless steel.* 1.6 cu. ft. capacity – 1000 Watts (IEC-705 test procedure) Convenience cooking controls – Operating made quick and easy Auto and time defrost – Defrosting times and power levels are programmed automatically or manually for optimal results Turntable – Rotates food throughout the cycle Two-speed, 200-CFM venting system – Quickly removes smoke and steam from cooktop Add 30 seconds – Add 30 seconds of microwave cooking time Model RVM5160DHBB – Black Model RVM5160DHBB – PRO-Steel Model RVM5160DHWW – White

*Applicable to PRO-Steel model.

