

- KEY FEATURES
- Dual TrueSteam® Technology

Built-In HandySteamer™

QuickRefresh™

Dynamic MovingHanger™

Plug & Go Design

Smart LCD Touch Display



MATERIAL & FINISH

Door Color	Mirror
Door Type	Glass
Styler Body Color	Textured Western Black

FEATURES

Drying Type	Dual Inverter HeatPump™ system
TrueSteam®	Yes (Dual TrueSteam®)
Dynamic MovingHanger™	Yes
Max RPM of Moving Hanger	350
Pants Crease Care	Yes
Space Dehumidification	Yes
Reversible Door	Yes
Aroma Kit	Yes
Versatile Shelf	Yes
End of Cycle Signal	Yes
Interior Light	Yes (3)
Empty Water Indicator	Yes
Fill Water Indicator	Yes
Built-In HandySteamer™	Yes
Auto Fresh System™	Yes

PROGRAMS

Dry 1 Time	Yes
Refresh	Light / Normal / Heavy / Wet
AI Styling	Yes
Sanitary	Find Dust / Normal / Heavy Duty / Kid's Item
Warm Blankets	Yes
Ready to Go	Yes
Gentle Dry - Dehumidify	Dehumidify, Time Dry, Rain / Snow
Sanitize	Bedding / Pillow, Doll / Suit / School Uniform
Special Care	Suits / Coats, Silk Care, School Uniform, Pants Crease
Styling	Wool / Knitwear, Cashmere, Fur / Leather, Padded Coat, Storage, Sportswear, Scarf, Old Clothes, Yoga Outfit, Silent, Jeans, Knitted Cardigan
Dry	Padded Coat, Low Temperature Dry, Wool / Knitwear Dry, Rainy Season Dry, Swimsuit, AI Dry, Yoga Outfit

CONTROL & DISPLAY

Display Type	Full Touch LCD + Button & LCD + LED Display
Figure Indicator	LCD
Delay Timer	3-19 Hours
LCD Size	2.4 Inches

ADDITIONAL OPTIONS

Night Care	Yes
Delay Start	Yes
Control Lock	Yes

SMART FEATURES (THINQ® TECHNOLOGY)

ThinQ (Wi-Fi)	Yes
Remote Start and Cycle Monitor	Yes
Download Cycle	Yes
Smart Diagnosis	Yes
Energy Monitoring	Yes
Voice Control (3rd Party Device)	No

POWER SOURCE

Electrical Requirement	120V, 60Hz, 12.5A
Plug	Included
Plug Type	3 Prong

DIMENSIONS/ CLEARANCES/ WEIGHT

Product Dimensions (WxHxD)	23 5/8" x 77 3/8" x 24 3/8"
Carton Dimensions (WxHxD)	28 1/4" x 80 3/4" x 27 5/8"
Product Depth with door open 90°	46 7/8"
Product Weight (lbs)	207.2
Shipping Weight (lbs)	277.1

OPTIONS & ACCESSORIES

Regular Hanger (Qty)	5
Pants Hanger (Qty)	No
Shelf (Qty)	1
Anti-Tip Kit (Qty)	No
Rear Leveling Feet	2
Carpet Install Spike	4

UPC CODE

SC5GQR8GA	195174148228
-----------	--------------


SC5GQR8GA

LG SIGNATURE Styler

QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.


PRODUCT DIMENSIONS

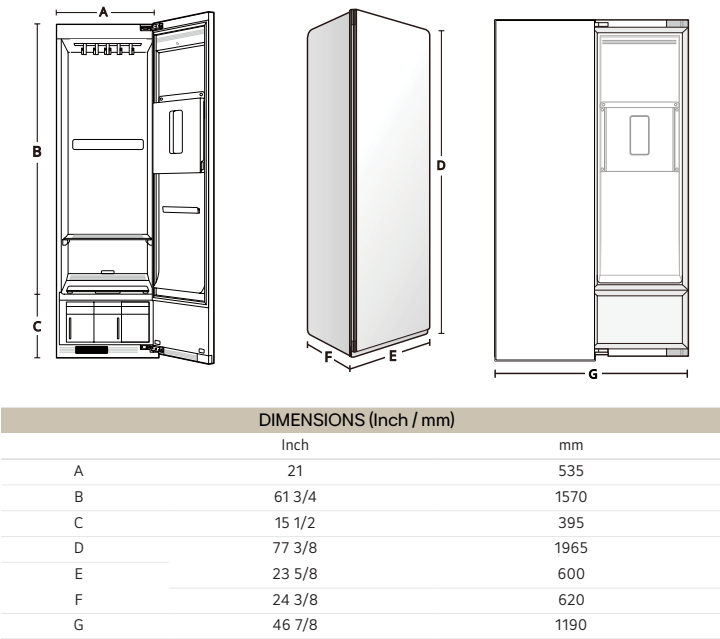


INSTALLATION

Before Installing - Installation Overview

Please read the following installation instructions first after purchasing this appliance or transporting it to another location.

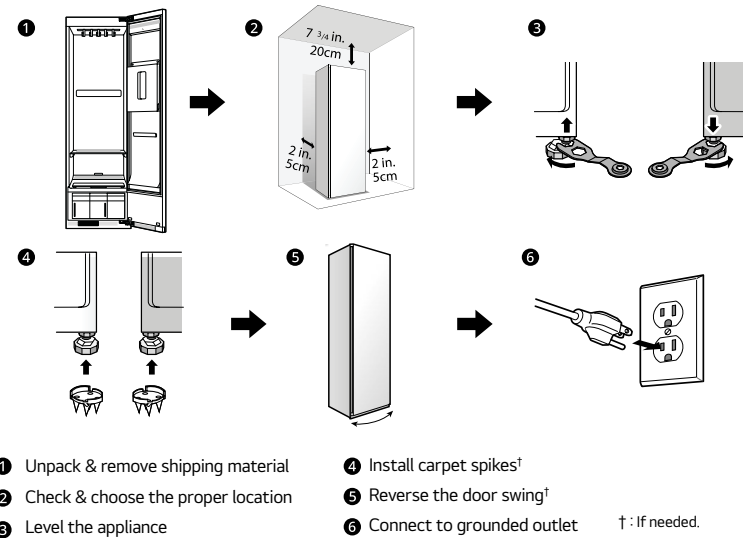




CLEARANCE



- 1 Allow at least 24 in. (61 cm) in front to open the door.
- 2 Allow at least 2 in. (5 cm) on both sides and between the back of the appliance and the wall.
- 3 Allow at least 7 3/4 in. (20 cm) between the top of the appliance and any overhanging shelves or cabinets.

Installation Spacing for Recessed Area or Closet Installation

There should be at least a little space around the appliance (or any other appliance) to avoid contact with walls, furniture, or other appliances during operation. Allow a minimum of 1 3/16 in. (3 cm) on all sides of the appliance to avoid increased noise or damage.

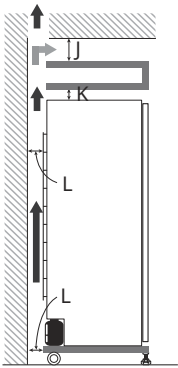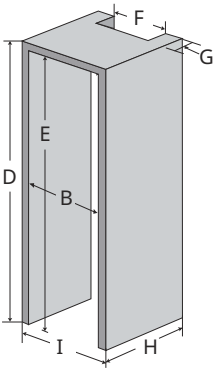


DIMENSIONS (Inch / mm)		
	Inch	mm
A	≥ 27 1/8	≥ 690
B	≥ 26 3/8	≥ 670
C	≥ 10	≥ 250
D	≥ 78 7/8	≥ 2004
E	≥ 78 3/8	≥ 1990
F	≥ 21 13/16	≥ 555
G	≥ 2	≥ 50
H	≥ 27 1/8	≥ 690
I	≥ 27 5/8	≥ 700
J	≥ 2	≥ 50
K	≥ 1	≥ 25
L	≥ 2	≥ 50

- For closet installation, with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Minimum vent opening for built-in installation is 31.5 sq. in. (200 cm2.)

Closet Ventilation Requirement

Closets with doors must have both an upper and lower vent to prevent heat and moisture build-up in the closet.

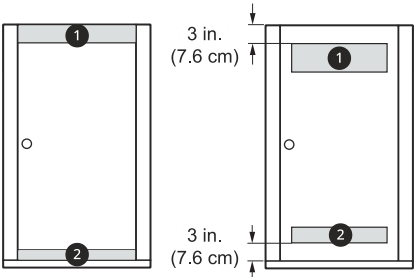

- 1 Upper vent opening with a minimum opening of 48 sq. in. (310 cm2) must be installed no lower than 6 ft. (185 cm) above the floor.
- 2 Lower vent opening with a minimum opening of 24 sq. in. (155 cm2) must be installed