

# Speed Queen® Multi-Housing

## Quantum® Commercial Top Load Washer

Rear Control

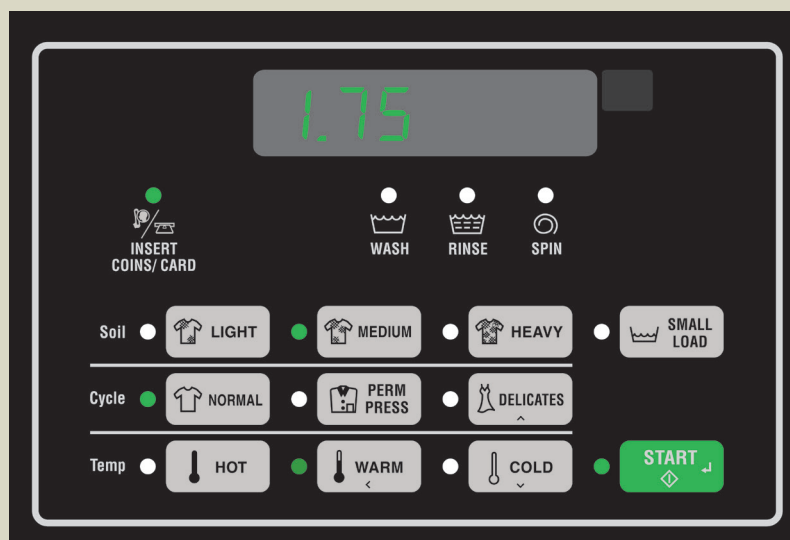


### BUILT FOR RELIABLE PERFORMANCE





- Touch pad control with sound annunciator
- 27 cycle selections
- U.S. DOE compliance for energy and water efficiencies
- Extract speed of 710 RPMs spins clothes out drier
- Secured coin vault meter case
- Commercial-grade stainless steel or porcelain enamel washtub
- Automatic balancing suspension system

### QUANTUM CONTROL

- Easy-to-read digital display
- Cycle programming flexibility
- Multi-level vend pricing
- Individual cycle modifier keys
- Card and coin transactions
- Wash Alert™ with Service Alert capable



# QUANTUM® COMMERCIAL TOP LOAD WASHER SPECIFICATIONS

MODELS and ACTIVATION	SWNNC2PP113TW02	SWNNC2SP113TW02	SWNNX2PP113TW02	SWNNX2SP113TW02
	 Coin "C"	 Coin "C"	 Prep Coin "X"	 Prep Coin "X"
<b>Appearance</b>				
Color	White	White	White	White
Control Panel Selection	Rear	Rear	Rear	Rear
Meter Case	High Capacity	High Capacity	High Capacity	High Capacity
<b>Water and Energy Info</b>				
Modified Energy Factor "MEF" ft³/kWh/cycle (Liters/kWh/cycle)	1.69 (47.89)	1.69 (47.89)	1.69 (47.89)	1.69 (47.89)
Water Factor "WF" gal/ft³ (Liters/Liter/cycle)	7.9 (1.06)	7.9 (1.06)	7.9 (1.06)	7.9 (1.06)
Water Consumption - gal (Liter)	24.6 (93.0)	24.6 (93.0)	24.6 (93.0)	24.6 (93.0)
<b>Technical Info</b>				
Basket Volume - 3.26 cu. ft. (92.3 liters)	Porcelain	Stainless	Porcelain	Stainless
Net Weight - lb (kg)	190 (86)	190 (86)	190 (86)	190 (86)
Shipping Weight - lb (kg)	210 (95)	210 (95)	210 (95)	210 (95)
Electrical Requirements	120/60/1 15 amp	120/60/1 15 amp	120/60/1 15 amp	120/60/1 15 amp
Overall Dimensions WxDxH - in (mm): 25 5/8 (651) x 28 (711) x 43 7/8 (111.44)				
Cabinet Height - in (mm)	36 (914)	36 (914)	36 (914)	36 (914)
Temperature - Hot, Warm, Cold	Yes	Yes	Yes	Yes
Cycle - Light, Medium, Small Load, Normal, Perm Press, Delicates				
Motor	1/2 HP	1/2 HP	1/2 HP	1/2 HP
Water Pressure PSI (Bar)	20-120 (1.4-8.3)	20-120 (1.4-8.3)	20-120 (1.4-8.3)	20-120 (1.4-8.3)
Spin Speed - RPM - high 710, low 474	2 Speed	2 Speed	2 Speed	2 Speed
<b>Performance/Features</b>				
Secured Automated Audits	Yes	Yes	Yes	Yes
Soil Level Modifiers	Yes	Yes	Yes	Yes
Rear Self-Leveling Legs	Yes	Yes	Yes	Yes
Agency Approval	cULus	cULus	cULus	cULus

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO9001:2008.

