

# SPEED QUEEN MULTI-HOUSING

QUANTUM® GOLD COIN DROP INSTALLED, PREP FOR CARD

## COMMERCIAL STACK DRYER

WINDOW DOOR - OVERALL HEIGHT OF 76.5" (1943 mm)

### Built for Reliable Performance

Speed Queen's stack dryer offers the same great features as the single load dryer. Two commercial dryers in the space of one, both operating independently, including independent controls for optimum usage. Defined by its simplicity and its performance, Speed Queen provides everything you need to get the job done - and nothing you don't. Speed Queen's stack dryer combines heavy-duty construction with reliable operation proven to stand the test of time. They're designed with less moving parts for one reason: so you'll face fewer maintenance problems and less wear and tear down the road. Speed Queen's dryers provide the perfect balance of heat, airflow and tumble action for optimal performance and efficiency. Bottom dryer is ADA compliant.

- Integrated meter case
- Industry's largest door opening 2.06 sq. ft. (1914 cm<sup>2</sup>)
- Quiet, efficient blower system
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- 100% serviceable from the front
- Space-saving narrow cabinet 26.875" (683 mm)  
Height 76.5" (1943 mm)
- Upfront lint filter easy to clean and secured
- Durable galvanized steel cylinder
- Large capacity coin box standard



Cutting edge Quantum control system from Speed Queen gives you the freedom to manage laundry your way and the power to achieve unmatched levels of revenue. This revolutionary technology provides users with more cycle choices than ever, offers unprecedented options to help lower operating costs and incorporates tools and options to increase revenue.




## SPECIFICATIONS

# COMMERCIAL STACK DRYER

WINDOW DOOR - OVERALL HEIGHT OF 76.5" (1943 mm)

|                                                           |                                                     |
|-----------------------------------------------------------|-----------------------------------------------------|
| MODEL - see below for all models and activation available |                                                     |
| CONTROL OPTION                                            | Quantum Gold                                        |
| COLOR                                                     | White                                               |
| CAPACITY - lb (kg)                                        | 18 (8.2) ea                                         |
| OVERALL WIDTH - in (mm)                                   | 26.875 (683)                                        |
| OVERALL DEPTH - in (mm)                                   | 28 (711)                                            |
| OVERALL HEIGHT - in (mm)                                  | 76.5 (1943)                                         |
| CYLINDER VOLUME - cu. ft. (liters)                        | 7.0 (198) ea                                        |
| MOTOR (CAPACITOR START AND THERMAL PROTECTED)             | .33 HP                                              |
| TYPE OF GAS (GAS MODELS ONLY)                             | Factory equipped natural/mixed gas                  |
| AIR OUTLET DIAMETER - in (mm)                             | 4 (102)                                             |
| EXHAUST AIRFLOW - cfm (liters/sec)                        | 220 (105)                                           |
| AVAILABLE CYCLES                                          | High, Medium, Low, Delicates, No Heat               |
| ELECTRICAL REQUIREMENTS                                   | Electric 120/240/60/1-30 amp<br>120/208/60/1-30 amp |
|                                                           | Gas 120/60/1-15 amp                                 |
| HEATING ELEMENT                                           | Electric 5350W, 240V<br>4750W, 208V                 |
|                                                           | Gas 25,000 Btu                                      |
| SHIPPING DIMENSIONS APPROX. - in (mm)                     | Width 33 (838)                                      |
|                                                           | Depth 30 (762)                                      |
|                                                           | Height 80 (2032)                                    |
| NET WEIGHT - lb (kg)                                      | Electric 270 (122.5)                                |
|                                                           | Gas 270 (122.5)                                     |
| SHIPPING WEIGHT lb (kg)                                   | Electric 280 (127)                                  |
|                                                           | Gas 280 (127)                                       |
| AGENCY APPROVALS                                          | Electric cULus                                      |
|                                                           | Gas cCSAus                                          |

| MODELS          | VOLTAGE/FREQ/PH |          | ACTIVATION          |
|-----------------|-----------------|----------|---------------------|
| SSENCFGW173TW01 | 120/240/60/1    | Electric | Coin Drop Installed |
| SSENCFGW153TW01 | 120/208/60/1    |          |                     |
| SSGNCFGW113TW01 | 120/60/1        | Gas      |                     |
| SSENYFGW173TW01 | 120/240/60/1    | Electric | Prep for Card       |
| SSGNYFGW113TW01 | 120/240/60/1    | Gas      |                     |

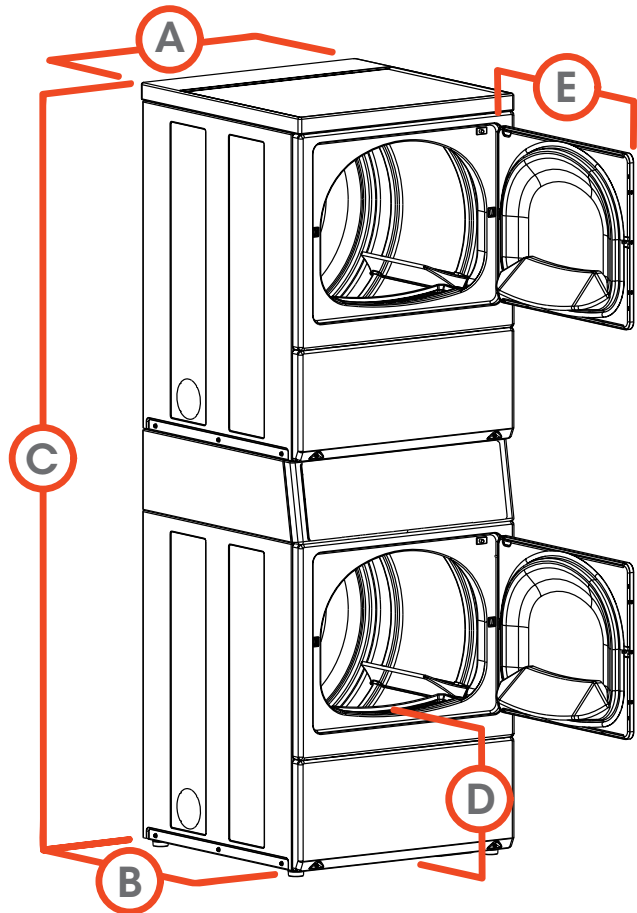

|    |                                 |              |
|----|---------------------------------|--------------|
| A. | OVERALL WIDTH - in (mm)         | 26.875 (683) |
| B. | OVERALL DEPTH - in (mm)         | 28 (711)     |
| C. | OVERALL HEIGHT - in (mm)        | 76.5 (1943)  |
| D. | FLOOR TO DOOR OPENING - in (mm) | 15.44 (392)  |
| E. | DOOR SWING - in (mm)            | 23.5 (597)   |

NOTE: Each stack dryer pocket requires its own separate power cord (not supplied).

■ Electric dryers come equipped for 240/60/1 operation. They can be field converted to operate on 208/60/1 with optional 61928 conversion kit. Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.