SCOTSMAN UNDERCOUNTER COMPACT CUBER WITH STORAGE





CRYSTAL CLEAR GOURMET CUBE SIZE: 1"W x 1 ¹/8"H DIAMETER: 1 ¹/4"

C S E 6 0

24 HOUR VOLUME PRODUCTION

| | | Certified & rated in accordance with ARI stan- dard 810-95 | Air-Cooled | | | |
|--|-------|---|--------------------|----------------------------|--|--|
| | | | 70°/50° lbs/kg. | ARI 90º/70º lbs./kg. | | |
| | cse60 | | 69/31 | 55/25 | | |

DEPENDABLE PERFORMANCE IN ANY CONDITION:

- Produces up to 55 lbs. of crystal-clear, gourmet ice in 24 hours
- Stores up to 28 lbs.
- Energy Saving System that optimizes cycle efficiency and ice quality, while reducing energy consumption and cutting operating costs.
- Durable stainless steel construction.
- Power cord for quick installation.

WARRANTY See your dealer for complete warranty details.

- 3 years parts and labor on all components.
- 5 years parts on the compressor and condenser.



BUILT-IN CONVENIENCE Under counter bar installation puts the ice where it is needed. Legs allow for cleaning below and aisle ventilation.




Scotsman is proud to announce that we are ISO-9001:2000 Certified





Ice Machine Specifications

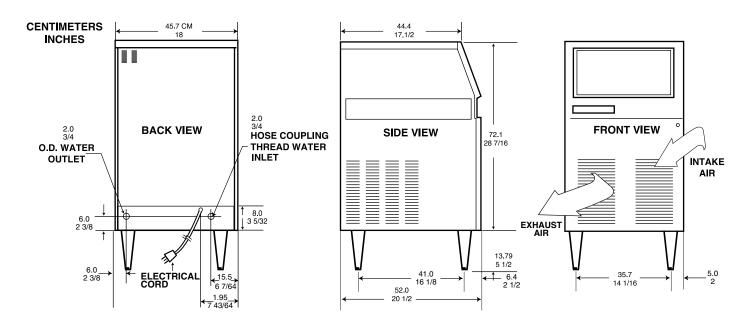

Installation Note: Allow 6" minimum space at back for utility connections

| All models: | Il models: Dimensions W x D x H: without legs (Add 6" height for legs): | | | Unit: 18" x 20 ¹ / ₂ " x 28 ⁷ / ₁₆ " | | Shipping Carton: 24" x 21" x 31" | | | | | |
|-----------------|---|------------------------------|---------------------------------------|--|-------------|----------------------------------|-----------------------------|--------------------------------|--|--|---|
| Model Number | Condenser Unit | Bin* Capacity lbs./kg. | Basic Electrical Volts/Hz/Phase | Max. Fuse Size or HACR Circuit Breaker | Comp. HP | Circuit Wires | Min. Circuit Ampacity | Shipping Weight Ibs./kg. | Power Consumption KWH/100 lbs. 90°F/70° F | Water Gallons, Potable 90°F/70° F | |
| CSE60A-1A | Air | 28/12 | 115/60/1 | 15 | 1/4 | 2 | CORD | 105/48 | 17.3 | 49.0 | - |

*Bin capacity rated in accordance with ARI Standard 820-95.

All units with stainless steel finish. Refrigerant: R-134a

LEGS SUPPLIED:

Four plastic legs screw into mounting plates on cabinet base. Provides 6" minimum height.

Scotsman's ice machines are not designed for outdoor installations. Scotsman remote condensers are designed for outdoor installations.

Machine requires voltage indicated on rating name plate. Failures caused by improper voltage are not considered factory defects. Extended periods of operation at temperatures exceeding limitations constitutes misuse under the terms of Scotsman Manufacturer's Limited Warranty, resulting in a loss of warranty coverage. Specifications and design are subject to change without notice.

Consult Your Local SCOTSMAN Representative At:

IMPORTANT OPERATING REQUIREMENTS:

| | Minimum | Maximum |
|--------------------|--------------|----------------|
| Air Temperatures | 50°F (10°C) | 100°F (37.7°C) |
| Water Temperatures | 40°F (4.4°C) | 100°F (37.7°C) |
| Water Pressures | 20 PSIG | 120 PSIG |
| Electrical Voltage | -5% | +10% |
| | | |

YOU'LL VALUE THE DIFFERENCE".

775 Corporate Woods Parkway • Vernon Hills, IL 60061 • 1-800-SCOTSMAN • Fax: (847) 913-9844 Visit our website at: www.scotsman-ice.com • E-mail: customer.service@scotsman-ice.com



SU-E60 10M 9-C