

T784

FAMILY-SIZE DRYER
LINE SERIES LOGIC



T784W LINE SERIES LOGIC

Type: Family-size vented dryer

Colors: White (W) with reversible side-swing exterior door

PROGRAMS

Auto heavy, Auto normal, Auto delicate, Auto iron dry, Jeans, Synthetic, Auto terry, Auto down, Timed dry, Air fluff

OPTIONS

Anti-Crease, Low temperature, Delay start (24 hrs) and TimeSaver™ cool down

CAPACITY

UltraCare™ – family-size capacity

ENVIRONMENTAL

Energy efficient, Majority of manufacturing components labeled for recycling and Certified ISO14001 for environmental quality

TECHNOLOGY

Line Series™ Logic control with LCD display, SensiDry™ sensor, Butterfly™ drying system, Double lint filter and Cleanable fan

CONSTRUCTION

Stainless Steel drum, Ball bearing suspension, Heavy duty life-tested motor, 66 dB(A) noise level, Galvanized steel rear panel

SIMPLICITY/COMFORT

Drum light, Program memory, Display with program information and remaining time indication, Vents to 60 & 3-way venting, Stacking kit included, Reversible door and 12 languages

SAFETY

KidSafe™ – child-safe start option

WARRANTY

Industry leading 2 Plus 1 Warranty – up to three years parts and labor protection

AjMadison
Your Appliance Authority
800-570-3355

T784

FAMILY-SIZE DRYER – LINE SERIES™ LOGIC

COLOR White with reversible side-swing exterior door **SKU** T784W



PROGRAMS

Auto heavy, Auto normal, Auto delicate, Auto iron dry, Timed dry, Air fluff, Auto terry, Auto down, Jeans, Synthetic

OPTIONS

Anti-Crease, Low temperature, Delay start – 24 hr, TimeSaver™ cool down

CAPACITY

UltraCare™ – family-size capacity

ENVIRONMENTAL

Majority of manufacturing components labeled for recycling, ISO14001 Environmental Quality certified

TECHNOLOGY

Line Series™ Logic control with LCD display, SensiDry™ sensor, Butterfly™ drying system, Double lint filter, Cleanable fan

CONSTRUCTION

Stainless Steel drum, Ball bearing suspension, Heavy duty life-tested motor, ISO9001 Quality Standard certified, 66 dB(A) noise level, Galvanized steel base, Rear panel

SIMPLICITY/COMFORT

Line Series™ Logic control with LCD display, Drum light, Program memory, Display with program information and remaining time indication, Vents to 60' & 3-way venting, Stacking kit included, Reversible door, 12 languages

SAFETY

KidSafe™

WARRANTY

Exclusive Industry leading 2 plus 1 Warranty provides three years parts & labor coverage, Toll free customer support

T754 / T754C

FAMILY-SIZE DRYER – LINE SERIES™ CLASSIC

VENTED

VENTELESS (CONDENSER)

| | White | Titanium | White | Titanium |
|-------------|-------|----------|--------|----------|
| SKUs | T754W | T754T | T754CW | T754CT |



PROGRAMS

Auto heavy, Auto normal, Auto delicate, Auto iron dry, Timed dry, Air fluff

OPTIONS

Anti-Crease, Low temperature, Delay Start – 24 hr, TimeSaver™ cool down

CAPACITY

UltraCare™ – family-size capacity

ENVIRONMENTAL

Majority of manufacturing components labeled for recycling, ISO14001 Environmental Quality certified

TECHNOLOGY

Line Series™ Classic control with LCD display, SensiDry™ sensor, Butterfly™ drying system, Double lint filter, Cleanable fan

CONSTRUCTION

Stainless Steel drum, Ball bearing suspension, Heavy duty life-tested motor, ISO9001 Quality Standard certified, Galvanized steel base, Rear panel

SIMPLICITY/COMFORT

Line Series™ Classic control with LCD display, Program memory, Stacking kit included, Reversible door, Easy clean condenser (T754C), Vents up to 60' & 3-way venting (T794), 66 dB(A) noise level

WARRANTY

Exclusive Industry leading 2 plus 1 Warranty provides three years parts & labor coverage, Toll free customer support

PLANNING & DESIGN: FAMILY-SIZE DRYER – LINE SERIES™

T794FI, T784, T754 Vented Dryers


Unit Dimensions

| | US | METRIC | |
|------------------|------------------------|--------------------------------------|----------------------------|
| HEIGHT: | 33 ½"– 34 ½" | 851 – 876 mm | |
| WIDTH: | 23 ½" | 597 mm | |
| DEPTH: | T753 T793FI T783 | 23 7/8" * 23 1/8" ** 23 7/8" * | 606 mm 587 mm 606 mm |
| DEPTH WITH T753 | 46 1/8" | 1172 mm | |
| DOOR OPEN:T793FI | 47 7/8" | 1216 mm | |
| T783 | 46 1/8" | 1172 mm | |
| WEIGHT: | 86 lbs | 39 kg | |

Technical Data

| | |
|----------------|------------------------------|
| Supply voltage | Single-phase 220 V, 60 Hz |
| Max Wattage | 3000 W |

NOTE: When on a separate outlet, use 220 V, 20 Amp single-phase circuit. When an ASKO washer is connected, use 220 V, 30 Amp single-phase circuit.

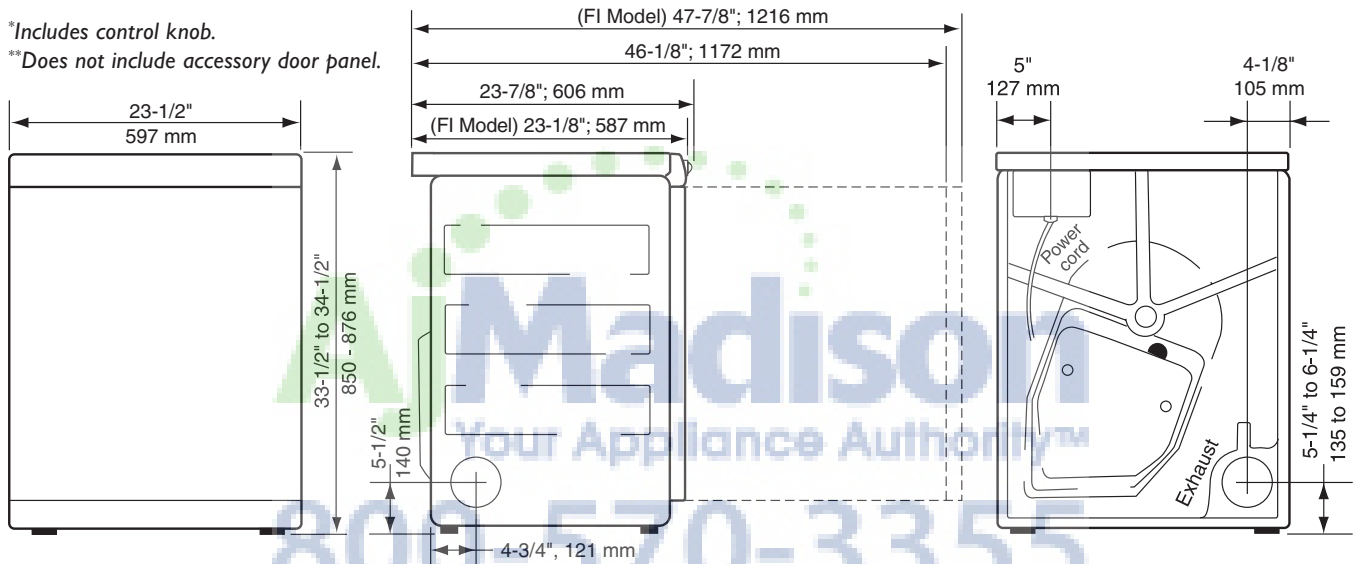

The door hinges on ASKO dryers are shipped left-hinged, but they are reversible. See the ASKO Dryer Use and Care Guide for more information.

When placing the dryer next to a wall or cabinet, be sure to leave ¼" (6 mm) of space between the dryer and the wall or cabinet.

See page 35-36 for stacked washer/dryer dimensions.

See pages 38-40 for cutout dimensions for closet and under-cabinet installations.

NOTE: Power cord not supplied with unit.

Specifications are subject to change without notice. See installation instructions for additional details.

Venting Requirements


WARNING! To reduce the risk of fire, vented dryers must be exhausted OUTDOORS or the equivalent.

Never cover the end of the dryer stub or vent hose with anything to catch lint, except for a UL-approved vent basket.

The exhaust hose should be run with as few bends as possible to the point of discharge. Maximum duct length of 60' (1829 cm) is allowed. Make any bends as gentle as possible. A maximum of four 90° bends may be fitted in the hose, otherwise the performance of the dryer will be impeded. Subtract 4' (122 cm) of duct for each 90° elbow. If more than 20' (210 cm) of duct is needed, we recommend increasing the diameter of the duct to 6" or 8" (152 mm or 203 mm).

If the exhaust hose is taken to a wall outlet, a ventilation grill should be fitted to prevent reverse flow of cold air. Fit the ventilation grill to the outside or inside of the wall.

This appliance should not be exhausted into a chimney, a wall, a ceiling, or a concealed space of a building. Only a metal ventilation grill should be used.

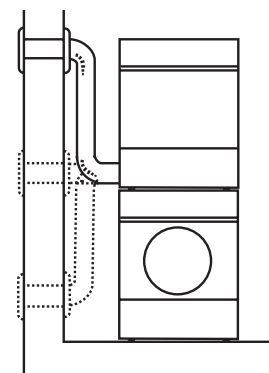

Installation Examples

Subtract 4 feet (122 cm) for every 90° elbow.

ASKO All ASKO Dryers NEW! Dryer T784

Image not available!


AjMadison
Your Appliance Authority™
KidSafe™

T784

Sensor-controlled vented dryer
Color: White with reversable side-swing exterior door

PROGRAMS

Auto heavy, Auto normal, Auto delicate, Auto iron dry, Jeans, Synthetic, Terry, Down, Timed dry, Air fluff
OPTIONS
Anti-crease, Low temperature, Delayed start 1-24 hrs, Time-Saver™ cool down, End of program signal

TECHNOLOGY

Line Series™ Logic Control with LCD display, SensiDry™ sensor, Butterfly™ drying system, Double lint filter and Cleanable fan
CONSTRUCTION
Stainless Steel drum, Ball bearing suspension, Galvanized rear panel

COMFORT

Remaining time indication, program memory, read out display, languages, noise level: 66 dB(A)

SAFETY

Technical specifications - NEW! Dryer T784

OPTIONS:

| | |
|-------------------------------|-----|
| Timed Dry Program (min) | Yes |
| Adjustable drying temperature | Yes |

CONSUMPTION:

| | |
|----------------|-----|
| Voltage (V) | 220 |
| Current (A) | 20 |
| Frequency (Hz) | 60 |

COMFORT:

| | |
|----------------|-----|
| Interior light | Yes |
|----------------|-----|

OTHERS:

| | |
|------------|--------|
| Dryer type | Vented |
|------------|--------|

OTHER FEATURES:

| | |
|------------------------------|-----------------|
| Adjustable feet | Yes |
| Anti-crease function | Yes |
| Auto Down | Yes |
| Auto iron dry | Yes |
| Auto Jeans | Yes |
| Auto normal dry | Yes |
| Auto Synthetic | Yes |
| Auto Terry | Yes |
| Automatic programs | Yes |
| Butterfly Drying™ | Yes |
| Double Lint Filter | Yes |
| Drum material | Stainless Steel |
| Main color of product | White |
| Max. Vent hose length (feet) | 60 |
| Product family | Line Series™ |
| Program Memory | Yes |
| Remaining Time Indication | Yes |
| Type of safety | Kid Safe™ |

