

Viking Installation Guide



Viking Range Corporation

111 Front Street

Greenwood, Mississippi 38930 USA

(662) 455-1200

For product information,

call 1-888-VIKING1 (845-4641)

or visit the Viking Web site at

vikingrange.com

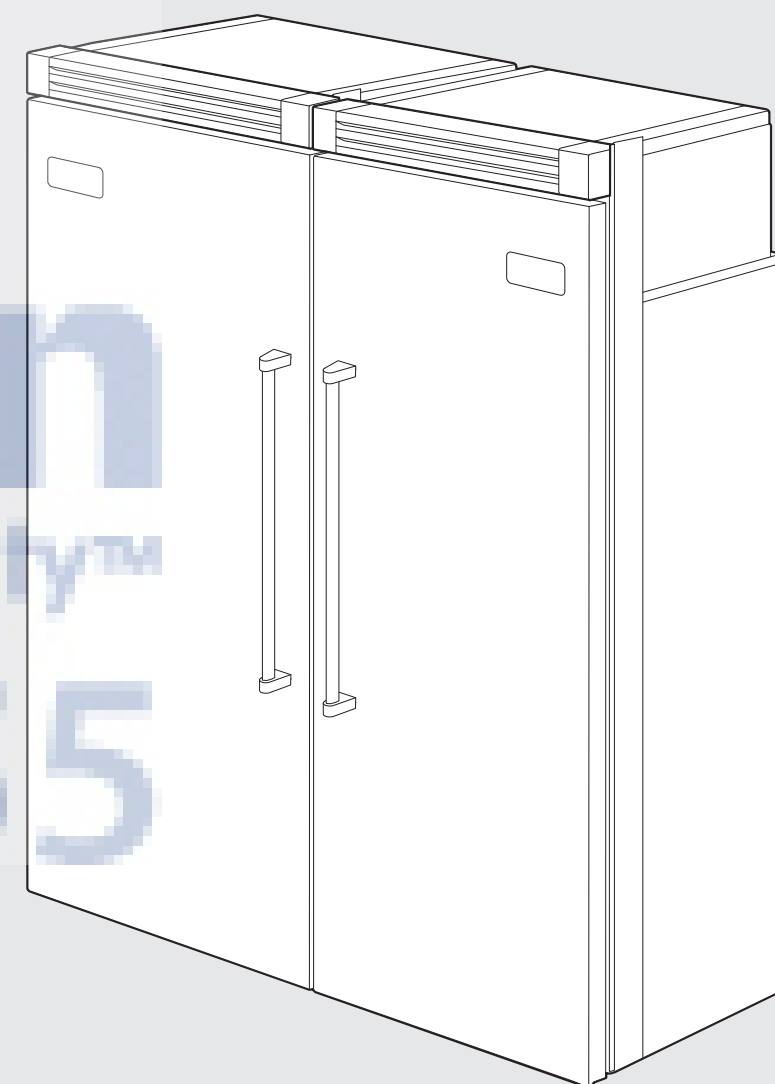


Table of Contents

Warnings & Important Information	3
General Information	6
Unpacking & Moving	8
Grille Removal	9
Professional & Professional Integrated	
Dimensions (Dual 30" Professional)	10
Dimensions (Dual 30" & 36" Professional)	11
Dimensions (Dual 36" Professional)	12
Specifications (Dual Professional)	13
Dimensions (Dual 30" Professional Integrated)	14
Dimensions (Dual 30" & 36" Professional Integrated)	15
Dimensions (Dual 36" Professional Integrated)	16
Specifications (Dual Professional Integrated)	17
Cutout Dimensions (Dual 30" Professional & Professional Integrated)	18
Anti-Tip Dimensions (Dual 30" Professional & Professional Integrated)	19
Cutout Dimensions (Dual 30" & 36" Professional & Professional Integrated)	20
Anti-Tip Dimensions (Dual 30" & 36" Professional & Professional Integrated)	21
Cutout Dimensions (Dual 30" Professional & Professional Integrated)	22
Anti-Tip Dimensions (Dual 36" Professional & Professional Integrated)	23

IMPORTANT—Please Read and Follow!

A GFI shall be used if required by NFPA-70 (National Electric Code), federal/state/local laws, or local ordinances.

- The required use of a GFI is normally related to the location of a receptacle with respect to any significant sources of water or moisture.
- Viking Range Corporation will NOT warranty any problems resulting from GFI outlets which are not installed properly or do not meet the requirements below.


If the use of a GFI is required, it should be:

- Of the receptacle type (breaker type or portable type NOT recommended)
- Used with permanent wiring only (temporary or portable wiring NOT recommended)
- On a dedicated circuit (no other receptacles, switches or loads in the circuit)
- Connected to a standard breaker of appropriate size (GFI breaker of the same size NOT recommended)
- Rated for Class A (5 mA +/- 1 mA trip current) as per UL 943 standard)
- In good condition and free from any loose-fitting gaskets (if applicable in outdoor situations)
- Protected from moisture (water, steam, high humidity) as much as reasonably possible

IMPORTANT—Please Read and Follow!

It is your responsibility to:

Dimensions

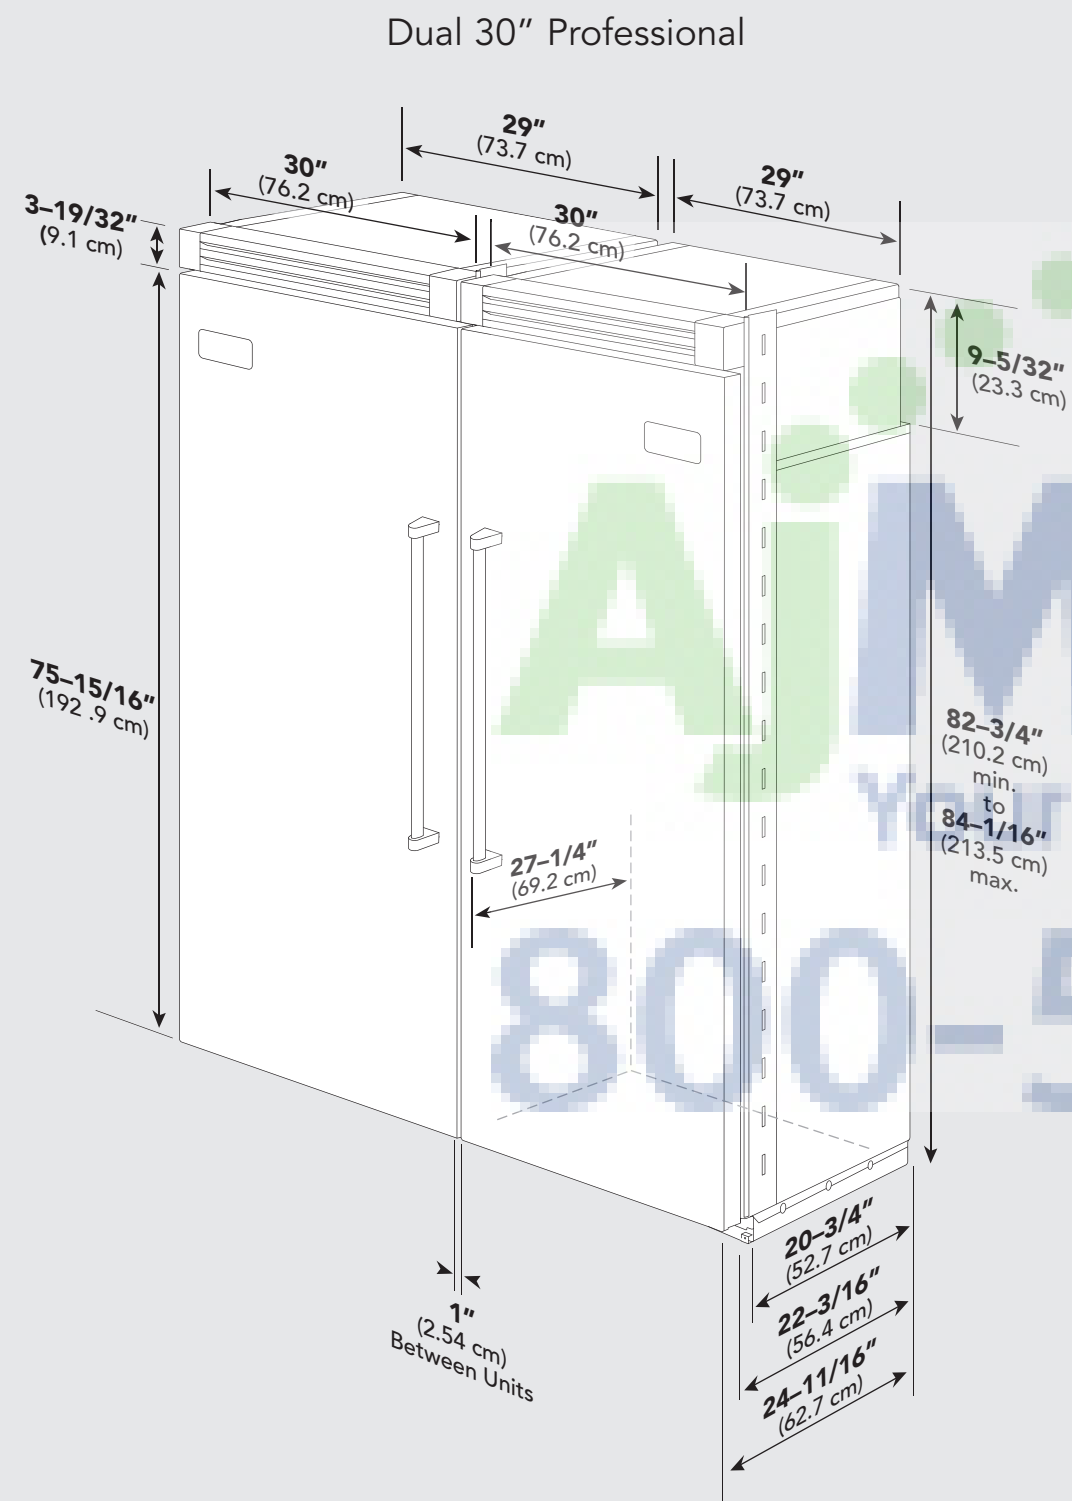

Dimensions

