

Viking Built-In 301 Series Dishwasher

Multi-Level Power Wash

- Multi-level washing with two stainless steel wash arms
- Largest and most powerful in industry
- Flexible-Fluid™ Coupling is block-proof and provides a direct water feed – **Exclusive**
- DishGuard™ Protector prevents blockage from lower rack load and protects dishes
- Sliding detergent/rinse agent dispenser

Five-Stage Filtration and Waste Removal System – Exclusive

- Prevents redeposit of food particles to deliver spot-free dishes
- Removable coarse strainer
- Triple-Clean™ filtration
- Ultra-hard food waste disposer

Sure-Temp™ Water Heating

- Automatically heats water to appropriate/selected temperature, assuring excellent washing results
- 1200-watt HydroFlo™ water heater

Condensate Quick Dry

- Moisture condenses on the cooler stainless steel tank and door and drains to sump area
- Quick and efficient drying

Quiet Clean™ Performance Packages


- Engineered top to bottom for the quietest operation possible
- Separate motor/pump assemblies for washing and draining
- Sound-absorbing/heat-retaining insulation

“Load-As-You-Like” Sturdi-Bilt™ Racks

- Accommodates 15 international place settings
- Fully useable and extendable nylon coated racks
- One-piece silverware/cutlery basket with lids
- Lower Rack
- Four rows of one-piece three-position fold-down tines
- Roller Bearing™ Upper Rack
- Three rows of multi-position Hold-Tight™ dividers – **Exclusive**
- 1 one-piece stemware cradle/cup shelf

Cycles/Options

- Cycles – Pots/Pans, Normal Wash, Light/China, Rinse/Hold
- Options – Hi-Temp Wash, Sanitized 155°F Rinse, Delay start up to 4 hours
- Energy Star Qualified
- CEE Tier I Super Efficient
- NSF Certified

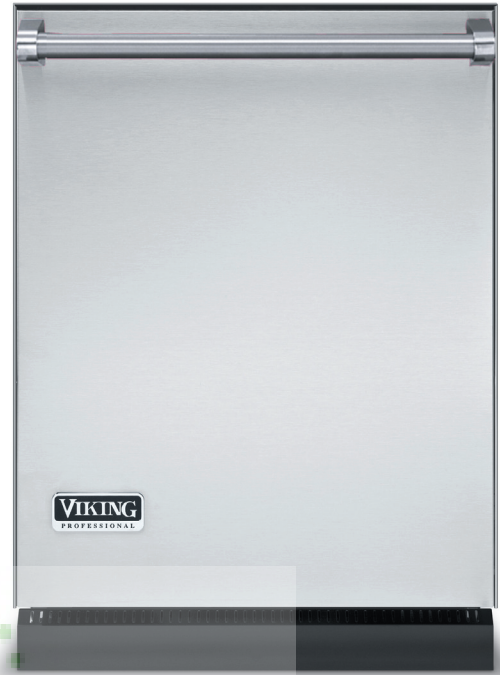

VDB301

Shown with new custom handle and endcap

Models

- VDB301 – Professional door

Finish Options

- VDB301 available in Stainless Steel, Black, and White

Warranty Highlights

- Three-year full – complete dishwasher – Industry Exclusive
- Lifetime limited – tank and inner door
- Five-year limited – electronic controls, racks, motor/pump assemblies, and water distribution system
- Ninety-day limited – cosmetic parts such as glass, painted items, and decorative items



Professional Performance for the Home™

Basic Specifications

Description	DISHWASHER
	VDB301
Overall Width	23 7/8" (60.6 cm)
Overall Height from Floor	33 7/8" (86.0 cm) min. to 35" (89.0 cm) max.
Overall Depth from Rear with Door Panel Installed	23 5/8" (60.0 cm) With door open – 49" (124.5 cm).
Cutout Width	24" (61.0 cm)
Cutout Height	34" (86.4 cm) min. to 35" (89.0 cm) min.
Cutout Depth	24" (61.0 cm)
Electrical Requirements	15.0 amps, 120 VAC/60 Hz; 3'9" (1.1 m) electrical cord with 90 degree 3-prong plug supplied with unit
Water Heating Element Rating	1200 watts
Inlet Water Temperature	120°F (49°C) recommended; 5' braided stainless steel hose with 3/8" OD compression fitting supplied with unit
Drain Hose	7' (2.1 m) long 1/2" (1.3 cm) ID "crimp-proof" flexible drain hose with clamp attached to dishwasher; connections provided for 5/8" (1.6 cm), 3/4" (1.9 cm), or 1" (2.5 cm), cut as required
Drain Hose High Loop Required	Height from floor – 20" (51.0 cm) min.
Approximate Shipping Weight	152 lbs. (68.5 kg)

Please do not prepare installation from brochure data only. See installation instructions for important clearance/installation information.



Viking Range Corporation
111 Front Street
Greenwood, Mississippi 38930 USA
(662) 455-1200
For product information, call 1-888-VIKING1 (845-4641), or visit the Viking Web site at vikingrange.com

© 2012, Viking Range Corporation.

To receive the most current specification sheets, visit Dimension Express at www.dexpress.com or call from your fax machine at (925)284-3558. Enter code #8051 for Viking Products. This will send you information on how to use the system and the corresponding model code numbers. Dimension Express customer support can be reached by email at: support@dexpress.com.