



## 7 SERIES GAS RANGETOPS

Redefining Professional Performance for Your Home.



The Viking Professional 7 Series Rangetops boast unrivaled heat distribution with Viking Elevation Burners™ that reach up to 23,000 BTUs while still achieving a low, even simmer thanks to the VariSimmer™ Setting. Adapted from the Viking Commercial product line, these rangetops allow for kitchen design flexibility without sacrificing power and performance.

Shown with optional accessory ViChrome™ Griddle



36" W. Gas Rangetop



36" W. Gas Rangetop  
with griddle



48" W. Gas Rangetop



48" W. Gas Rangetop  
with griddle

Shown with optional accessory 10"H. backguard



## 7 SERIES GAS RANGETOPS FEATURES



### Commercial-Type Surface Power

- **EXCLUSIVE** Viking Elevation Burners™ with brass flame ports boast 23,000 BTUs across the front of all width configurations, with multiple 15,000 BTUs and one 8,000 BTU burner across the rear
- Three burner sizes efficiently deliver heat to any size cookware
- **EXCLUSIVE** VariSimmer™ Setting on ALL burners provides gentle, even simmering at precisely low cooking temperatures
- **EXCLUSIVE** SureSpark™ Ignition System, ensures automatic ignition/re-ignition, should the burners extinguish at any time while cooking




### Reversible Grill/Griddle

- Thermostatically controlled reversible grill/griddle heats evenly to provide consistent cooking across the entire surface and can be easily removed for cleaning
- Grill/griddle is coated with ceramic non-stick finish
- **PATENT PENDING** Grease Management System™ that strategically directs excess grease into an easily-removable capture trough for quick and easy cleanup
- **PATENT PENDING** StayCool™ Trough Handle is designed to resist heat from the griddle so that the trough can be easily removed and hot grease discarded



### Easy Operation and Cleanup

- SoftLit™ LED Lights accent the control panel and illuminate knobs
- **EXCLUSIVE** seamless, heavy gauge porcelain burner pan with elevated flame ports prevent spillovers from baking on, making cleanup easy
- Continuous grate design allows easy movement of pots and pans from burner to burner
- Grates, burner caps, knobs, griddle and grill accessories can be easily removed and taken to the sink for cleaning

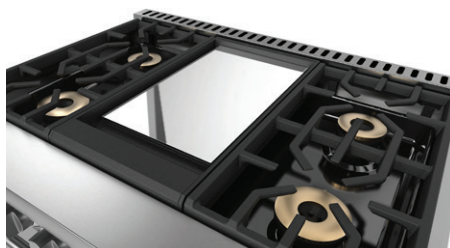

### ViChrome™ Griddle – Optional Accessory

- Inspired by the Viking Commercial plancha, the ViChrome™ Griddle accessory interchanges with reversible grill/griddle providing versatility for griddling and defrosting



### The Industry's Best and Most Comprehensive Warranty

- **3-year** full - complete product
- **90-day** full – cosmetic parts such as glass, painted items and decorative items
- **5-year** limited – gas burners

## SPECIFICATIONS\*

Gas 36" and 48"W. Rangetops		
Description	VGRT7366B VGRT7364G	VGRT7488B VGRT7486G
Overall width	35-7/8" (91.1 cm)	47-7/8" (121.6 cm)
Overall height (from bottom)	To top of grate – 8-3/4" (22.2 cm) To top of island trim – 9" (22.9 cm)	
Additions to overall height	To top of backguard—add 10" (25.4 cm) To top of high shelf—add 24-1/8" (61.3 cm)	
Overall depth (from rear)	To end of side panel—25-1/4" (64.1 cm) To end of landing edge—29-3/4" (75.6 cm) To end of knobs—30" (76.2 cm)	
Cutout dimensions	Cutout width—36" (91.4 cm) Cutout height—7-5/8" (19.4 cm) Cutout depth—min. 24" (61.0 cm), max. 25-1/4" (64.1 cm)	Cutout width—48" (121.9 cm) Cutout height—7-5/8" (19.4 cm) Cutout depth—min. 24" (61.0 cm), max. 25-1/4" (64.1 cm)
Gas requirements	Shipped natural or LP/Propane gas; field convertible with conversion kit (purchased separately); minimum required service line 1/2" (1.3 cm) ID NPT.	
Gas manifold pressure	Natural 5.0" W.C.P. / Liquid propane L/P 10.0" W.C.P.	
Electrical requirements	120 VAC/60 Hz 4ft. (121.9 cm), 3-wire cord with grounded 3-prong plug	
Max. amp usage	0.5 amps	
Surface burner rating Natural gas/LP	(3) Front 23,000 BTU (6.7 kW)/20,000 BTU (5.8kW) (2) Rear 15,000 BTU (4.4 kW)/13,500 BTU (4.0 kW) (1) Rear 8,000 BTU (2.3 kW)/8,000 BTU (2.3 kW)	(4) Front 23,000 BTU (6.7 kW)/20,000 BTU (5.8kW) (3) Rear 15,000 BTU (4.4 kW)/13,500 BTU (4.0 kW) (1) Rear 8,000 BTU (2.3 kW)/8,000 BTU (2.3 kW)
Griddle burner rating Natural/LP (if applicable)	15,000 BTU (4.4 kW)/13,500 BTU (4.0 kW)	
Approximate shipping weight	192 lbs. (87.1 kg)	242 lbs. (109.8 kg)

\*Always refer to installation instructions included with product or visit [vikingrange.com/specs](http://vikingrange.com/specs) for the most accurate cutouts and installation requirements.

800-570-3355





For detailed product information, model numbers, or to request a quote call 1-888-845-4641 or visit [vikingrange.com](http://vikingrange.com)

Viking Range, LLC products are sold under the Brigade brand exclusively in Canada.

