

BUILT-IN 5 SERIES GAS COOKTOPS

Viking Professional 5 Series – VGSU

COMMERCIAL-TYPE COOKING POWER

- Highest combined BTU rating in the industry, featuring sealed burners with brass burner rings in a wide variety of sizes
- Powerful 18,000 BTU burner delivers commercial power for high heat sautéing, rapid boiling and quick recovery
- Simmer settings on all burners allows low BTU output for heating delicate sauces
- **EXCLUSIVE** SureSparkTM Ignition System ensures automatic ignition/re-ignition should flame extinguish at any time while cooking

GAS 30"WIDE COOKTOP

- Left front 18,000 BTU high
- Left rear 12,000 BTU high
- Center 12,000 BTU high
- Right front 6,000 BTU high
- Right rear 8,000 BTU high

GAS 36"WIDE COOKTOP

- Left front 18,000 BTU high
- Left rear 10,000 BTU high
- Center front 12,000 BTU high
- Center rear 12,000 BTU high
- Right front 6,000 BTU high
- Right rear 8,000 BTU high

EASY MAINTENANCE AND CLEANUP

- Updated commercial-type styling incorporates refined detailing
- Permanently sealed burners prevent spills from entering burner box
- Deep, seamless recessed burner pan retains liquid spills
- Durable laser-etched graphics withstand the rigors of regular cleaning
- Removable knobs, grates, and burner ports/caps make cleanup easy



SAFE-EASY OPERATION

- Child proof, push-to-turn metal knobs for safe use
- Automatic electric spark ignition means no standing pilot to re-light, waste energy or add extra heat to the kitchen
- **EXCLUSIVE** ScratchSafe[™] Grate Design provides ultimate protection from scratches and ensures proper placement of the heavy-duty, porcelain-coated cast iron grate

MODEL NUMBERS

- VGSU5305BSS 30"W. Gas Cooktop; five burners
- VGSU5366BSS 36"W. Gas Cooktop; six burners

ACCESSORIES

- PGDVGC Portable non-stick cast aluminum griddle fits securely onto grates for griddling or defrosting food
- WRGVGC Porcelain-coated cast iron wok ring fits securely over grates to accommodate a traditional wok
- LPKVGC LP/Propane Conversion Kit
- NATVGC Natural Gas Conversion Kit
- NKHAVGC High Altitude Natural Gas Conversion Kit

COLOR FINISHES

Available in Stainless Steel (SS)

WARRANTY

- 3-year full complete product
- 90-day full cosmetic parts such as glass, painted items and decorative items
- 5-year limited gas surface burners






BUILT-IN 5 SERIES GAS COOKTOPS

Viking Professional 5 Series – VGSU

VGSU5305B erall Width 30-3/4" (78.1 cm) erall Height 4-1/2" (11.4 cm) erall Depth from rear 21" (53.3 cm) tout Width 27-3/4" (70.5 cm) minimum to 29-3/8" (74.6 cm) maximum tout Height 2-3/4" (7.0 cm) tout Depth 19-1/8" (48.6 cm) minimum to 20-1/8" (51.8 Requirements Shipped Natural or LP/Propane, field convert with con accepts standard residential 1/2" (1.3 cm)	VGSU5366B 36-3/4" (93.3 cm) 33-3/4" (85.7 cm) minimum to	
A-1/2" (11.4 cm) A-1/2" (11.		
21" (53.3 cm) 27-3/4" (70.5 cm) minimum to 29-3/8" (74.6 cm) maximum 2-3/4" (7.0 cm) 27-3/4" (70.5 cm) minimum to 29-3/8" (74.6 cm) maximum 2-3/4" (7.0 cm) 27-3/4" (7.0 cm) 27-3/8" (38.6 cm) minimum to 20-1/8" (51.8 Requirements 27-3/8" (38.6 cm) minimum to 20-1/8" (38.6 cm) minimum to 20-	33-3/4" (85.7 cm) minimum to	
tout Width 27-3/4" (70.5 cm) minimum to 29-3/8" (74.6 cm) maximum tout Height 2-3/4" (7.0 cm) tout Depth 19-1/8" (48.6 cm) minimum to 20-1/8" (51. s Requirements Shipped Natural or LP/Propane, field convert with converting tout tout properties of the converting tout prop	33-3/4" (85.7 cm) minimum to	
29-3/8" (74.6 cm) maximum 2-3/4" (7.0 cm) tout Depth 19-1/8" (48.6 cm) minimum to 20-1/8" (51. s Requirements Shipped Natural or LP/Propane, field convert with converting to the convert with converting to the converting to	33-3/4" (85.7 cm) minimum to	
tout Depth 19-1/8" (48.6 cm) minimum to 20-1/8" (51. s Requirements Shipped Natural or LP/Propane, field convert with con	35-3/8" (89.9 cm) maximum	
Shipped Natural or LP/Propane, field convert with con-		
	1 cm) maximum	
ctrical Requirements 120 V 60 Hz; 4 ft. (121.9 cm), 3-wire cord with grounded 3-	120 V 60 Hz; 4 ft. (121.9 cm), 3-wire cord with grounded 3-prong plug attached to product	
ximum Amp Usage 1.0 amps	1.0 amps	
Face Element Rating Right front 18,000 Nat./16,500 LP (BTU) (5.4 Nat./4.9 LP (kw) Right rear 12,000 Nat./11,000 LP (BTU) (3.6 Nat./3.3 LP (kw) Center rear 12,000 Nat./11,000 LP (BTU) (3.6 Nat./3.3 LP (kw) N/A Left rear 6,000 Nat./6,000 LP (BTU) (1.8 Nat./1.8 LP (kw) 8,000 Nat./7,000 LP (BTU) (2.4 Nat./2.1 LP (kw)	18,000 Nat./16,500 LP (BTU) (5.4 Nat./4.9 LP (kw) 10,000 Nat./9,000 LP (BTU) (3.0 Nat./2.7 LP (kw) 12,000 Nat./11,000 LP (BTU) (3.6 Nat./3.3 LP (kw) 12,000 Nat./11,000 LP (BTU) (3.6 Nat./3.3 LP (kw) 6,000 Nat./6,000 LP (BTU) (1.8 Nat./1.8 LP (kw) 8,000 Nat./7,000 LP (BTU) (2.4 Nat./2.1 LP (kw)	
proximate Shipping Weight 67 lb. (30.2 kg)	80 lb. (36.0 kg)	

Please do not prepare installation from brochure data only. See installation instructions for important clearance/installation information.

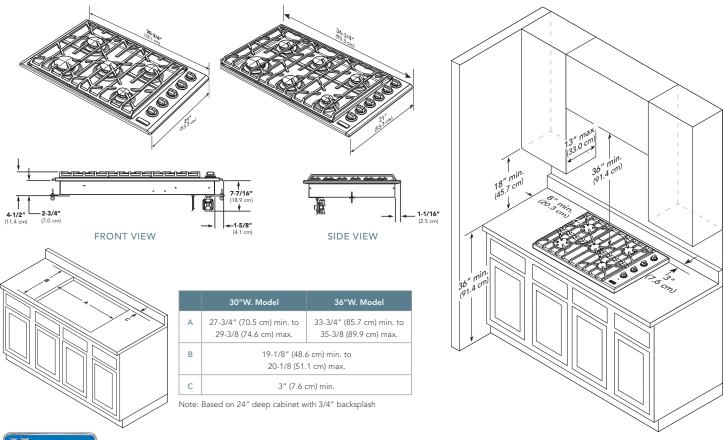

For detailed product information, model numbers, or to request a quote call 1-888-845-4641 or visit vikingrange.com © 2014 Viking Range, LLC All rights reserved. Specifications subject to change without notice.

F60344 1214

VIKING RANGE, LLC 111 FRONT STREET GREENWOOD, MISSISSIPPI 38930 USA