



UNDERCOUNTER REFRIGERATED DRAWERS

Viking Professional 5 Series – VRDI/VRDO

PROFESSIONAL FEATURES

- 2014 Energy Compliant
- Electronic controls with digital temperature readout
 - Temperature can be adjusted from 33 to 39 degrees F (0.6 to 3.9 degrees C); factory set at 34 degrees F (1.1 degrees C)
- Can be displayed in either Fahrenheit or Celsius
- 5.3 cubic feet of storage
- 200-pound capacity full extension drawers
- LED lighting

PROFESSIONAL-STYLE CONSTRUCTION

- Undercounter or freestanding installation
- Forced air cooling system
- Powerful 700 BTU compressor
- Stainless steel interior
- Stainless steel exterior cabinet
- Tru-Flush design allows refrigerator to fit flush into 24" deep installation cutout
- Super quiet 39 dB sound rating
- Black kickplate (indoor unit)
- Adjustable leveling legs

AGENCY-CERTIFIED OUTDOOR MODEL

- Insulated electrical terminals, sealed electrical contacts, and a water-resistant thermostat provide optimal performance in all weather elements
- Door lock
- Stainless steel kickplate



MODEL NUMBERS

- VRDI5240DSS – 24"W. Refrigerated Drawers (indoor unit)
- VRDO5240DSS – 24"W. Refrigerated Drawers (outdoor unit)

COLOR FINISHES

- Available in Stainless Steel (SS)

WARRANTY

- 3-year full covers complete indoor unit
- 2-year full covers complete outdoor unit
- 6-year full – sealed refrigeration system
- 90-day full – cosmetic parts such as glass, painted items, and decorative items
- 12-year limited – sealed refrigeration system






UNDERCOUNTER REFRIGERATED DRAWERS

Viking Professional 5 Series – VRDI/VRDO

| 24" W. REFRIGERATED DRAWERS | |
|-----------------------------|--|
| DESCRIPTION | VRDI/VRDO5240 |
| Overall Width | 23-7/8" (60.6 cm) |
| Overall Height | 34 1/4" (87.0 cm) minimum; 35" (89.0 cm) maximum |
| Overall Depth from Rear | To end side panel – 22-1/16" (56.0 cm) To front of door panel – 24 1/16" (61.1 cm) To front of handle – 26 9/16" (67.5 cm) |
| Cutout Width | 24" (61.0 cm) |
| Cutout Height | 34 1/2" (87.6 cm) minimum; 35 1/2" (90.2 cm) maximum |
| Cutout Depth | 24" (61.0 cm) |
| Electrical Requirements | 115VAC/60Hz; 15-amp dedicated circuit; 5' (152.4 cm) power cord attached to product |
| Maximum Amp Usage | 3.0 amps |
| Maximum Storage Capacity | 5.3 cu. ft. |
| Approximate Shipping Weight | 200 lb. (91 kg) |

Please do not prepare installation from brochure data only. See installation instructions for important clearance/installation information.

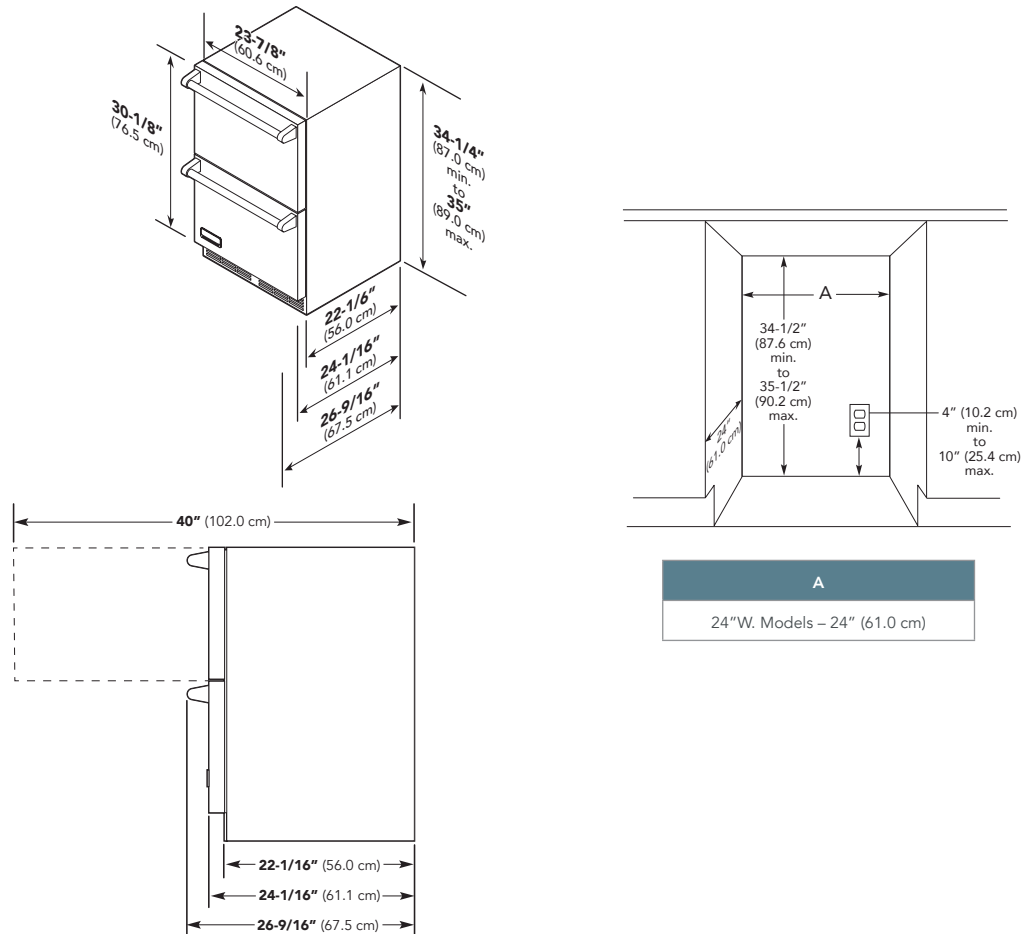

VIKING RANGE, LLC 111 FRONT STREET GREENWOOD, MISSISSIPPI 38930 USA

For detailed product information, model numbers, or to request a quote call 1-888-845-4641 or visit vikingrange.com
© 2014 Viking Range, LLC All rights reserved. Specifications subject to change without notice.