



Powered by the exclusive iQ Blower System™ with GPS Technology (see page 62) for the quietest, most energy efficient and fastest smoke and odor removal available in a range hood; external blowers offered separately.

LED lighting has an extremely long lifespan; lamps may never need replacement.

Quick release, dishwasher-safe, stainless steel with mesh grease filters ensure a clean, fresh kitchen.

Heat Sentry™ detects excessive heat and adjusts blower to high automatically.

Works with optional Universal Make-Up Air Dampers.

#### Model Numbers:

WC44IQ90SB

WC44E90SB



Clear glass visor extends capture without sacrificing the light airy style.



Three-speed plus boost electronic pushbutton controls, with speed display, include 10-minute delay-off and filter clean reminder.



LED lighting produces beautiful bright, clean light using minimal energy.



#### Hood Sizes

<b>Width</b>	<b>35-7/16" (90cm)</b>
<b>Depth</b>	<b>17-1/2"</b>

#### Finish

Stocked	Brushed Stainless Steel with Glass Visor
Special Order	Not Available

#### Features

Lighting Type	LED 6-watts
Number of Lamps	2
Lighting Levels	1
Lighting Lamps Included	Yes
Control Type	3-speed Plus Boost Electronic Pushbutton with Display
Control Features	Heat Sentry™, Delay Off, Filter Clean Reminder
Remote Control	Not Available
Filter Type	Stainless Steel with Mesh Grease Filter
Non-ducted Capability	Yes

#### Hood Blower Included (WC44IQ)

<b>Internal</b>	<b>iQ6</b>
Blower CFM	600
Sones Low/High	0.3/7.5

#### Hood Blower Options (WC44E blowers sold separately)


External In-line	ILB3	ILB6	ILB9	ILB11
Max CFM	280	600	800	1100
Sone levels are typically half of comparable CFM internal blowers.				
External Exterior	EB6	EB9	EB12	EB15
Max CFM	600	900	1200	1500
Sone levels are typically half of comparable CFM internal blowers.				

#### Accessories

10'-11' Flue Extension (Ducted)	AEWC345IQSB
10'-11' Flue Extension (Non-ducted)	AEWC345IQSBN
Non-Duct Kit	ANKWC345
Non-Duct Filter	AFCWC345
Universal MUA Damper	MD6TU, MD8TU, MD10TU

#### Installation Requirements

Amps @ 120V: Internal Blower	4.0
Amps @ 120V: External Blower	7.0 Max
Electrical Connection	Plug In
Duct Size: Internal Blower	8"
Duct Size: External Blower	8" at hood (Transition to 10" typical, see pages 64-65)
Duct Direction	Vertical
Backdraft Damper	Included

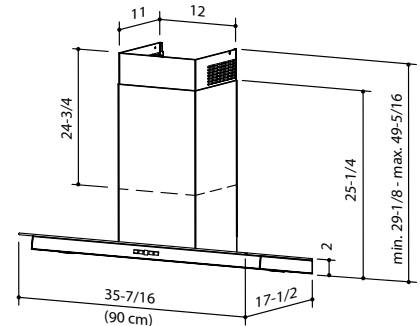

Installation height above the cooking surface: 24"-30"

Telescopic flue for 8'-9' ceiling is standard. Optional flue extensions for 10'-11' ceiling

Reversible telescopic flue allows non-ducted recirculation. (see page 68)

For more details see the product specifications sheet found at [www.BESTRangeHoods.com](http://www.BESTRangeHoods.com)