SPECIFICATION SHEET

best

HARMONIA WC45E SERIES RANGE HOOD

Glass and stainless steel intersect, joining together to form a beautiful union. Harmonia is a hood unlike any other - where form, materials and technology merge to form an absolutely unique result.

FEATURES


- Italian design
- Wall mount
- Finishes: 430 Stainless Steel, #4 Brushed
- Width: 90 cm (35-7/16-in.)
- Telescopic flue accommodates 8' to 9' ceilings
- 8" round duct connector/backdraft damper
- 1-level LED lighting (2 LED modules, 6 Watts max.)
- 4-speed, IR touch-free control senses finger location to activate control without actually touching it
- Use with exterior-mounted or inline remote blowers for different levels of exhaust capacity (see specifications)
- Heat Sentry[™] automatically turns blower to high speed when excess cooking heat is detected
- Delay timer control automatically shuts off range hood after 10 minutes
- Special control indicates when it's time to clean the filter
- Dishwasher-safe filter features a quick-release latch
- · For indoor use only

OPTIONS

- 8-in. to 10-in. transition (Model 414)
- Flue extension for 10-ft. to 11-ft. ceilings (Model AEWC345IQSB)

SPECIFICATIONS

| | OPTIONAL ER MODELS | BLOWER CFM | VOLTS | AMPS | DUCT |
|-------|---|---------------|-------|--|--|
| EB6 | EB9 wall or roof mount EB12 blowers | 600 max. | 120 | 0.40 (lights only) + 6.0 max. (blower only) | 8-in. round at the hood. See blower specs for duct requirements. |
| EB9 | | 900 max. | | | |
| EB12 | | 1200 max. | | | |
| EB15 | | 1500 max. | | | |
| ILB3 | inline blowers | 280 max. | | | |
| ILB6 | | 600 max. | | | |
| ILB9 | | 800 max. | | | |
| ILB11 | | 1100 max. | | | |




BEST Hartford, Wisconsin www.BestRangeHoods.com 800-558-1711 BEST Drummondville, QC, Canada www.BestRangeHoods.com 866-737-7770

. .

| REFERENCE | QTY. | REMARKS | Project | | |
|-----------|------|---------|-------------------|--|--|
| | | | Location | | |
| | | | Architect | | |
| | | | Engineer | | |
| | | | Contractor | | |
| | | | Submitted by Date | | |

WC45E SERIES WIRING

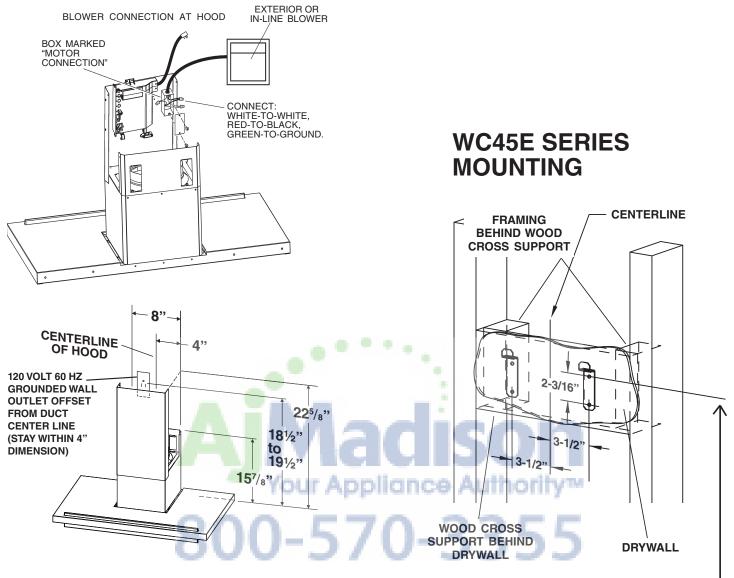

| CEILING HEIGHT | DUCT METHOD | 24" | 25" | E ABOVE 3 26" CENTER HC | 27" | 28" | 29" | 30" |
|-----------------------------------|----------------|-----------|-----------|---------------------------------|-----------|-----------|-----------|-----------|
| 8 FEET | DUCTED | 37-11/16" | 38-11/16" | 39-11/16" | 40-11/16" | 41-11/16" | 42-11/16" | 43-11/16" |
| 9 FEET | DUCTED | 37-11/16" | 38-11/16" | 39-11/16" | 40-11/16" | 41-11/16" | 42-11/16" | 43-11/16" |
| 10 FEET (see note b.) | DUCTED | 37-11/16" | 38-11/16" | 39-11/16" | 40-11/16" | 41-11/16" | 42-11/16" | 43-11/16" |
| 11 FEET (see notes a. & b.) | DUCTED | 37-11/16" | 38-11/16" | 39-11/16" | 40-11/16" | 41-11/16" | 42-11/16" | 43-11/16" |

a. Minimum hood distance above cook top must not be less than 24". A maximum of 30" above cook top is highly recommended for best capture of cooking impurities. Distances over 30" are at the installer and user's discretion; and if ceiling height and flue length permit.

b. Requires optional 10-ft. to 11-ft. flue extension, ducted model AEWC345IQSB.

